




Version 1.0

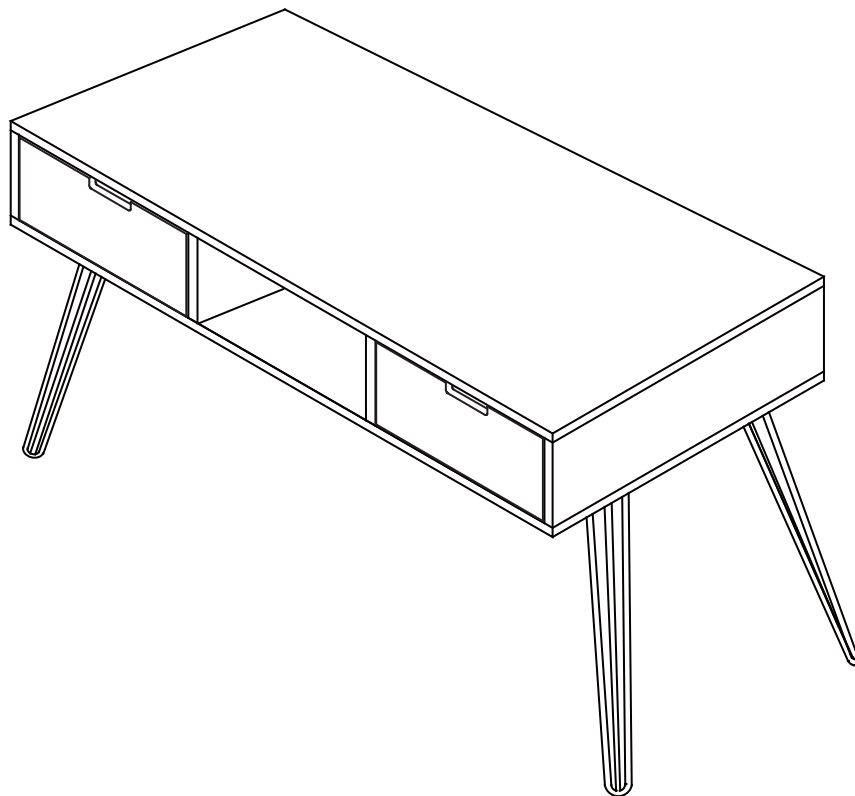

JUNO

DESK 2 DRAWER

www.fantasticfurniture.com.au

Recommended weight capacity : 50KG.

Enjoy


Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.

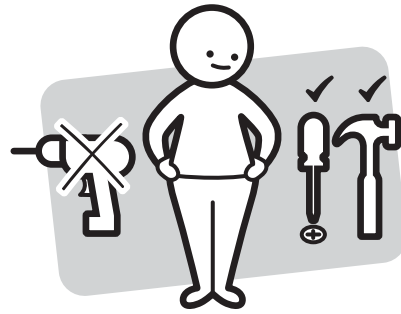

Make sure you have all the required tools.
Never use power tools unless instructed.

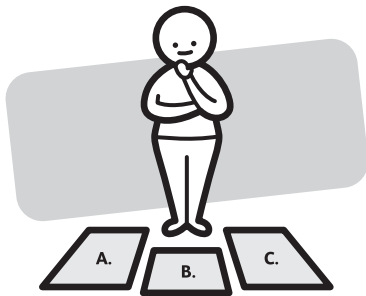

Identify and lay out all of the components before you begin assembly.

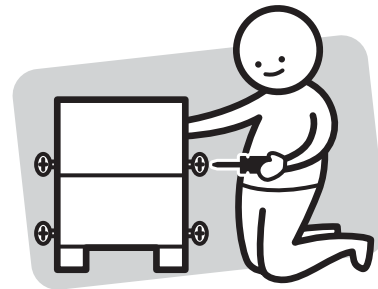

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need to assemble the product



DO NOT USE




Other tools you need


Phillips head screwdriver;

Parts list



Box 1: Top panel (P1);
Left Side Panel(P2);
Right Side Panel (P3);
Bottom Panel (P4);
Left Divider (P5);
Right Divider (P6);
Back Panel (P7);
4 x Leg (P8);
2 x Drawer Front (P9);
2 x Left Drawer Side (P10);
2 x Right Drawer Side(P11);
2 xDrawer Back (P12);
2 x Drawer Base (P13);
Rail (P14)

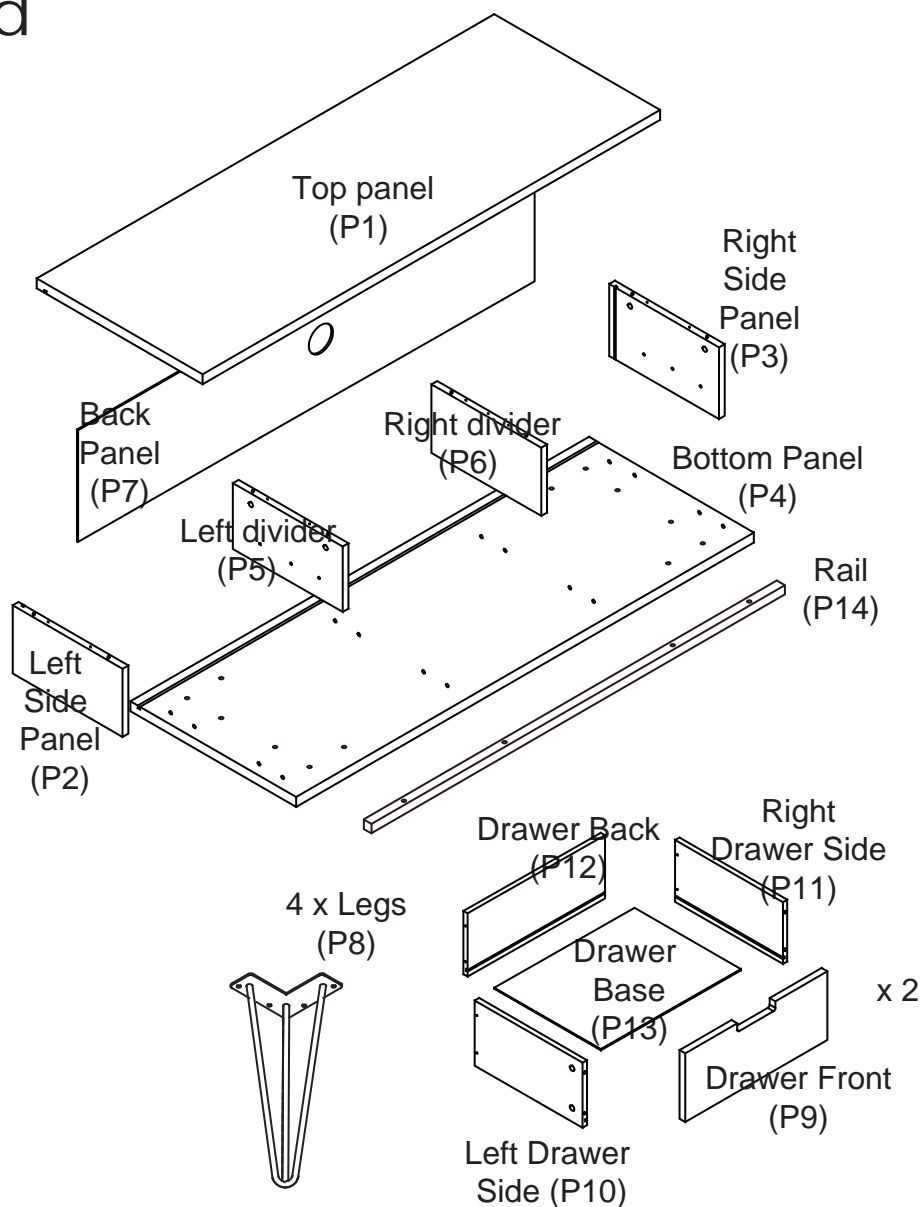


Hardware Pack

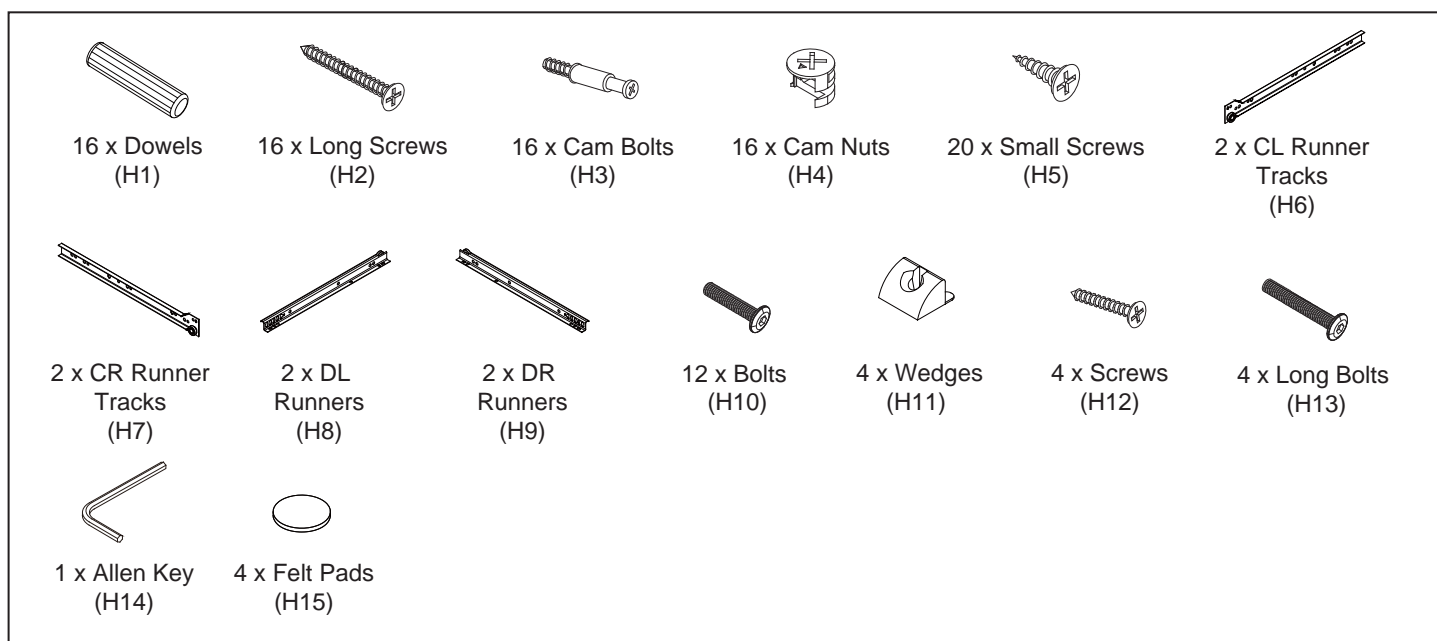





Step 1




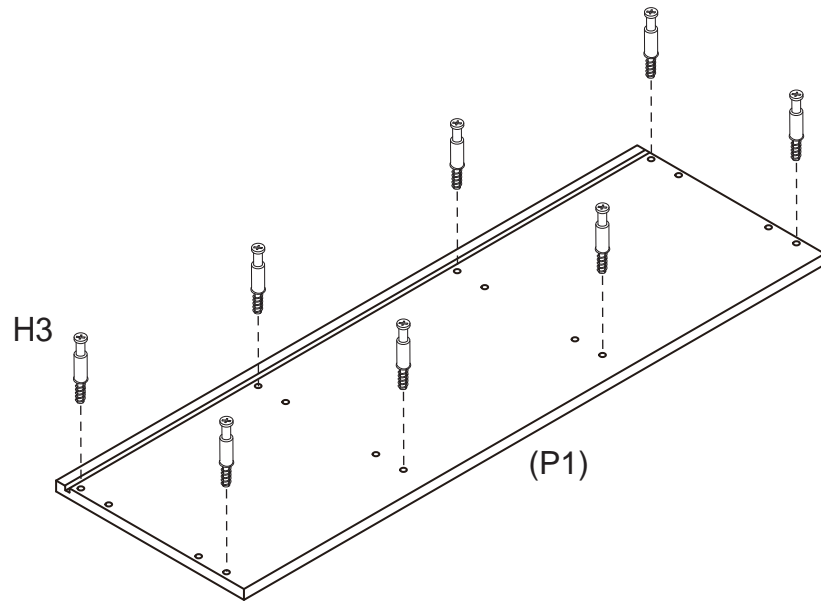
You will need	
	
8 x Cam Bolts (H3)	Phillips head screwdriver



Attach 8 x cam bolts (H3) to top panel (P1) as shown. Tighten with a Phillips head screwdriver.





Step 2


You will need	
	
6 x Small Screws (H5)	Phillips head screwdriver
	
1 x CL Runner Tracks (H6)	1 x CR Runner Tracks (H7)

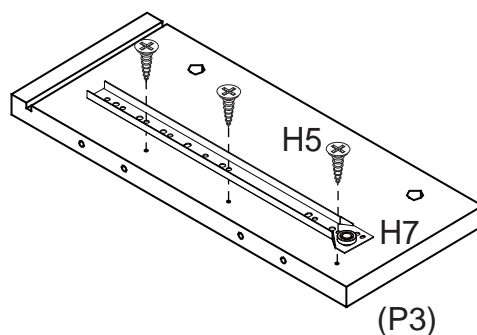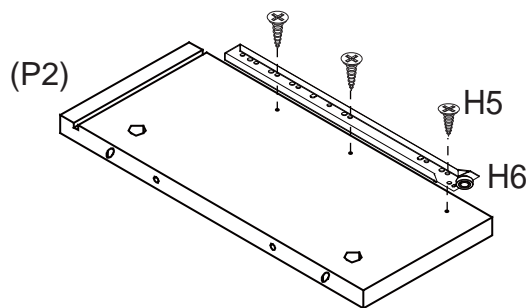

Attach 1 x CL runner tracks (H6) to left side panel (P2) with 3 x small screws (H5).
1 x CR runner tracks (H7) to right side panel (P3) with 3 x small screws (H5).
Tighten with a Phillips head screwdriver.




Step 3

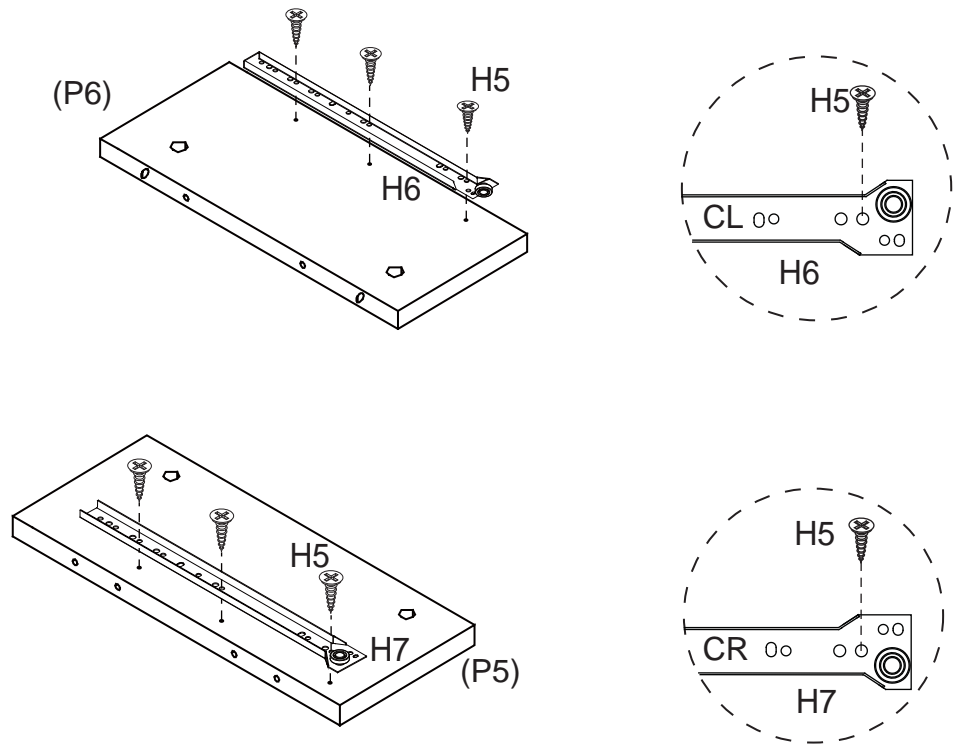You will need	
	
6 x Small Screws (H5)	Phillips head screwdriver
	
1 x CL Runner Tracks (H6)	1 x CR Runner Tracks (H7)




Attach 1 x CR runner tracks (H7) to left divider (P5) with 3 x small screws (H5). Attach 1 x CL runner tracks (H6) to right divider (P6) with 3 x small screws (H5). Tighten with a Phillips head screwdriver.


Step 4

You will need	
	
8 x Dowels (H1)	Phillips head screwdriver
	
8 x Cam Nuts (H4)	

This is how a cam nut works.....






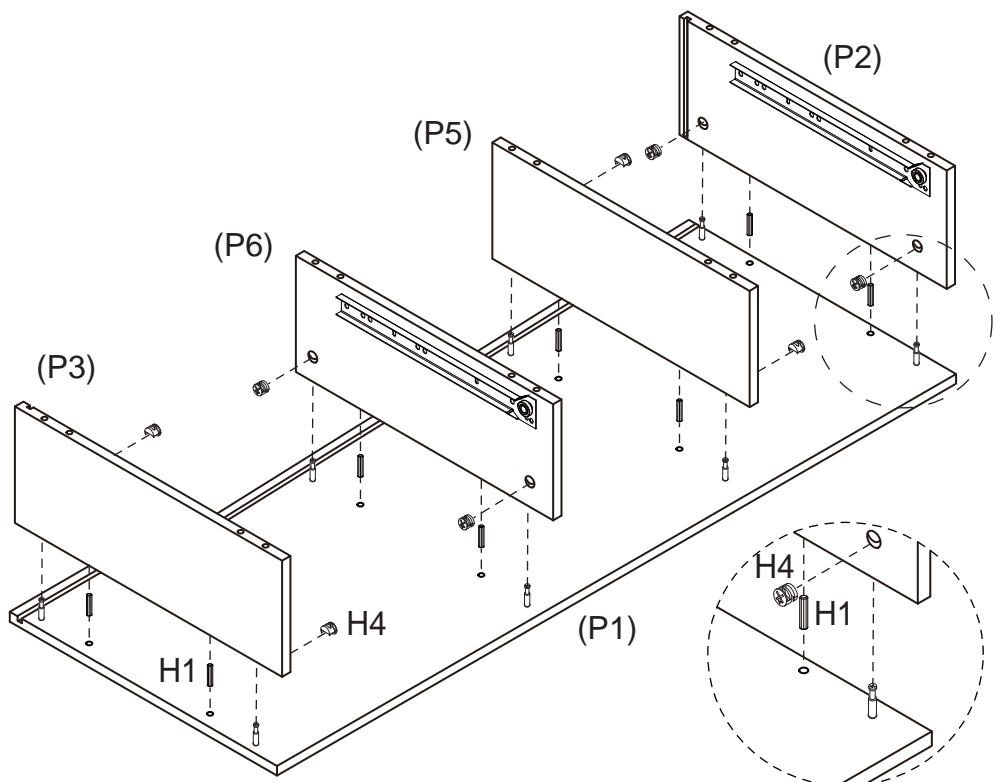


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Attach left side panel (P2), right side panel (P3), left divider (P5) and right divider (P6) to top panel (P1) with 8x dowels (H1), and secure with 8x cam nuts (H4). Tighten with a Phillips head screwdriver.




Step 5

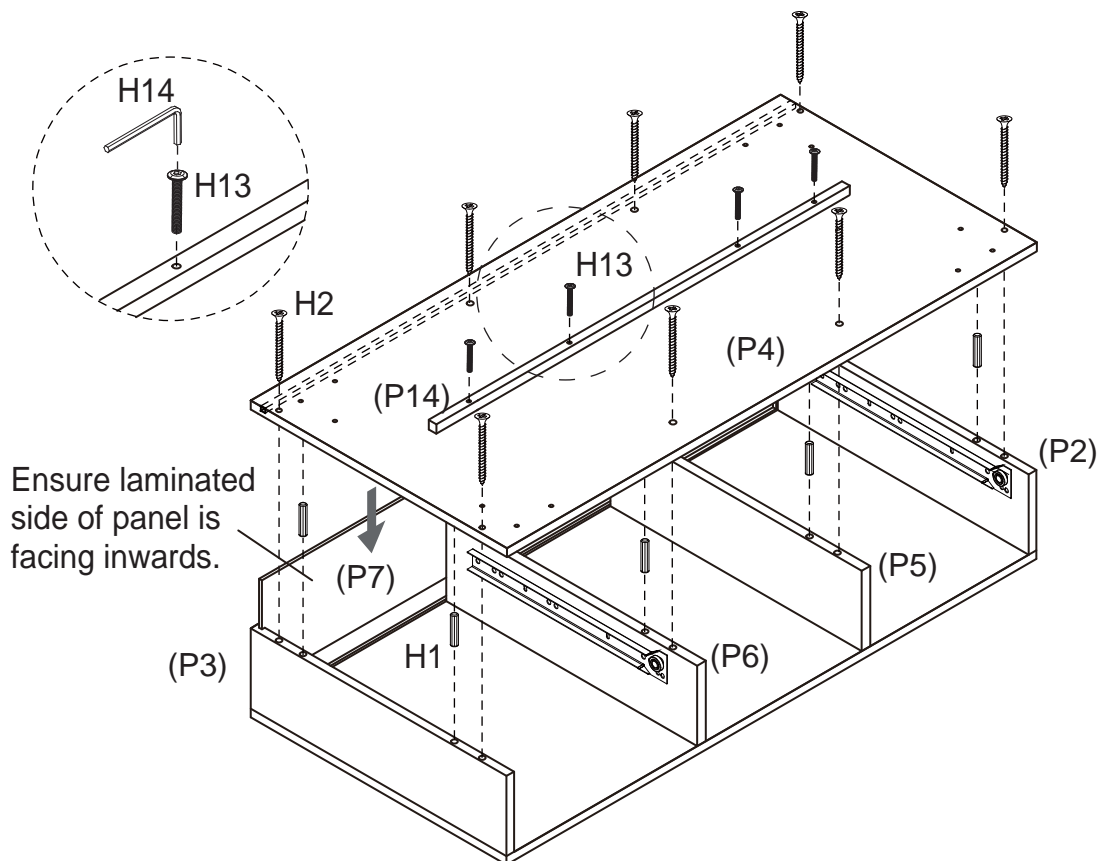
You will need	
	
8 x Dowels (H1)	Phillips head screwdriver
	
8 x Long Screws (H2)	4 x Long Bolts (H13)
	
1 x Allen Key (H14)	



Slide back panel (P7) into the groove of left side panel (P2) and right side panel (P3). Attach rail (P14) to bottom panel (P4) secure with 4 x long bolts (H13). Tighten with an Allen key (H14). Attach bottom panel (P4) to the main unit with 8x dowels (H1), and secure with 8x long screws (H2). Tighten with a Phillips head screwdriver.



Step 6


You will need	
	
12 x Bolts (H10)	1 x Allen Key (H14)
	
4 x Felt Pads (H15)	

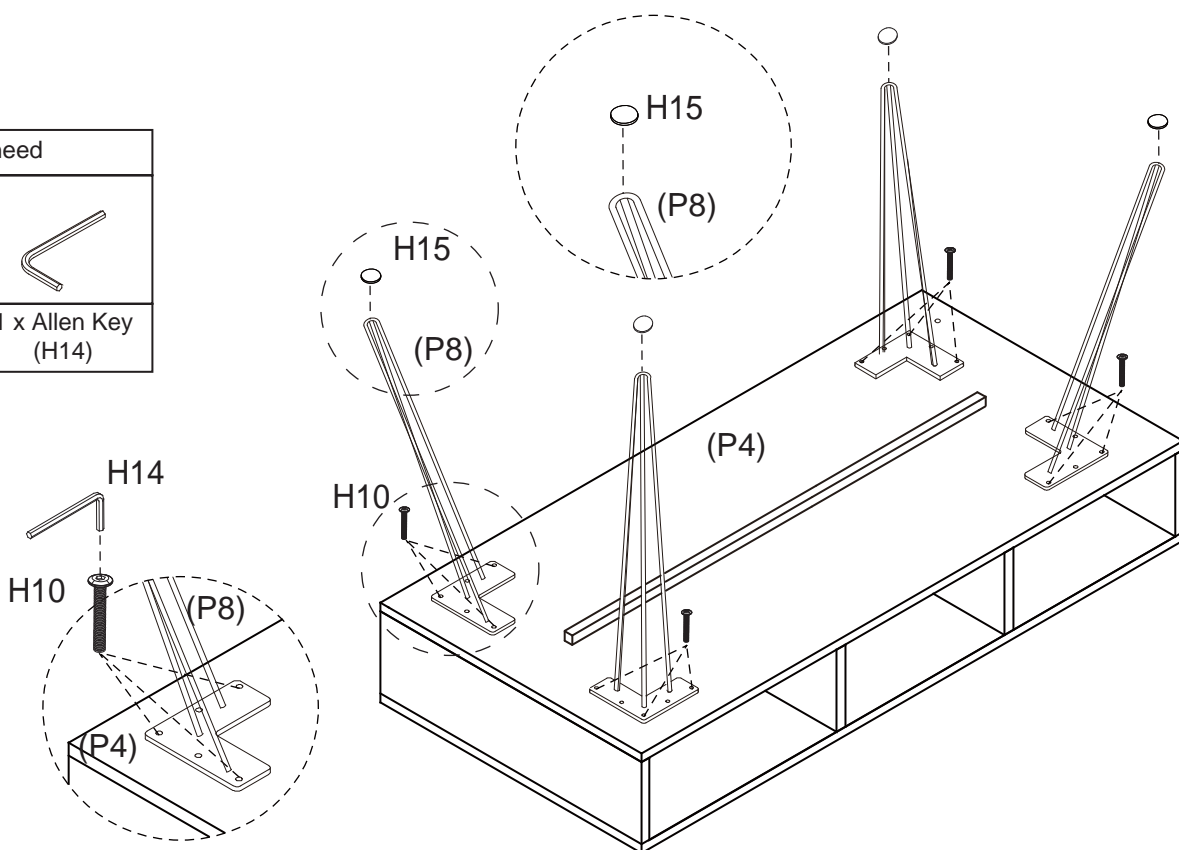

Attach 4x legs (P8) to bottom panel (P4) and secure with 12 x bolts (H10). Tighten with an Allen key (H14). Apply 4 x felt pads (H15) to bottom of legs (P8) as shown.



Step 7

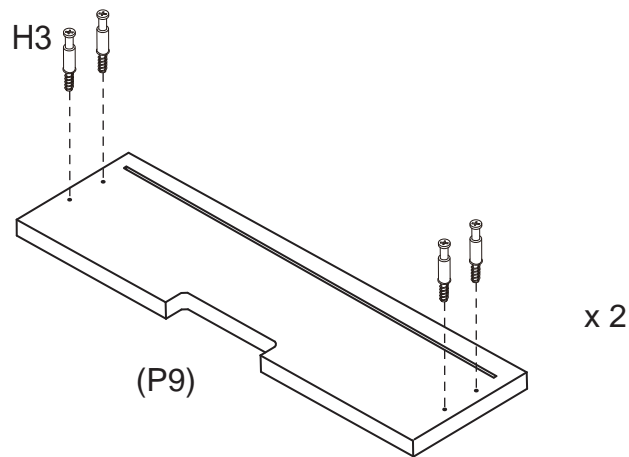
You will need	
	
8 x Cam Bolts (H3)	Phillips head screwdriver




Screw 4 x cam bolts (H3) into drawer front (P9) with a Phillips head screwdriver.
Repeat for second drawer.

Step 8

You will need	
	
8 x Cam Nuts (H4)	Phillips head screwdriver

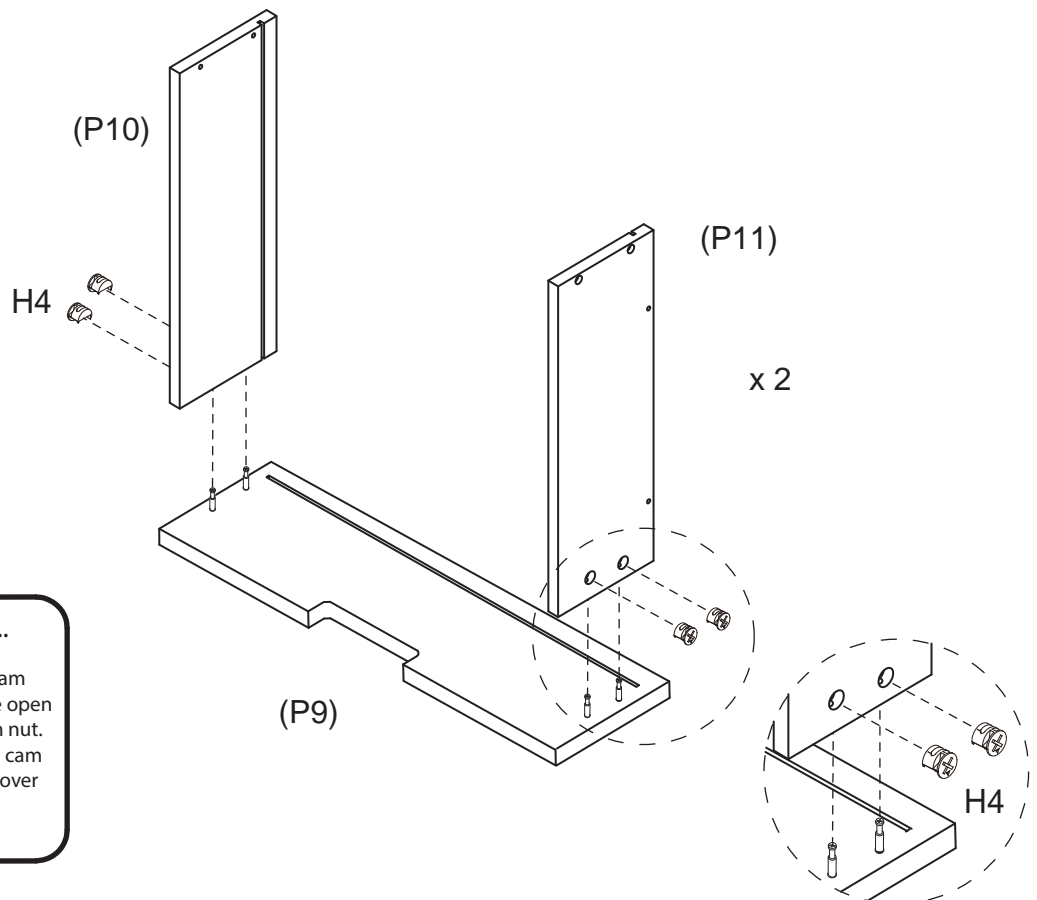


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Attach drawer sides (P10, P11) to drawer front (P9). Insert 4 x cam nuts (H4) into the holes of drawer sides (P10, P11). Make sure the opening on cam nuts point towards the incoming cam bolts. Tighten the cam nuts using a Phillips head screwdriver.
Repeat for second drawer.

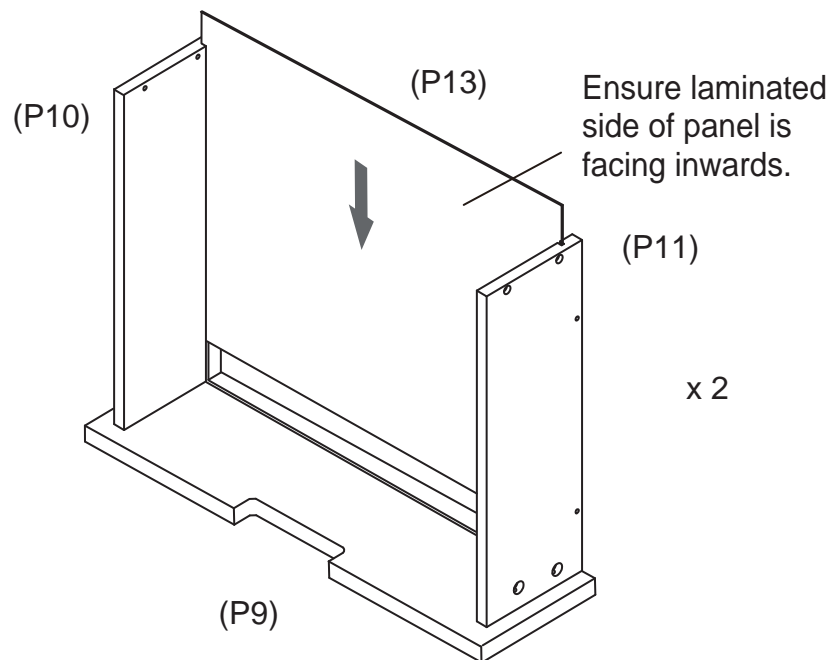
Step 9



Slide drawer base (P13) into the groove of drawer sides (P10, P11). Repeat for second drawer.





Step 10

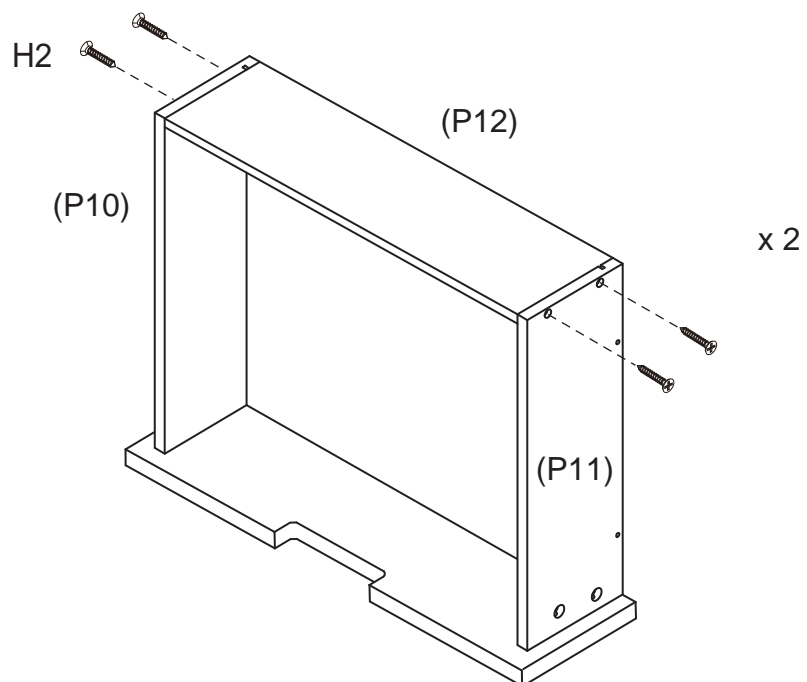
You will need	
	
8 x Long Screws (H2)	Phillips head screwdriver



Attach drawer back (P12) to drawer sides (P10, P11) with 4 x long screws (H2), make sure that the groove lines up the whole way around the drawer. Tighten screws using a Phillips head screwdriver. Repeat for second drawer.


Step 11

You will need	
	
8 x Small Screws (H5)	Phillips head screwdriver
	
2 x DL Runner (H8)	2 x DR Runner (H9)

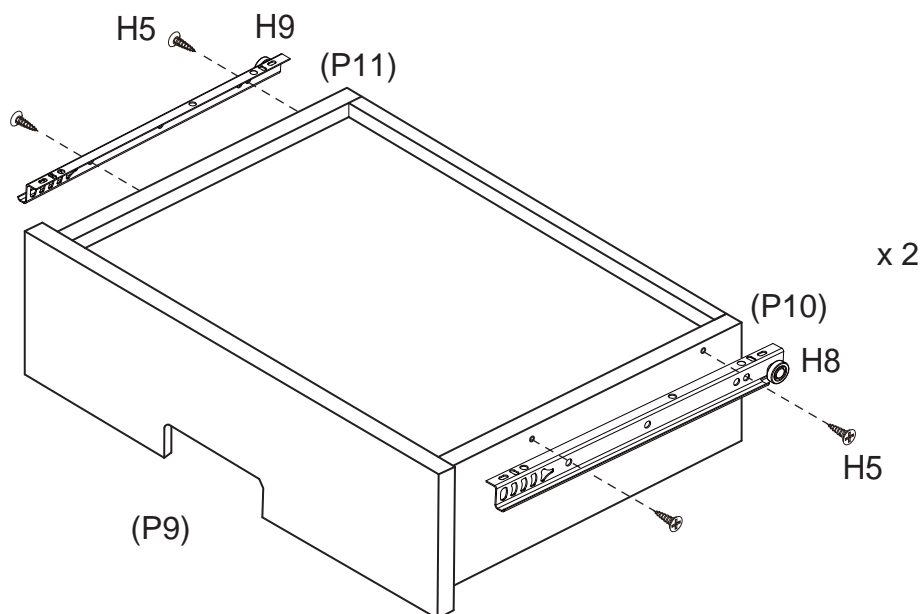




Attach 1 x DL runner (H8) to left drawer side (P10) and 1 x DR runner (H9) to right drawer side (P11) with 4 x small screws (H5). Tighten screws using a Phillips head screwdriver. Repeat for second drawer.

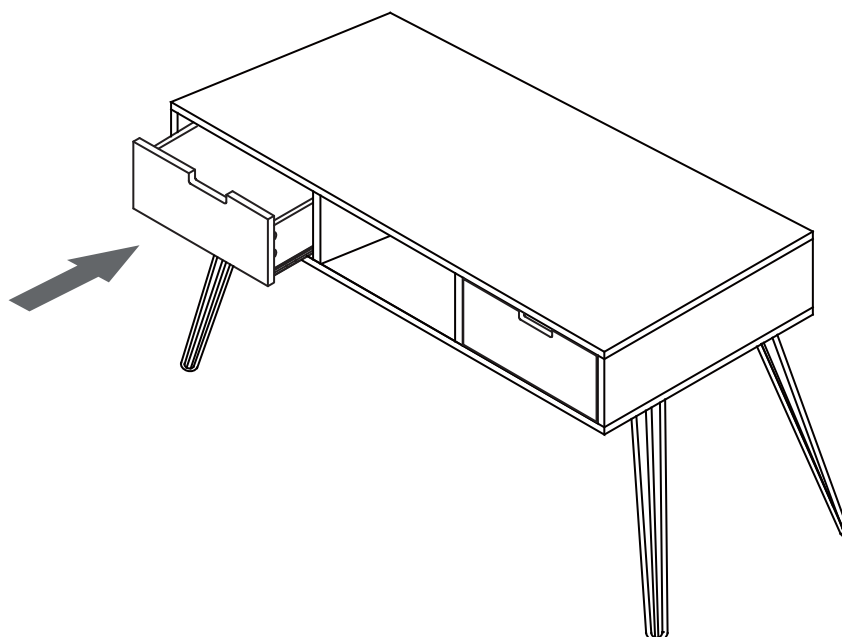
Step 12



Carefully turn the desk over to an upright position. Slide the drawers into the desk front.


Step 13

You will need	
	
4 x Wedges (H11)	4 x Screws (H12)
	
Phillips head screwdriver	

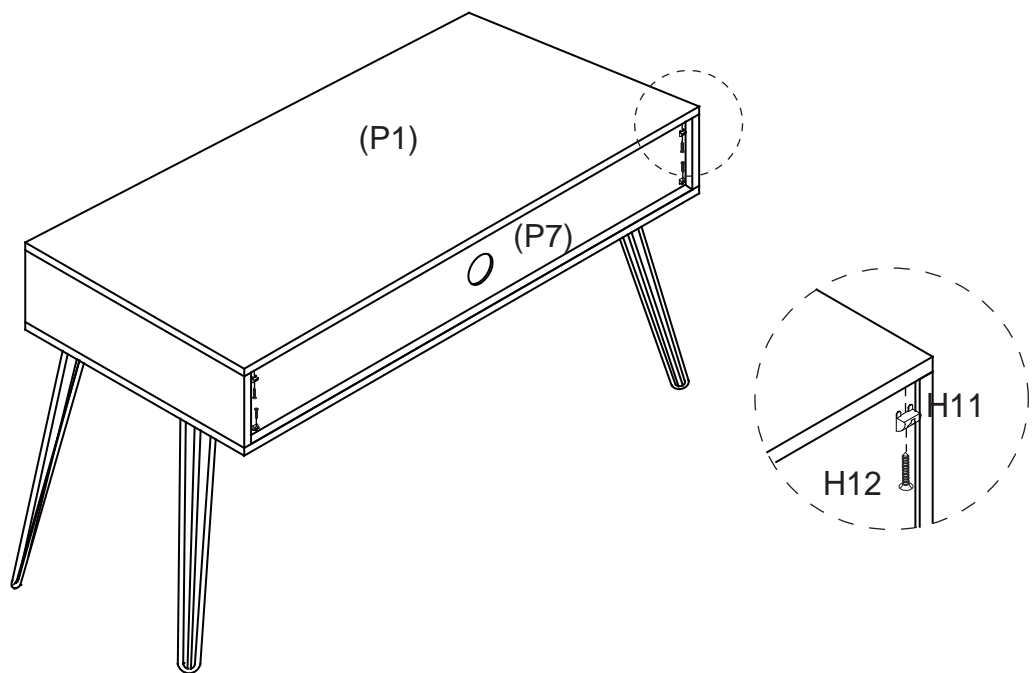

Secure Back Panel (P7) in place with 4 x wedges (H11) using 4 x screws (H12).

Step 14

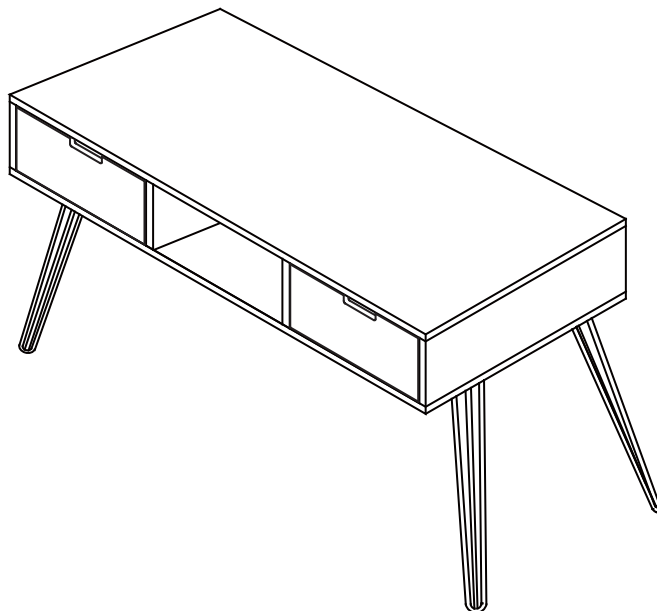

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.