




**Fantastic
Furniture**

Version 1.0

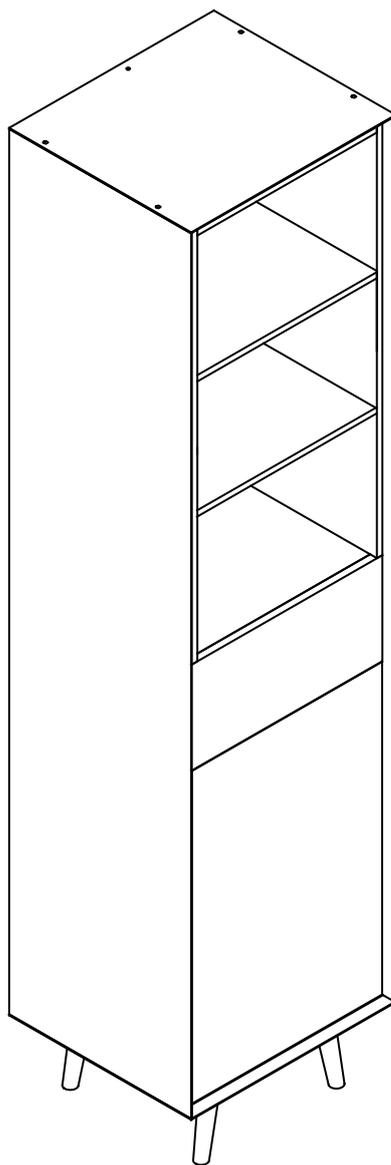

Two People



Required

STOCKHOLM

BOOKCASE LARGE NARROW

fantasticfurniture.com.au

Recommended weight capacity : 10kgs/shelf.



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home for your
chance to win a \$250 Fantastic Furniture Gift Card!

fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

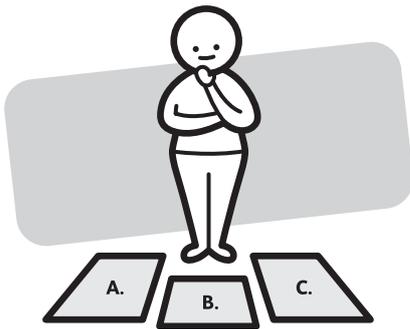

Identify and lay out all of the components before you begin assembly.

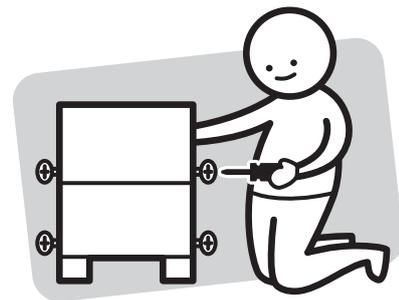

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product





DO NOT USE




Other tools you need:
Phillips head screwdriver;

Parts list

- Top Panel (P1);
- Left Side Panel (P2);
- Right Side Panel (P3);
- Bottom Panel (P4);
- Inner Top Panel (P5);
- 3 x Shelf Panels (P6);
- 2 x Inner Side Panels (P7);
- Rail (P8);
- 3 x Back Panels (P9);
- Shelf Panel (P10);
- Back Panel (P11);
- Door (P12);
- 4 x Legs (P13);
- Drawer Front (P14);
- Left Drawer Side (P15);
- Right Drawer Side (P16);
- Drawer Base (P17);
- Drawer Back (P18);

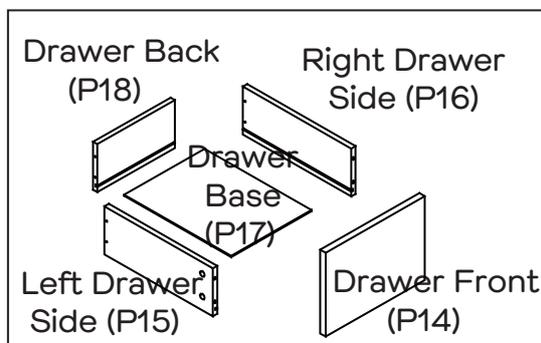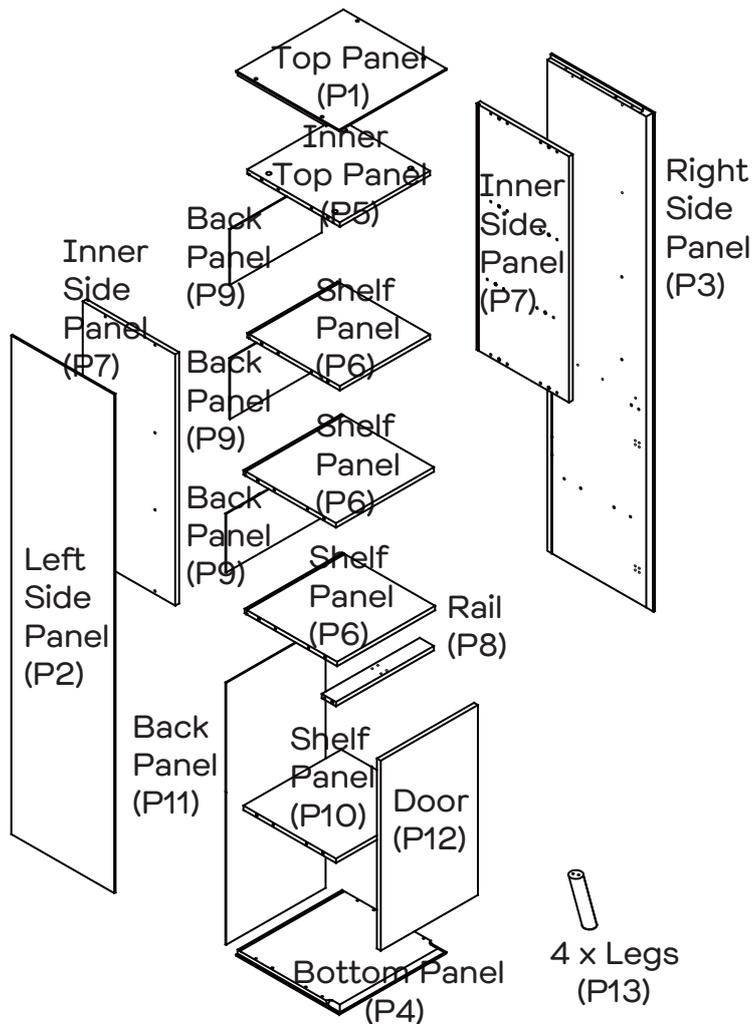


Hardware pack

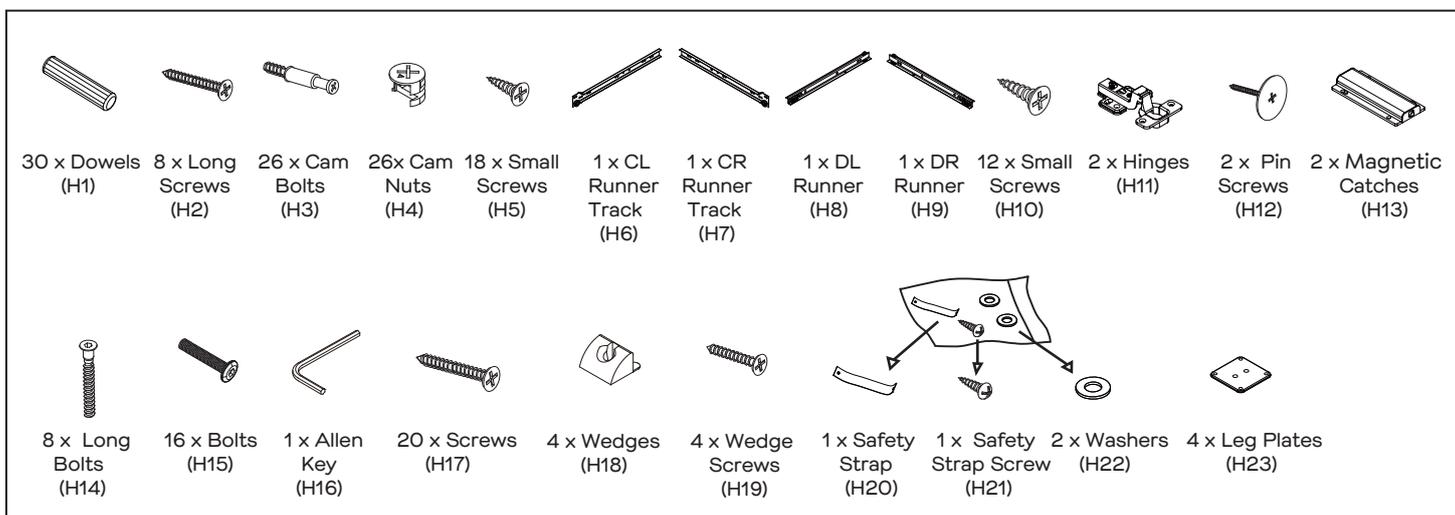

Step 1

You will need	
1 x CL Runner Track (H6)	1 x CR Runner Track (H7)
6 x Small Screws (H5)	16 x Screws (H17)
Phillips Head Screwdriver	

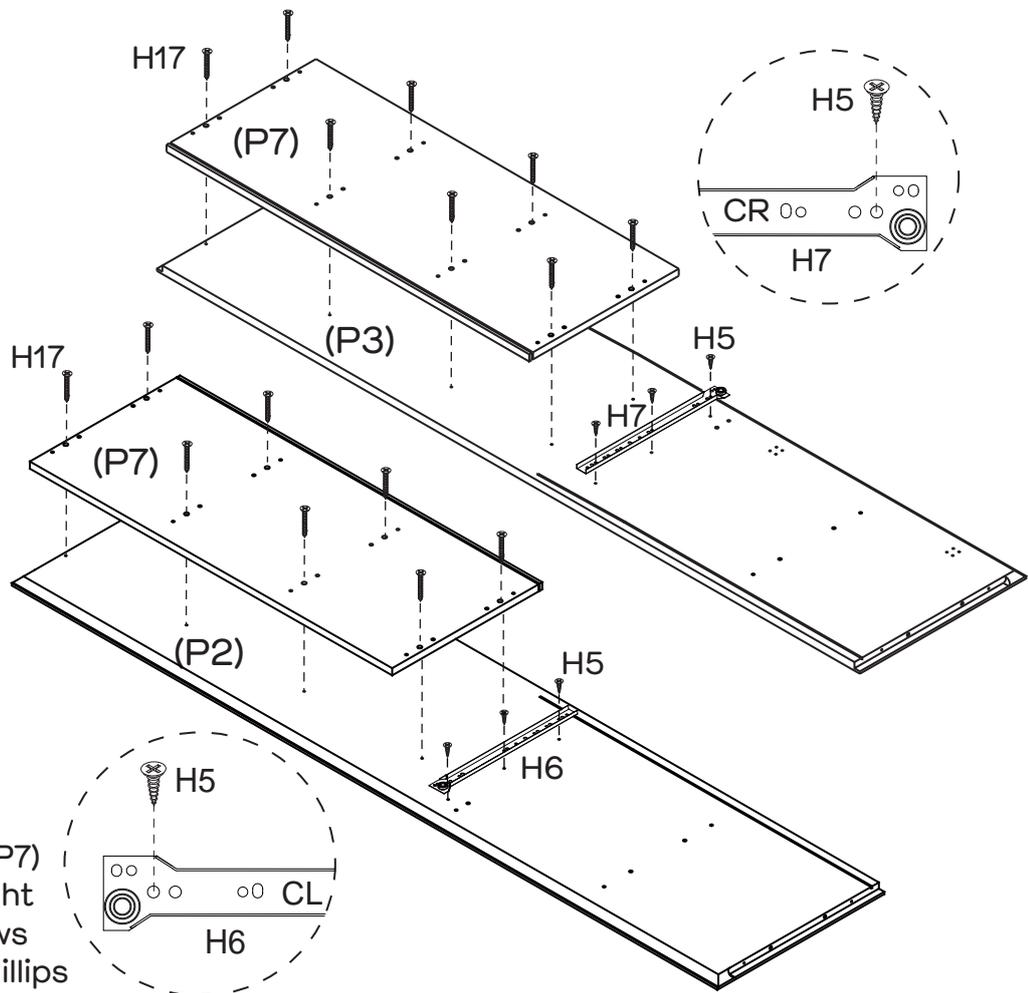


Attach 2 x Inner Side Panels (P7) to Left Side Panel (P2) and Right Side Panel (P3) with 16 x Screws (H17) by tightening with the Phillips Head Screwdriver. Attach 1 x CL Runner

Track (H6) to Left Side Panel (P2) and 1 x CR Runner Track (H7) to Right Side Panel (P3) with 6 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 2


You will need	
22 x Cam Bolts (H3)	11 x Dowels (H1)
Phillips Head Screwdriver	

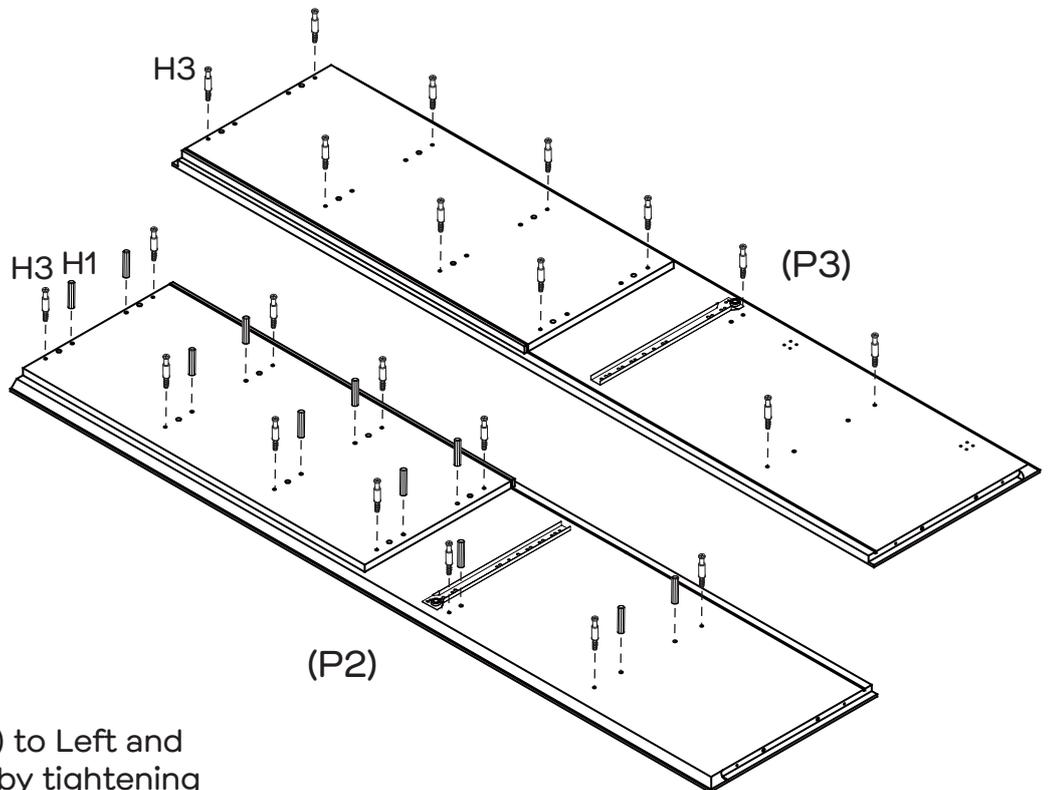


Secure 22 x Cam Bolts (H3) to Left and Right Side Panels (P2&P3) by tightening with the Phillips Head Screwdriver. Insert 11 x Dowels (H1) into Left Side Panel (P2) as shown.

Step 3

You will need	
2 x Magnetic Catches (H13)	8 x Small Screws (H5)
Phillips Head Screwdriver	

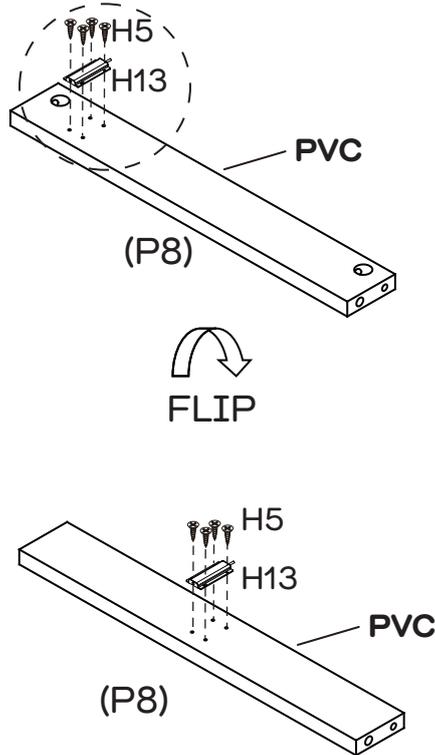

Please note the position of the head of the Catch before fixing.

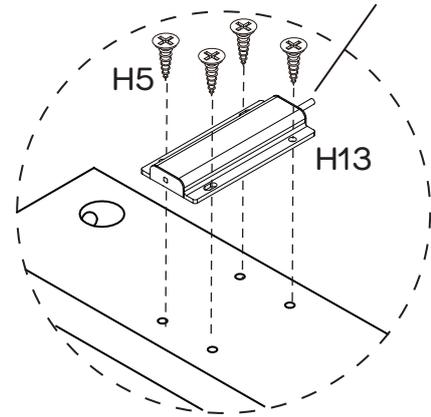

Attach 2 x Magnetic Catches (H13) to each side of Rail (P8) with 8 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


Step 4

You will need	
11 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.


Ensure the Top Panel (P5), Shelf Panels (P6x3) & Shelf Panel (P10) are aligned so that the grooves are all at the back as shown.

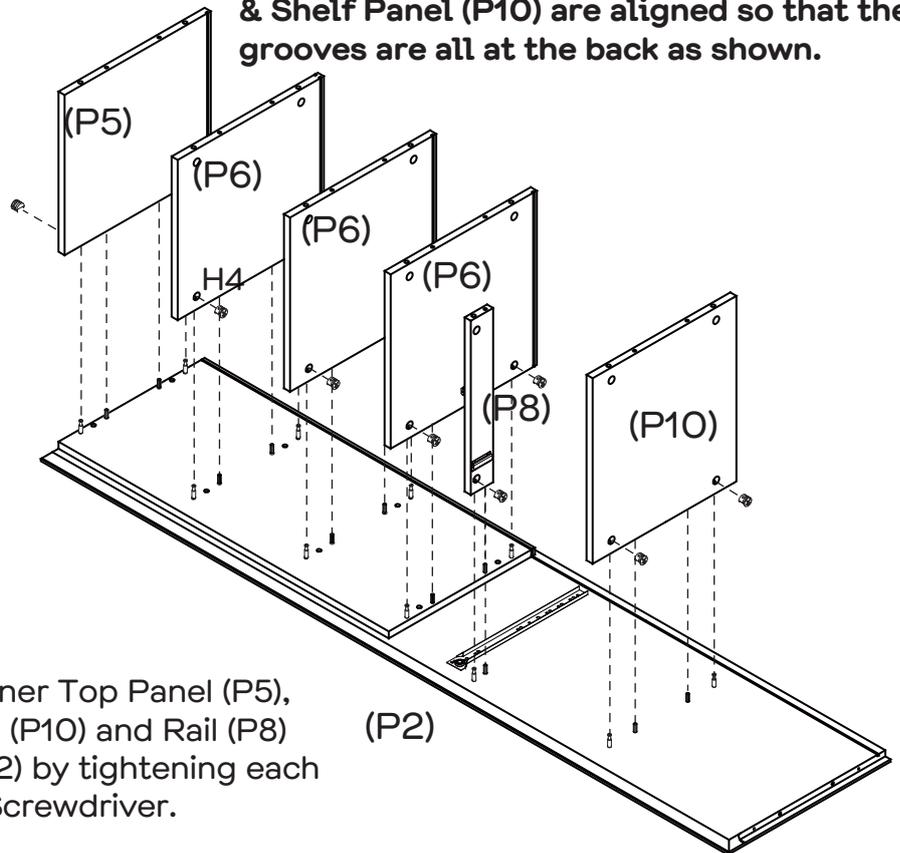

Insert 11 x Cam Nuts (H4) into Inner Top Panel (P5), 3 x Shelf Panels (P6), Shelf Panel (P10) and Rail (P8) and attach to Left Side Panel (P2) by tightening each Cam Nut with the Phillips Head Screwdriver.

Note: Before securing panels - ensure all Cam Nuts are on the bottom of each shelf panel except for the Inner Top Panel which should face upwards.

Step 5

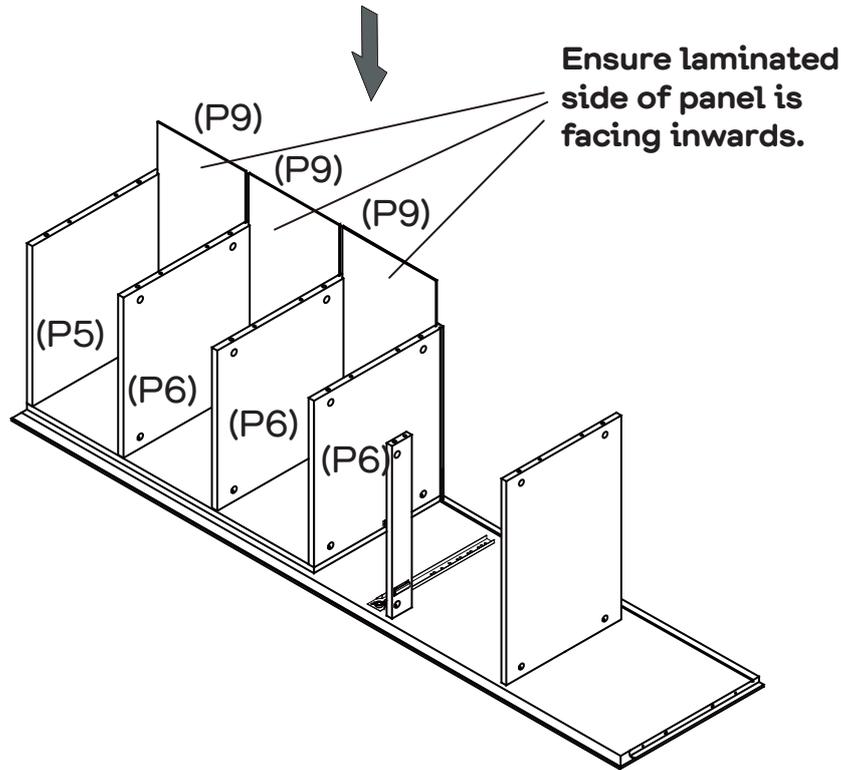


Slide 3 x Back Panels (P9) into the grooves of Inner Top & Shelf Panels (P5&P6x3).


Step 6

You will need	
11 x Dowels (H1)	11 x Cam Nuts (H4)
Phillips Head Screwdriver	

Two People

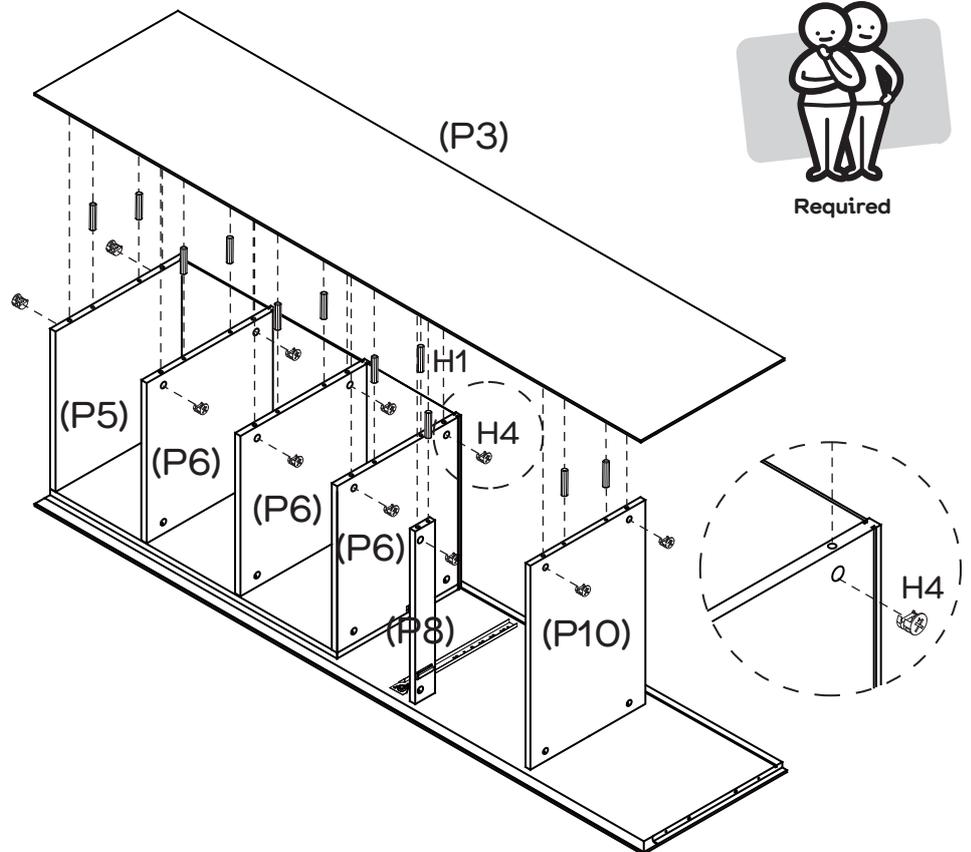


This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 11 x Dowels (H1) and 11 x Cam Nuts (H4) into Inner Top Panel (P5), 3 x Shelf Panels (P6), Shelf Panel (P10) and Rail (P8) and attach to Right Side Panel (P3) by tightening each Cam Nut with the Phillips Head Screwdriver.


Step 7


You will need	
	
4 x Long Screws (H2)	Phillips Head Screwdriver
	
4 x Dowels (H1)	

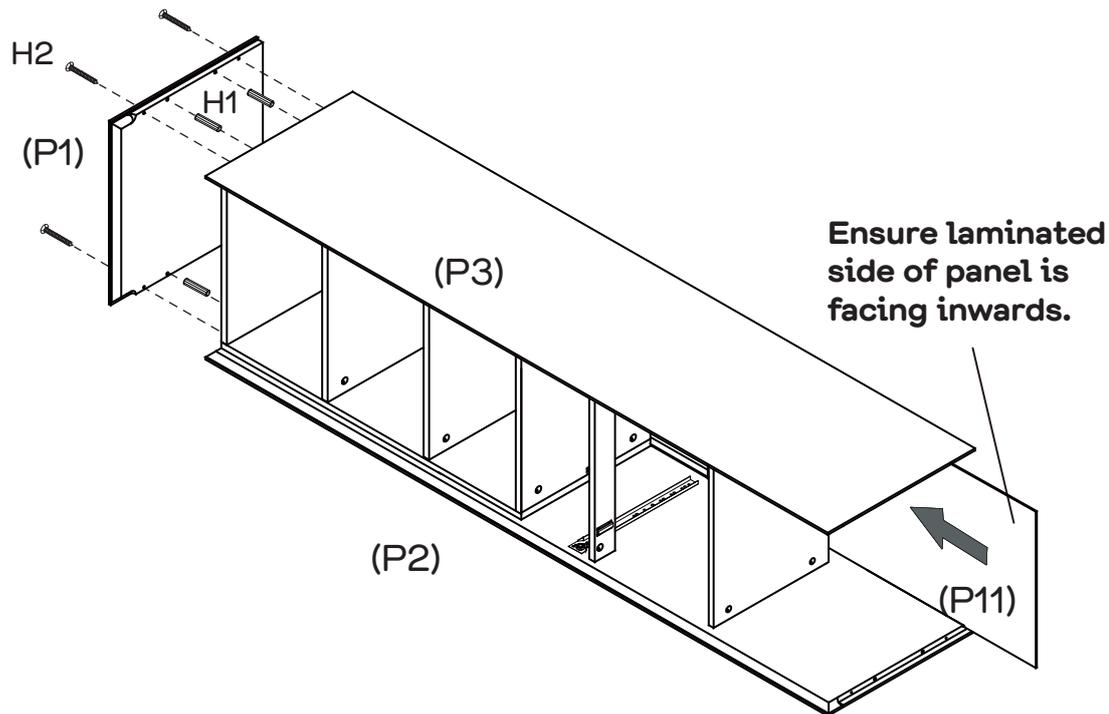

Insert 4 x Dowels (H1) into the top of Left & Right Side Panels (P2&P3) and secure Top Panel (P1) to the top of the unit with 4 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Slide Back Panel (P11) into the grooves of Left and Right Side Panels (P2&P3) at the bottom of the unit.

Step 8

You will need	
	
4 x Long Screws (H2)	Phillips Head Screwdriver
	
4 x Dowels (H1)	

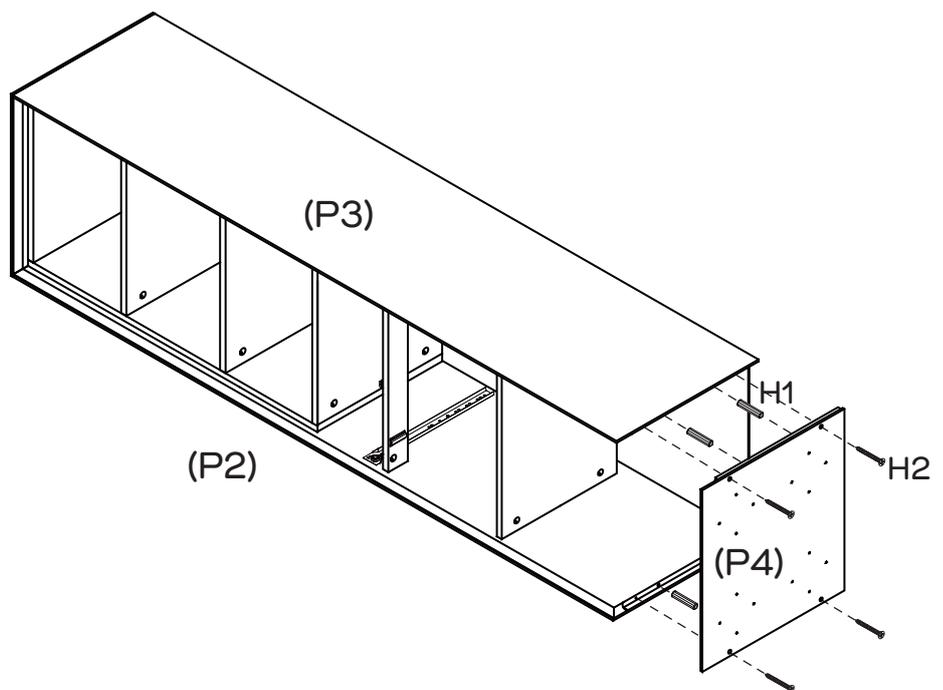


Insert 4 x Dowels (H1) into the bottom of Left & Right Side Panels (P2&P3) and secure Bottom Panel (P4) to the bottom of the unit with 4 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.

Step 9


You will need	
	
16 x Bolts (H15)	1 x Allen Key (H16)
	
4 x Leg Plates (H23)	Phillips Head Screwdriver
	
8 x Long Bolts (H14)	


Ensure the countersunk holes on the Leg Plate are face up, so that the Screws sit flush with the top of the Leg Plate once attached.

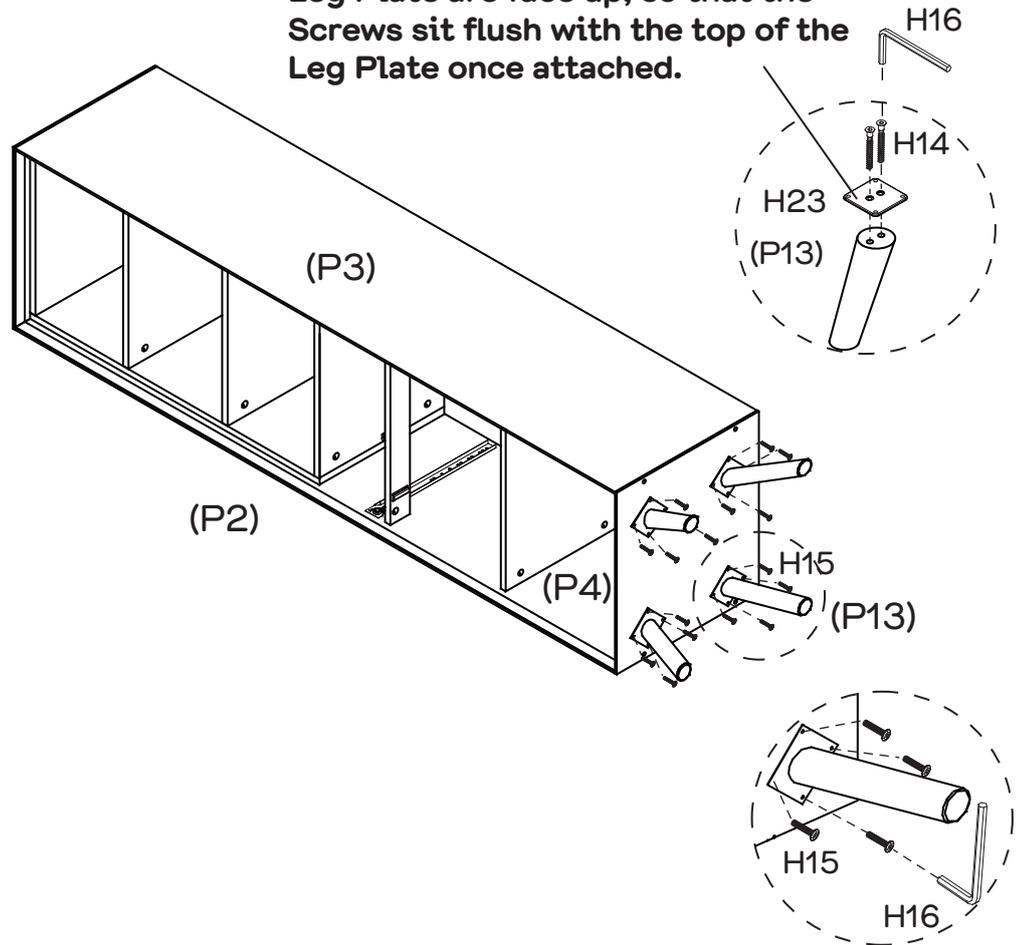

Secure 4 x Leg Plates (H23) to 4 x Legs (P13) with 8 x Long Bolts (H14) by tightening with the Allen Key (H16). Attach 4 x Legs (P13) to Bottom Panel (P4) with 16 x Bolts (H15) by tightening with the Allen Key (H16).

Step 10

You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver
	
1 x Pin Screw (H12)	

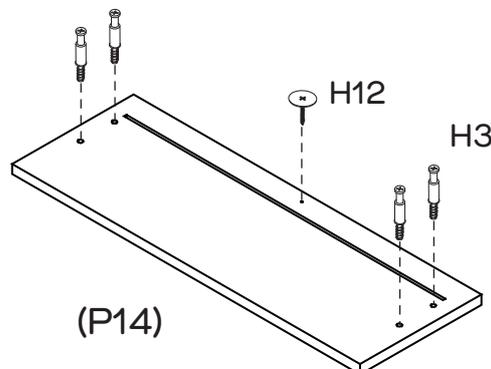


Attach 4 x Cam Bolts (H3) and 1 x Pin Screw (H12) to Drawer Front (P14) by tightening with the Phillips Head Screwdriver.


Step 11

You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

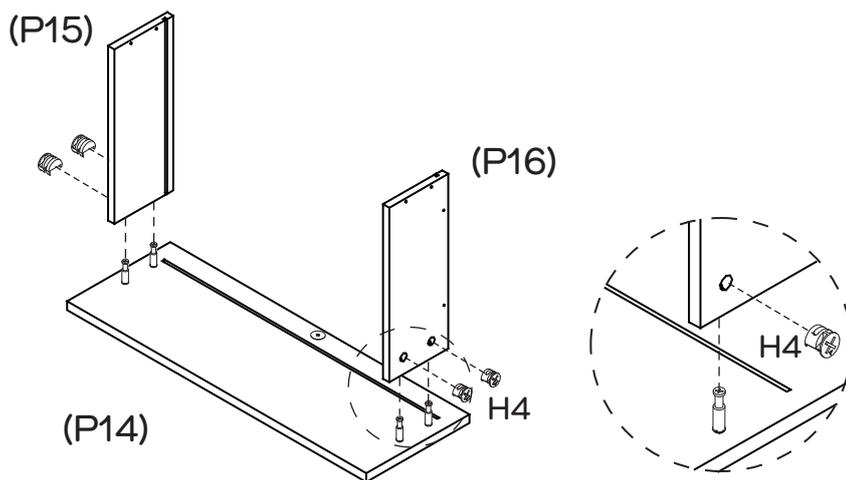

Insert 4 x Cam Nuts (H4) into Left & Right Drawer Sides (P15&P16) and attach to Drawer Front (P14) by tightening Cam Nuts with the Phillips Head Screwdriver.


Step 12

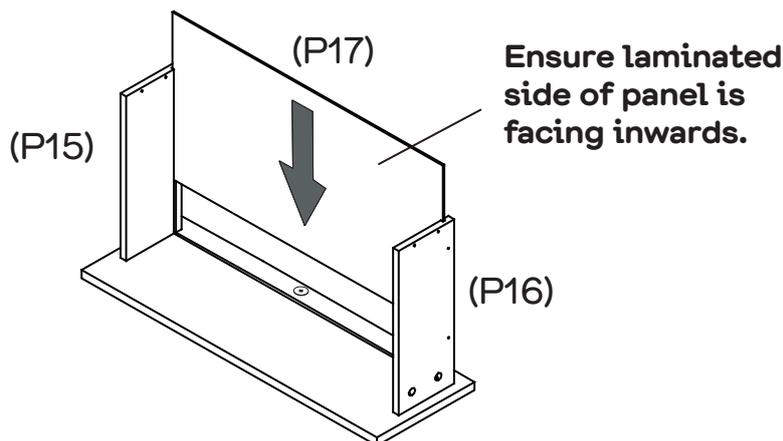

Slide the Drawer Base (P17) into the grooves of Left & Right Drawer Sides (P15&P16) as shown.

Step 13


You will need	
	
4 x Screws (H17)	Phillips Head Screwdriver

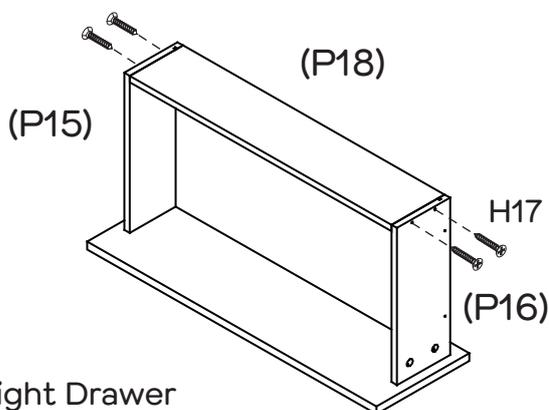

Attach Drawer Back (P18) to Left & Right Drawer Sides (P15&P16) with 4 x Screws (H17) by tightening with the Phillips Head Screwdriver. Before securing - Ensure the Bottom Panel lines up with the grooves the whole way around the drawer.

Step 14


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips Head Screwdriver

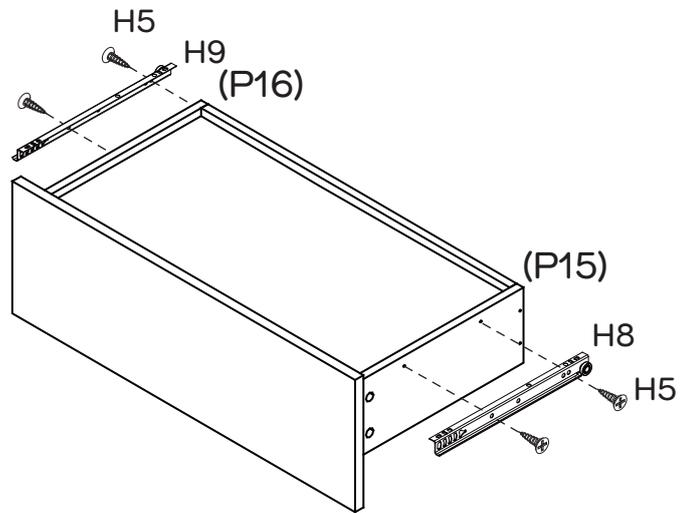

Attach 1 x DL Runner (H8) to Left Drawer Side (P15) and 1 x DR Runner (H9) to Right Drawer Side (P16) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 15


You will need	
2 x Hinges (H11)	4 x Small Screws (H10)
1 x Pin Screw (H12)	Phillips Head Screwdriver

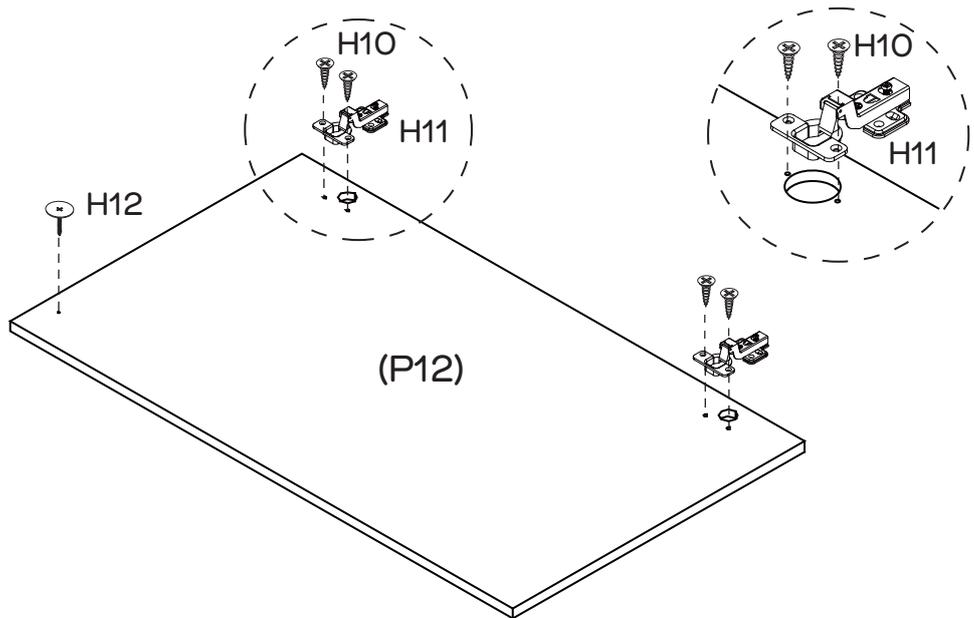


Attach 2 x Hinges (H11) and 1 x Pin Screw (H12) to Door (P12) with 4 x Small Screws (H10) by tightening with the Phillips Head Screwdriver.

Step 16

You will need	
	
8 x Small Screws (H10)	Phillips Head Screwdriver

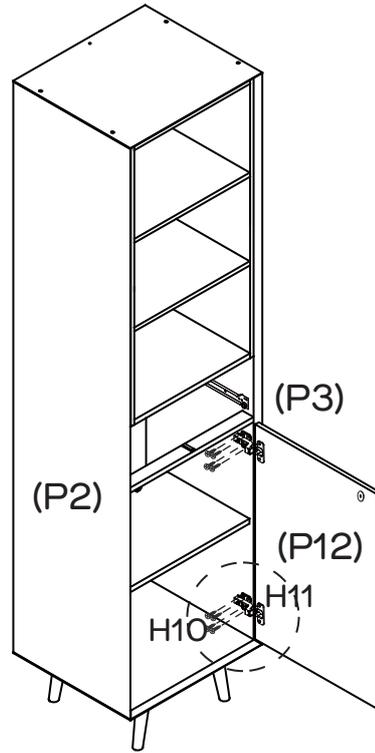


To open the door, firmly press the middle or top left of the door front to trigger the Catch to bounce the door open. If the door does not pop open when pressed or is not sitting flush with the front of the unit, reach under the Rail and adjust the head of the Catch by gently turning left or right to reach the right resistance.

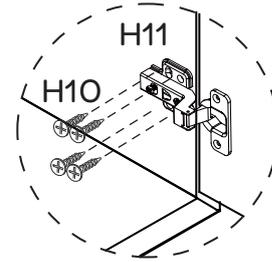


Attach the Door (P12) to the unit by securing 2 x Hinges (H11) to Right Side Panel (P3) with 8 x Small Screws (H10) by tightening with the Phillips Head Screwdriver.

Step 17

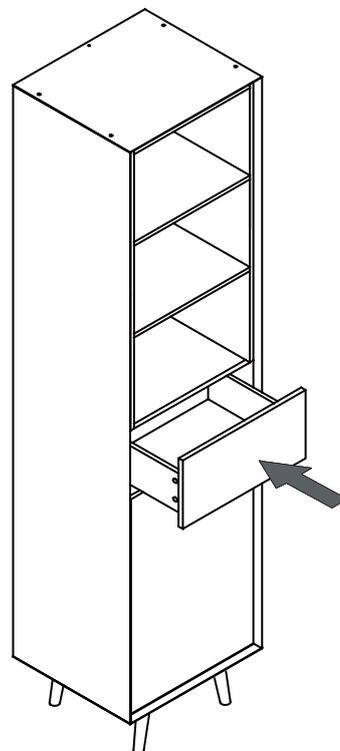




To open the drawer, firmly press the middle of the drawer front to trigger the Catch to bounce the drawer open. If the drawer does not pop open when pressed or is not sitting flush with the front of the unit, reach to the Rail and adjust the head of the Catch by gently turning left or right to reach the right resistance.

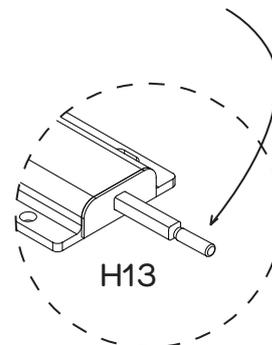

Insert the assembled drawer into the unit by gently guiding the drawer runners into place.

Step 18



You will need	
	
4 x Wedges (H18)	4 x Wedge Screws (H19)
	
1 x Safety Strap (H20)	1 x Safety Strap Screw (H21)
	
1 x Washer (H22)	Phillips Head Screwdriver

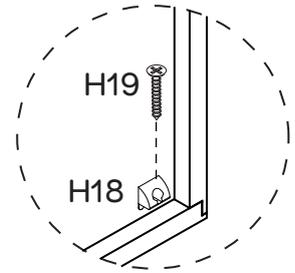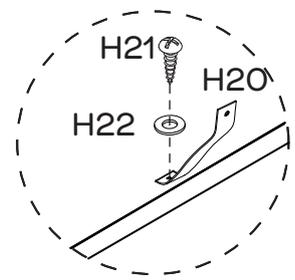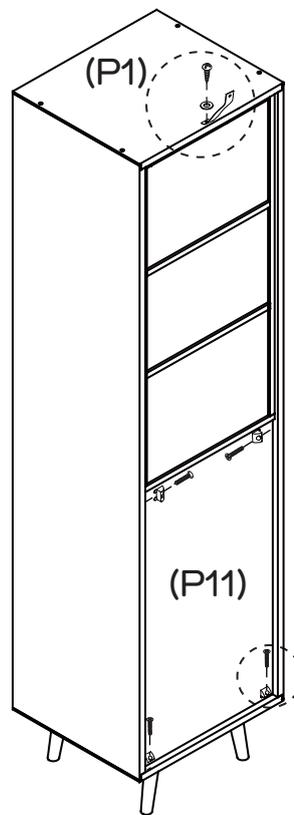

Attach 1 x Safety Strap (H20) to Top Panel (P1) with 1 x Safety Strap Screw (H21) and 1 x Washer (H22) by tightening with the Phillips Head Screwdriver. Secure Back Panel (P11) in place with 4 x Wedges (H18) using 4 x Wedge Screws (H19) by tightening with the Phillips Head Screwdriver.


Step 19

You will need	
	
1 x Washer (H22)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

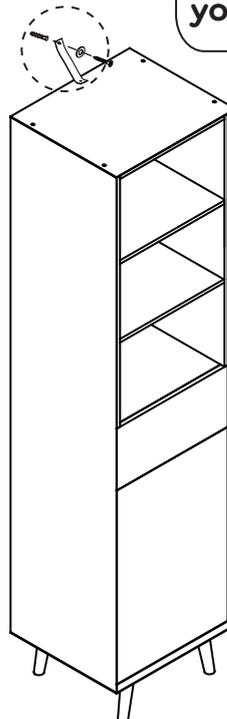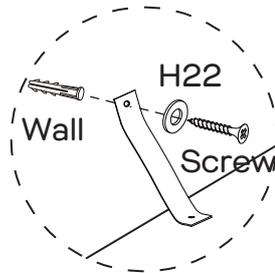

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Move the bookcase unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

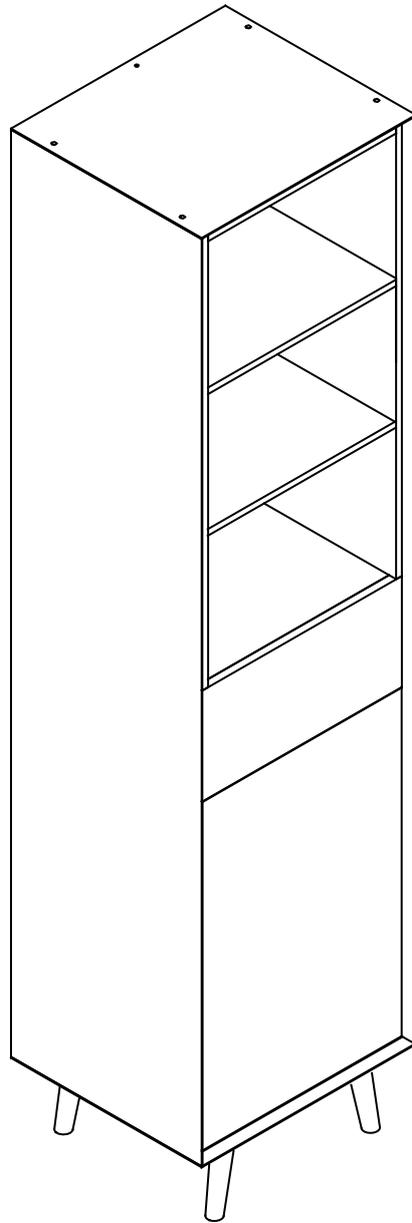


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.

TO ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN


STEP 1

Open the door.

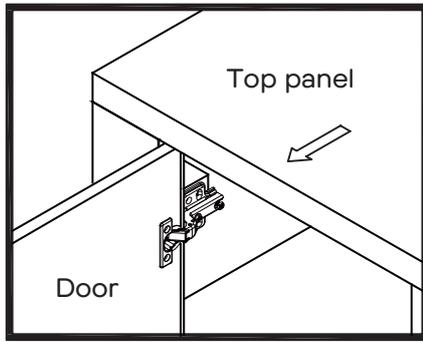


STEP 1

Adjust the door move in or out a little

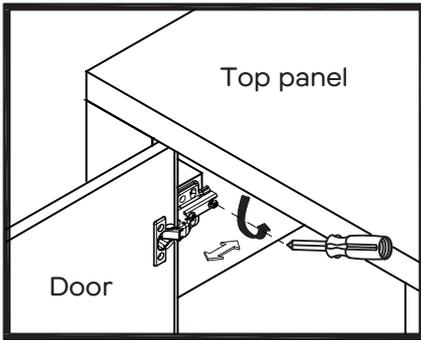


Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2B), then tighten screw.

STEP 2a MOVE DOOR IN

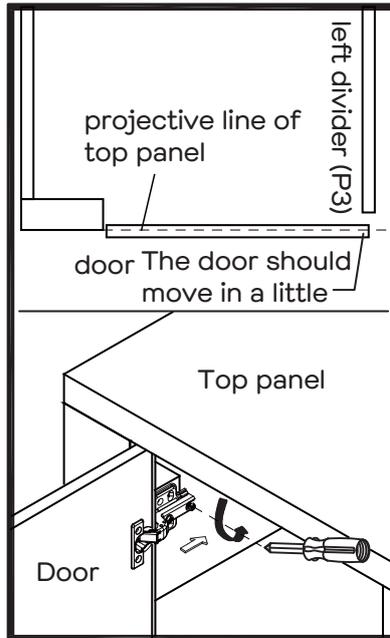

Push the hinge back a little.


STEP 2b MOVE DOOR OUT

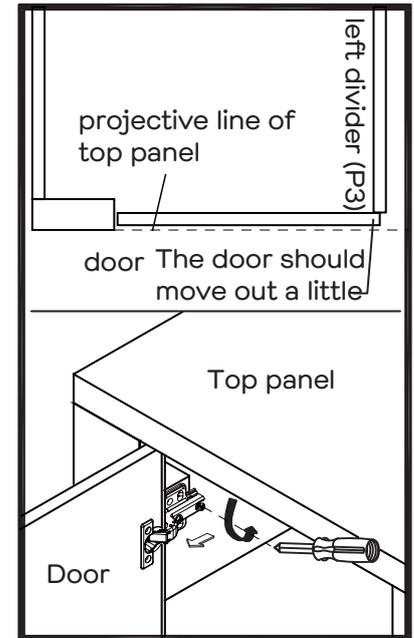

Pull the hinge forward a little.


STEP 3

To adjust the gap between door and leg

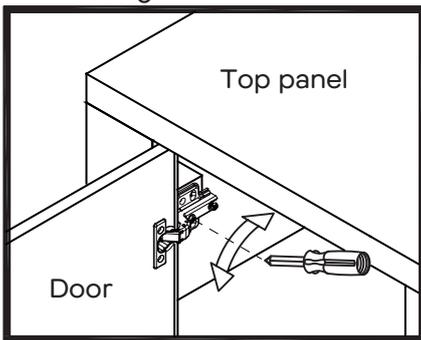


Loosen or tighten the screw indicated a little to adjust the gap between door and leg (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT

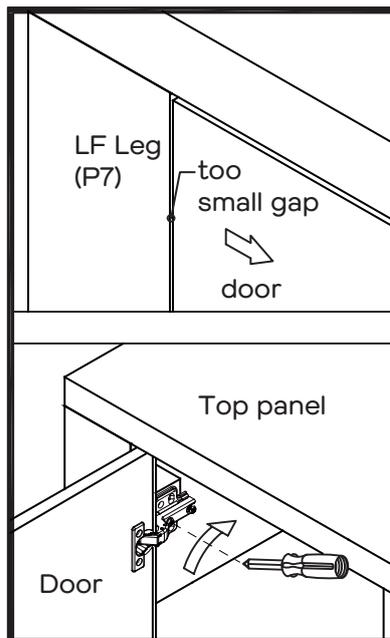

Turn the screw clockwise a little as shown to make the gap big.

STEP 3b MOVE DOOR LEFT

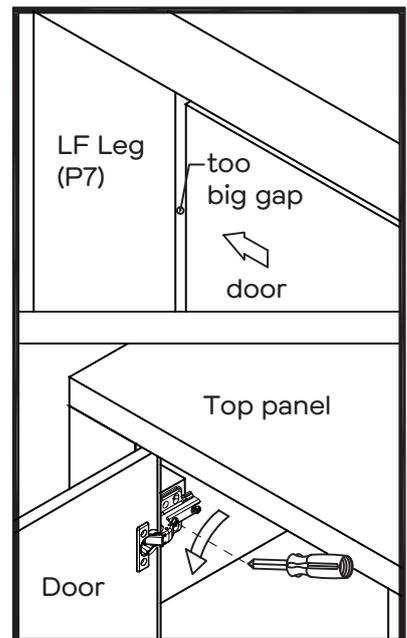

Turn the screw counterclockwise a little as shown to make the gap small.