


# Assembly Instructions

# ZARA


## Chair 1STR

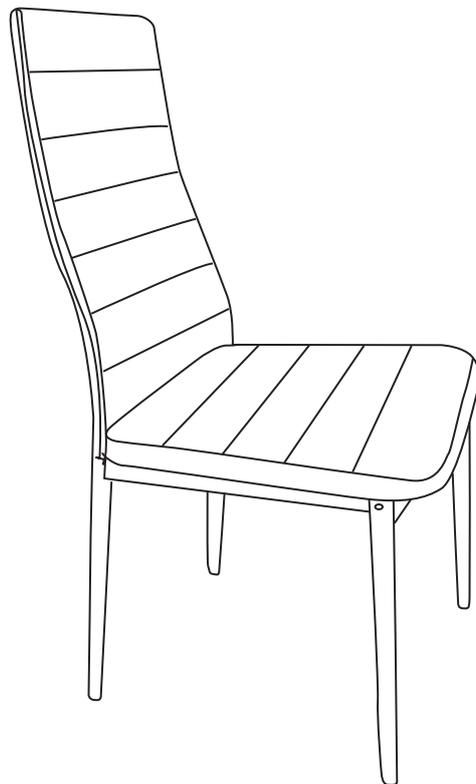

# WARNING


FAILURE TO FOLLOW THESE BASIC STEPS CAN LEAD TO DAMAGE THAT IS NOT COVERED BY YOUR WARRANTY

1

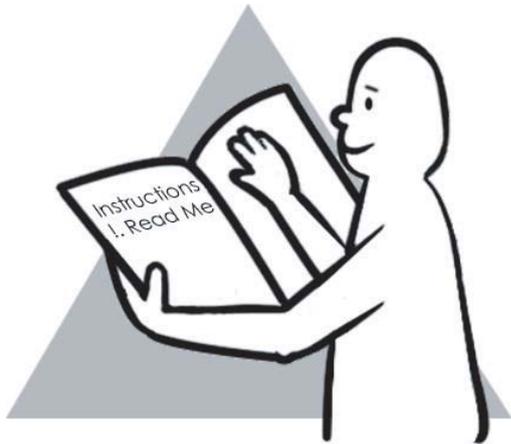


Read Instructions carefully. Check no parts are missing.

2

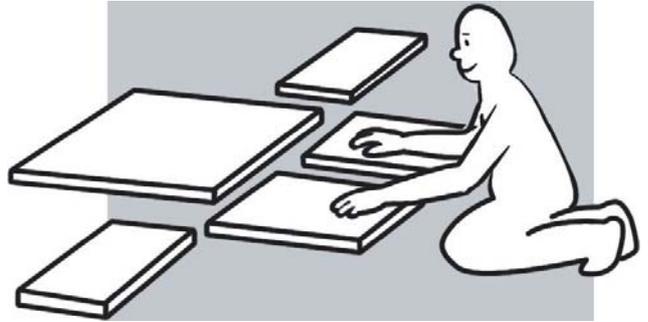


Lay out all of the components on a soft surface as if you were preparing to do a jigsaw puzzle.

3

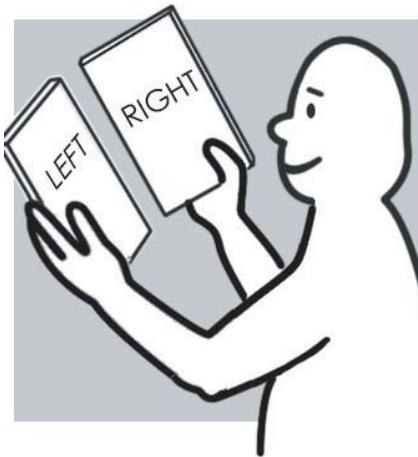


Carefully identify each component, especially those that are similar. The most common mistake is getting things back to front.

4

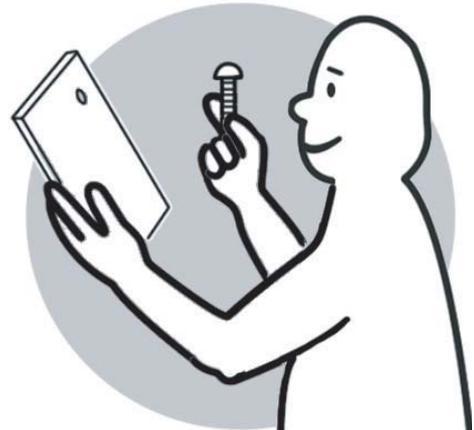


Separate and identify each component from the hardware pack and rest each one in its proper location before fastening.

5

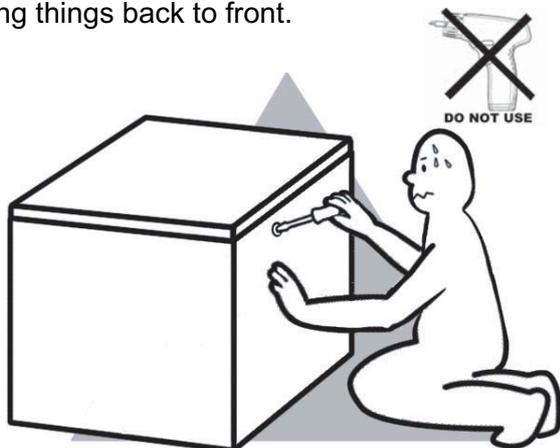

**DO NOT** fully tighten screws (leave slightly loose). When the item is fully assembled tighten the screws - but do not over tighten.

6

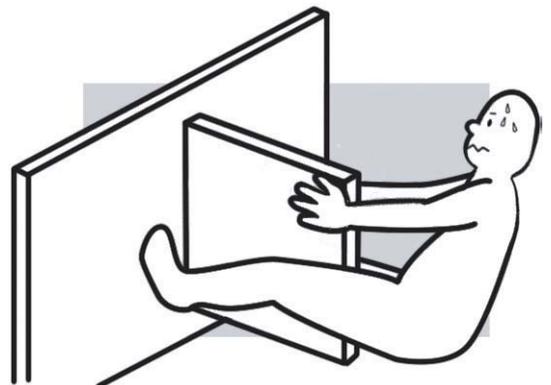


**DO NOT** set glue until you are certain that the parts belong together.

# What you Need

## To Assemble the Body





Phillips Head Screwdriver  
(not provided)



1x Allen Key



**DO NOT USE**

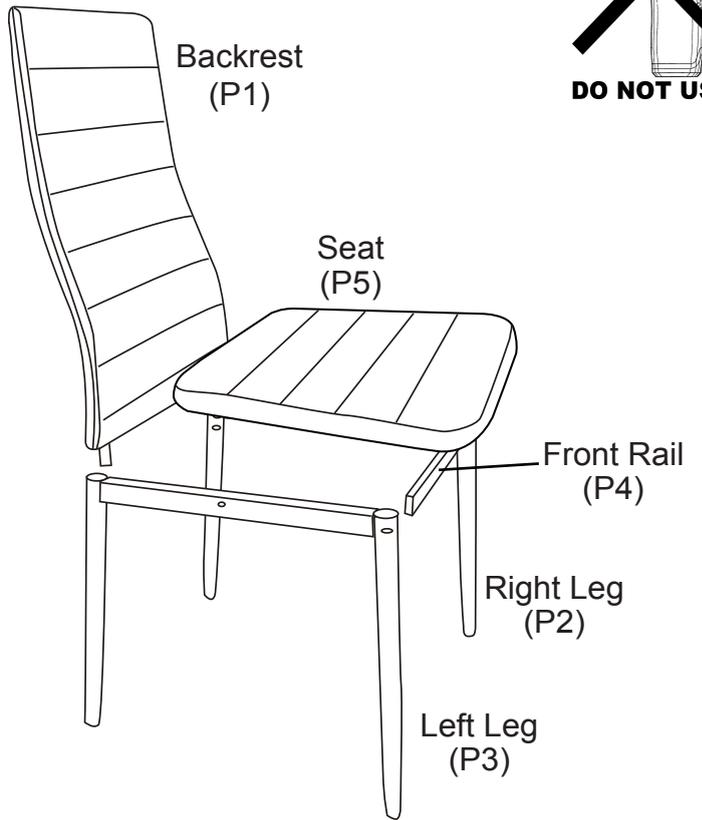
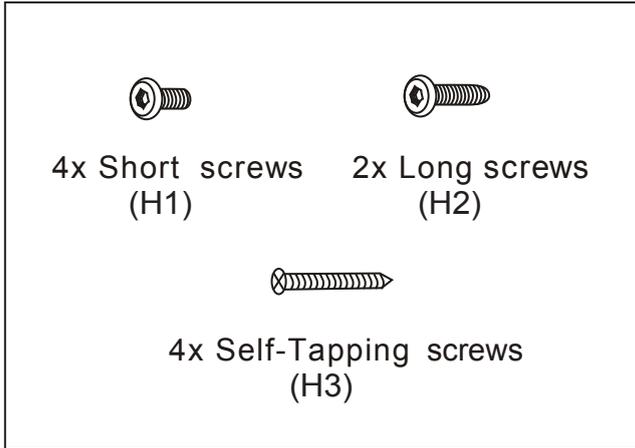


Please make sure you have all these parts before you start.

## Step 1

You will need:



4 x Short screws (H1)

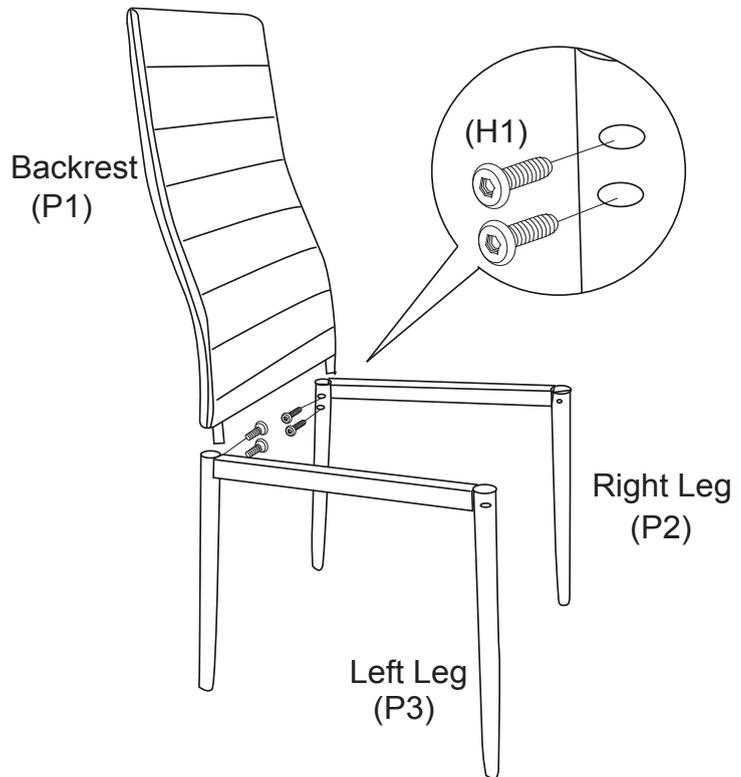


Attach Backrest (P1) to Right Leg (P2) and Left Leg (P3) with 4x Short Screws (H1) using allen key provided. Do not tighten.

# Step 2

You will need:	
2x Long screws (H2)	

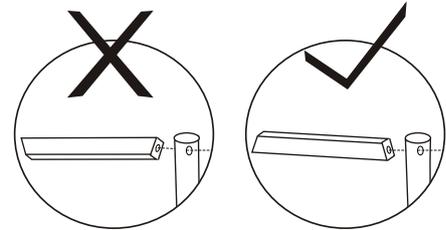



note: The Front Rail (P4) must be positioned as shown

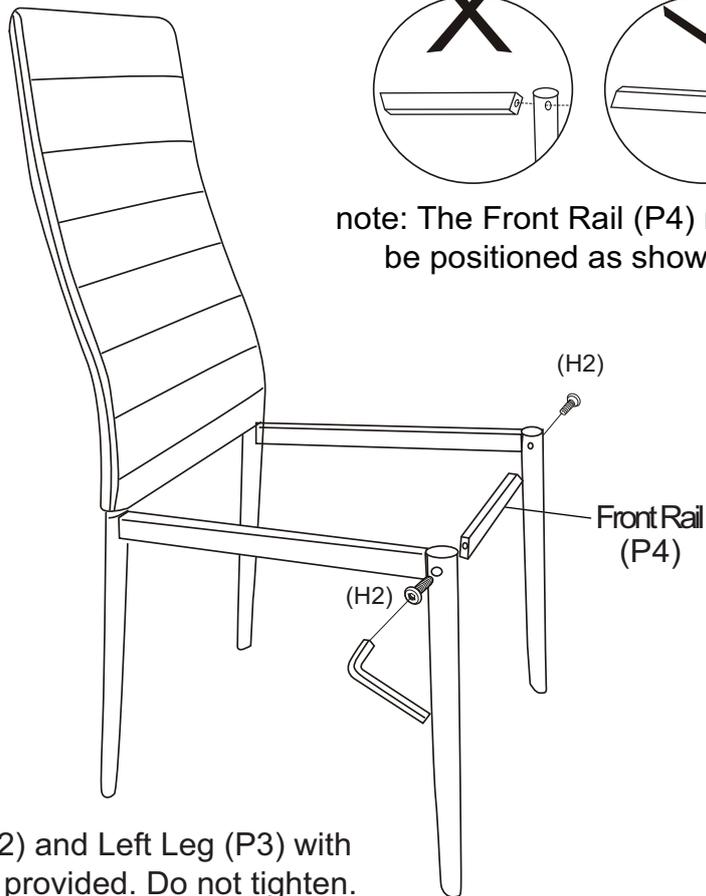

Attach Front Rail (P4) to Right Leg (P2) and Left Leg (P3) with 2 x Long Screws (H2) using allen key provided. Do not tighten.



# Step 3

You will need:	
4 x Self-Tapping screws (H3)	

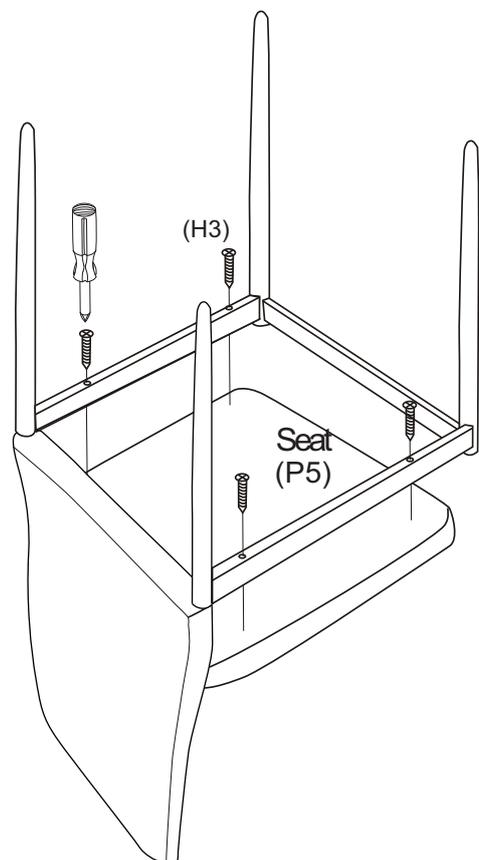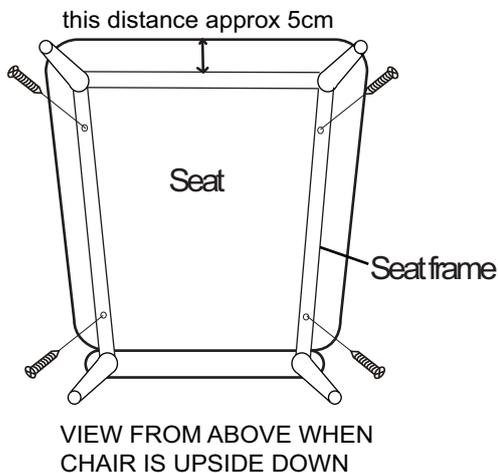


Attach Seat (P5) with 4 x Self-tapping Screws (H3) using Phillips head screwdriver. Carefully position seat as shown. Note: there are no pre-drilled holes in the seat.

# Step 4

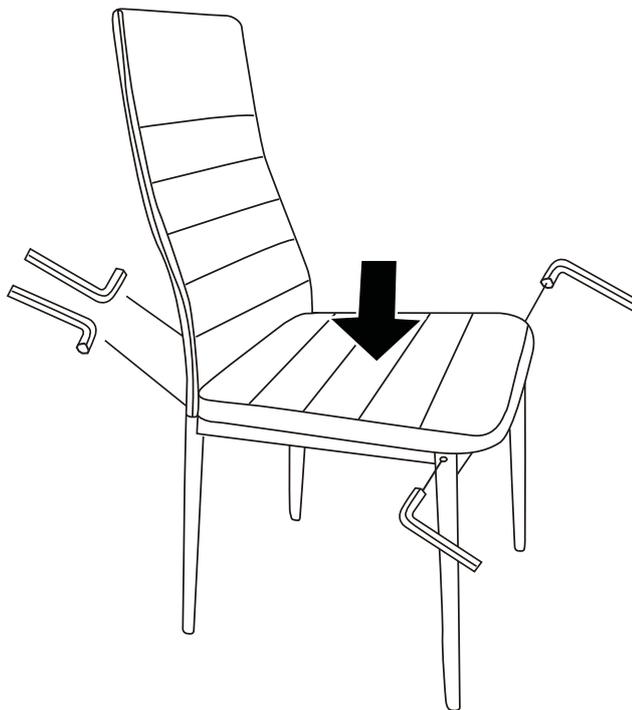

Apply downward pressure on the seat pad to ensure chair is level whilst tightening bolts.  
Tighten firmly with Allen key provided.

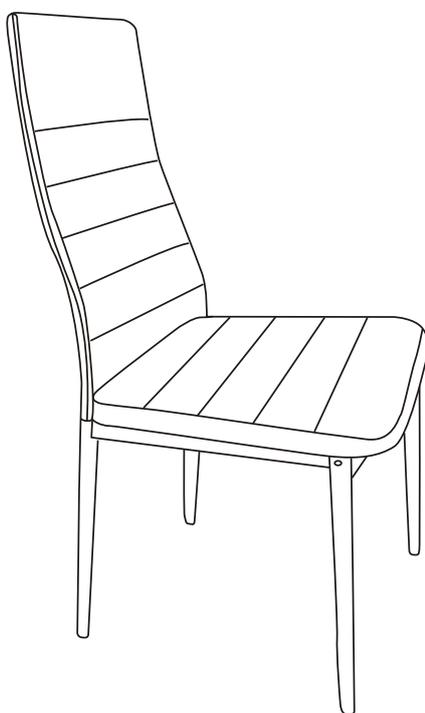

**The job is now complete!**  
In the interest of our environment please  
dispose of all packaging thoughtfully.