




**Fantastic
Furniture**

Version 1.0

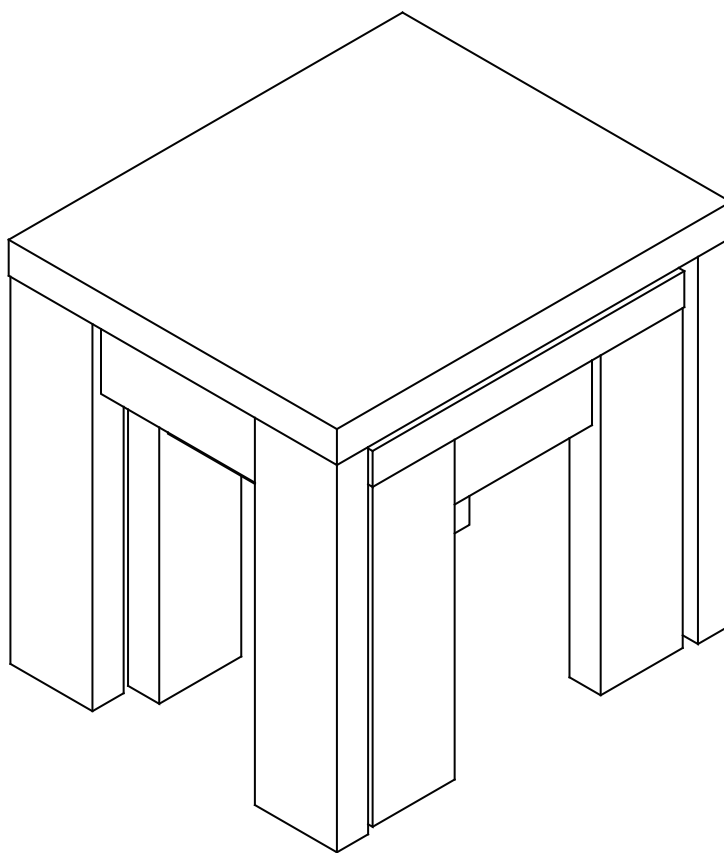

Havana

Table Nest Rectangle

fantasticfurniture.com.au

Recommended weight capacity : 80kg.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

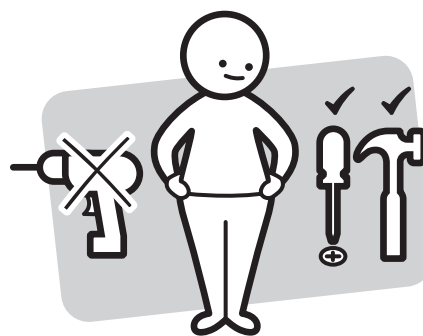

Make sure you have all the required tools. Never use power tools unless instructed.

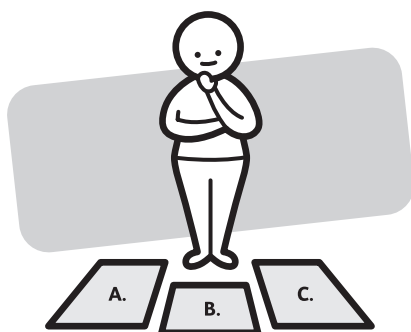

Identify and lay out all of the components before you begin assembly.

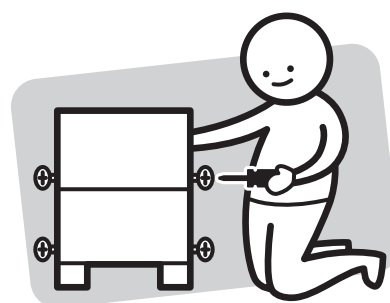

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need:

Phillips Head Screwdriver;
Hammer

Parts list


Top Panel (P1);
LF Leg (P2);
RF Leg (P3);
RF Leg (P4);
RR Leg (P5);
Long Apron (P6);
2 x Short Apron (P7);
Top Panel (P8);
LF Leg (P9);
RF Leg (P10);
RF Leg (P11);
RR Leg (P12);
2 x Long Apron (P13);
Short Apron (P14)

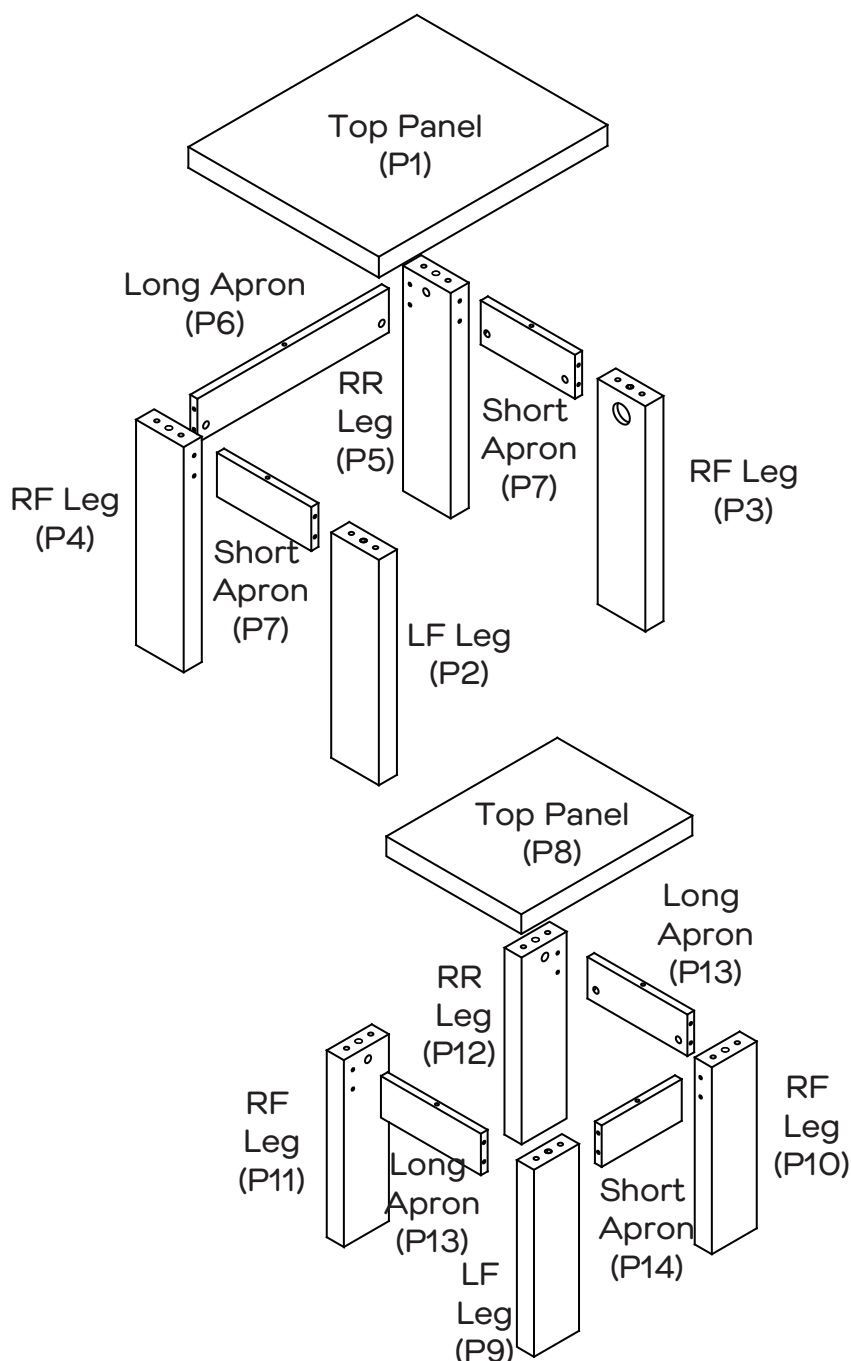

Hardware pack




16 x Dowels
(H1)



18 x Cam Bolts
(H2)



18 x Cam Nuts
(H3)



2 x Long Bolts
(H4)



2 x Half Round
Nuts
(H5)



2 x Hexagonal
Nuts
(H6)



1 x Spanner
(H7)



12 x Small Dowels
(H8)



6 x Screws
(H9)













2 x Glues
(H10)



8 x Plastic Glides
(H11)




Step 1

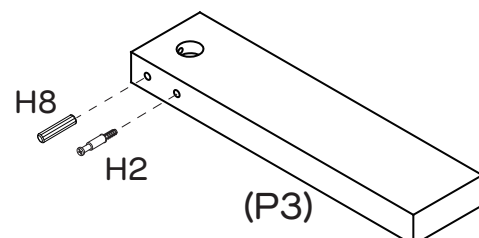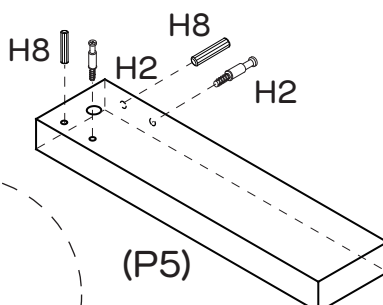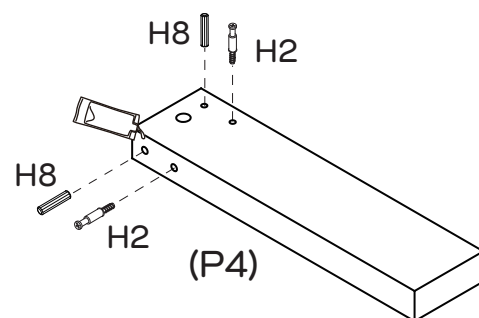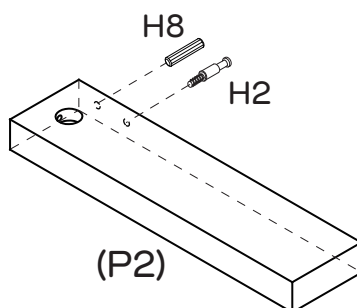You will need	
	
6 x Small Dowels (H8)	6 x Cam Bolts (H2)
	
1 x Glue (H10)	Phillips Head Screwdriver







Squeeze Glue (H10) into dowel holes in Legs (P2, P3, P4, P5) and insert 6 x Small Dowels (H8). Screw 6 x Cam Bolts (H2) into place using a phillips head screwdriver.


Step 2

You will need	
	
4 x Cam Nuts (H3)	1 x Glue (H10)
	
Phillips Head Screwdriver	

Make sure the side with the bigger holes of the Short Aprons (P7) is facing to the bottom of Legs.

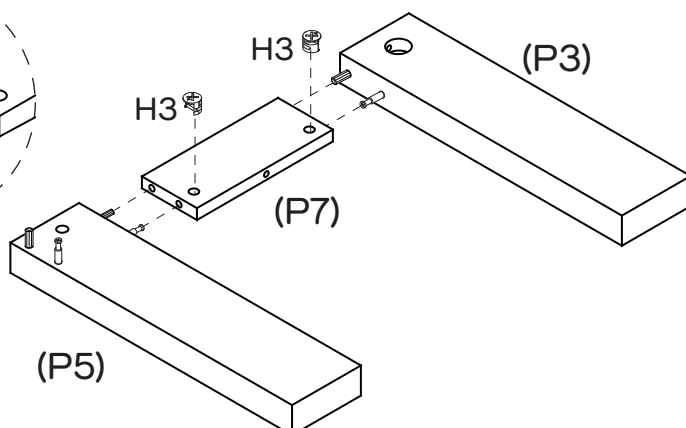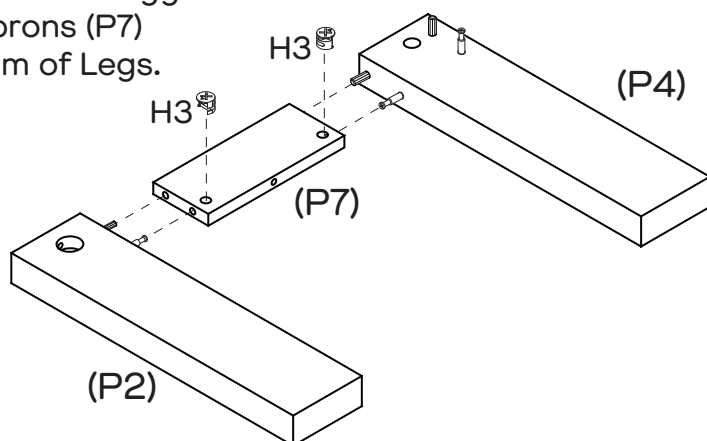






This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Squeeze Glue (H10) into dowel holes in short aprons (P7). Insert 4 x cam nuts (H4) into the holes of short aprons (P7) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach legs (P2,P4) and legs (P3, P5) to short aprons (P7), then tighten the cam nuts using a Phillips head screwdriver.

Step 3






You will need	
	
2 x Cam Nuts (H3)	1 x Glue (H10)
	
4 x Plastic Glides (H11)	Phillips Head Screwdriver
	
Hammer	

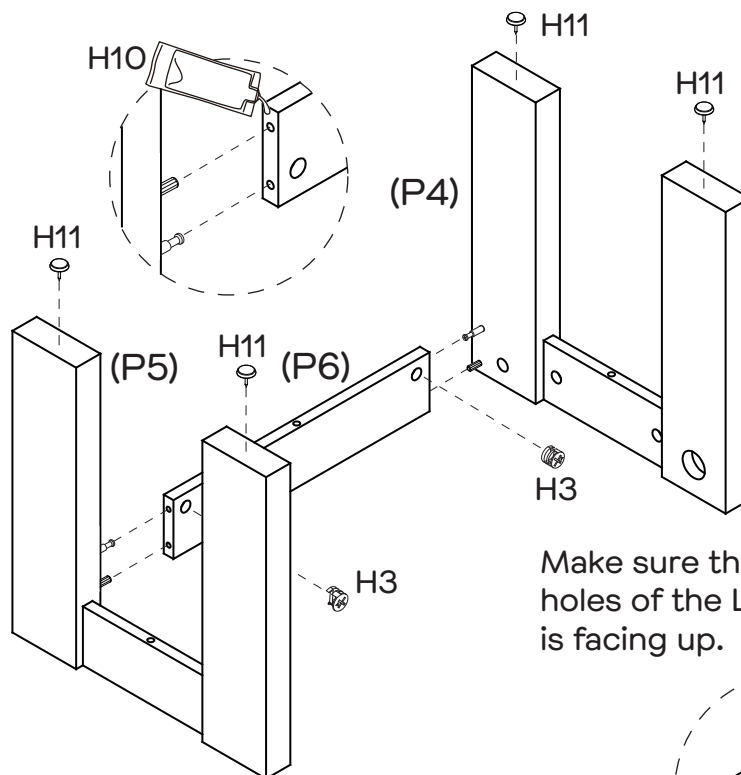


Make sure the side with the bigger holes of the Long Apron (P6) is facing up.

Squeeze Glue (H10) into dowel holes in long apron (P6). Insert 2 x cam nuts (H3) into the holes of long apron (P6). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach long apron (P6) to legs (P4, P5), then tighten the cam nuts using a Phillips head screwdriver. Hammer 4 x plastic glides (H11) into end of each leg.





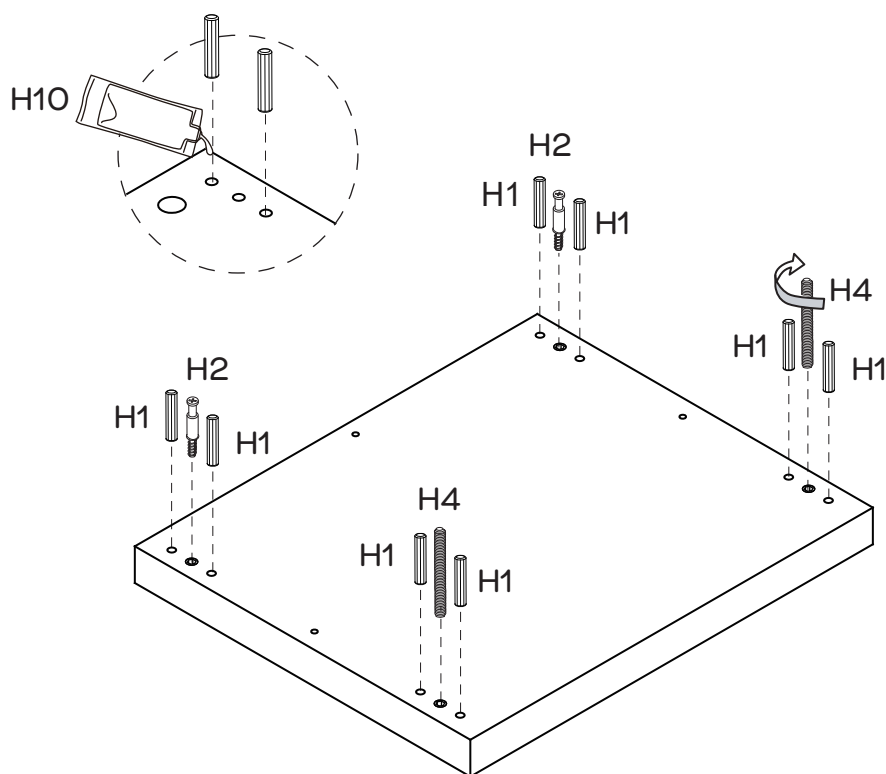


Step 4


You will need	
	
8 x Dowels (H1)	2 x Cam Bolts (H2)
	
2 x Long Bolts (H4)	1 x Glue (H10)
	
Phillips head screwdriver	



Squeeze Glue (H10) into dowel holes in top panel (P1) and insert 8 x dowels (H1). Screw 2 x cam bolts (H2) into top panel (P1) with a phillips head screwdriver. Insert 2 x long bolts (H4) into place as shown.





Step 5

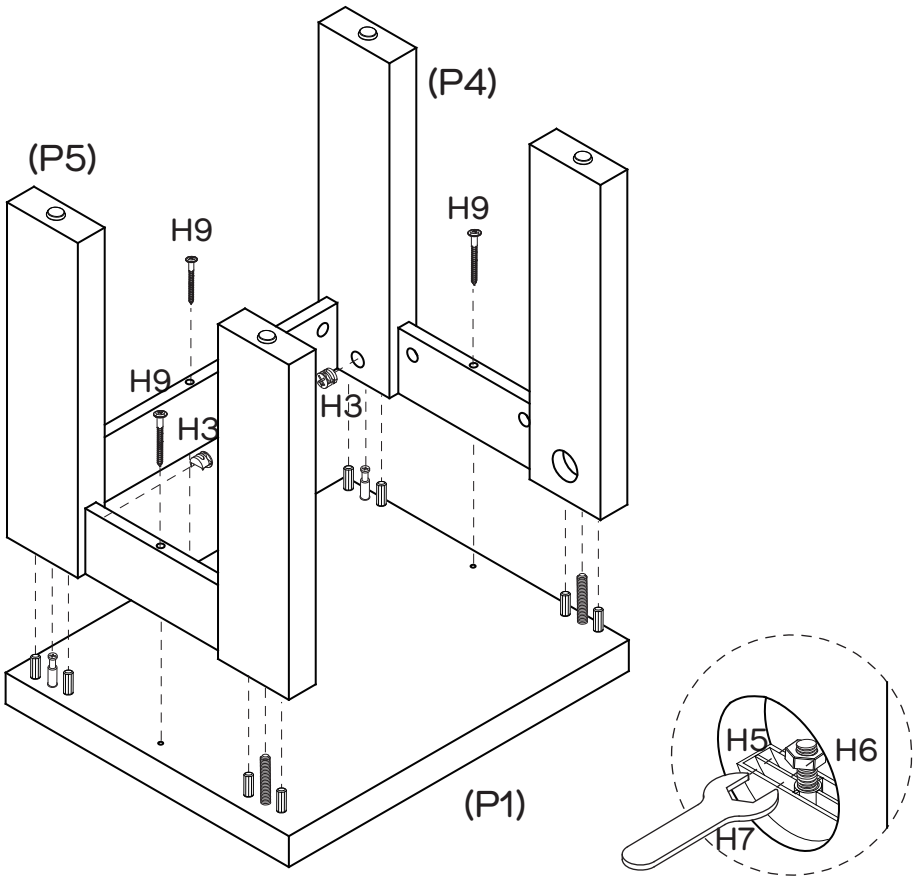
You will need	
	
2 x Cam Nuts (H3)	2 x Half Round Nuts (H5)
	
2 x Hexagonal Nuts (H6)	3 x Screws (H9)
	
1 x Glue (H10)	1 x Spanner (H7)
	
Phillips head screwdriver	



Squeeze Glue (H10) into dowel holes in top panel (P1). Insert 2 x cam nuts (H3) into the holes of legs (P4, P5). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach table leg frame to top panel (P1) with 2 x half round nuts (H5) and 2 x hexagonal nuts (H6) using spanner (H7). Tighten the cam nuts using a Phillips head screwdriver. Attach table leg frame to top panel (P1) with 3 x screws using a Phillips head screwdriver.




Step 6

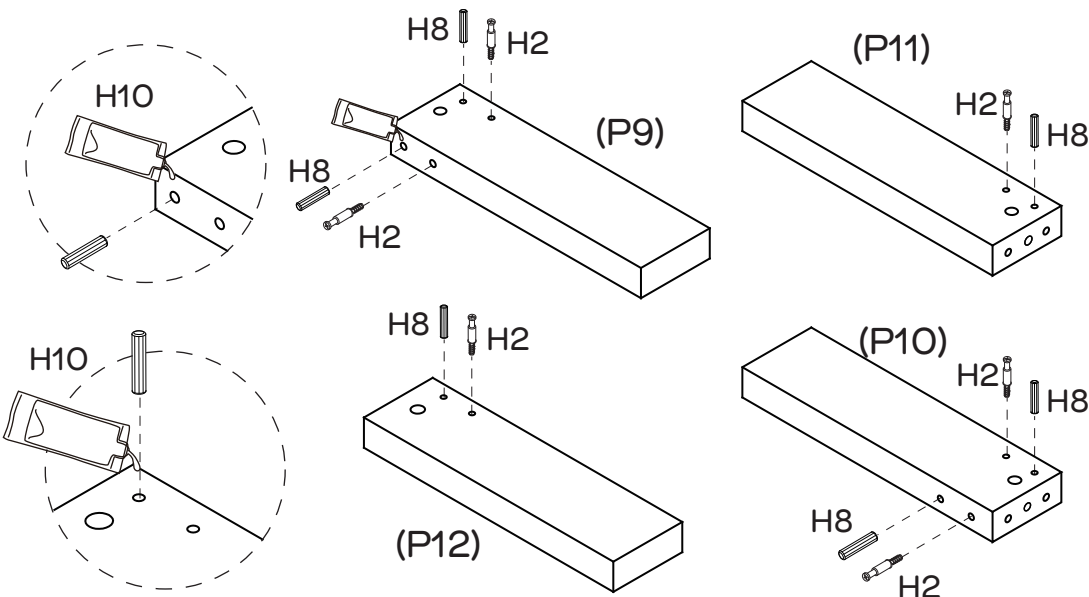You will need	
	
6 x Small Dowels (H8)	6 x Cam Bolts (H2)
	
1 x Glue (H10)	Phillips head screwdriver




Squeeze Glue (H10) into dowel holes in Legs (P9,P10, P11, P12) and insert 6 x small dowels (H8). screw 6 x cam bolts (H2) into place using a Phillips head screwdriver.

Step 7


You will need	
	
4 x Cam Nuts (H3)	1 x Glue (H10)
	
Phillips Head Screwdriver	

This is how a cam nut works.....





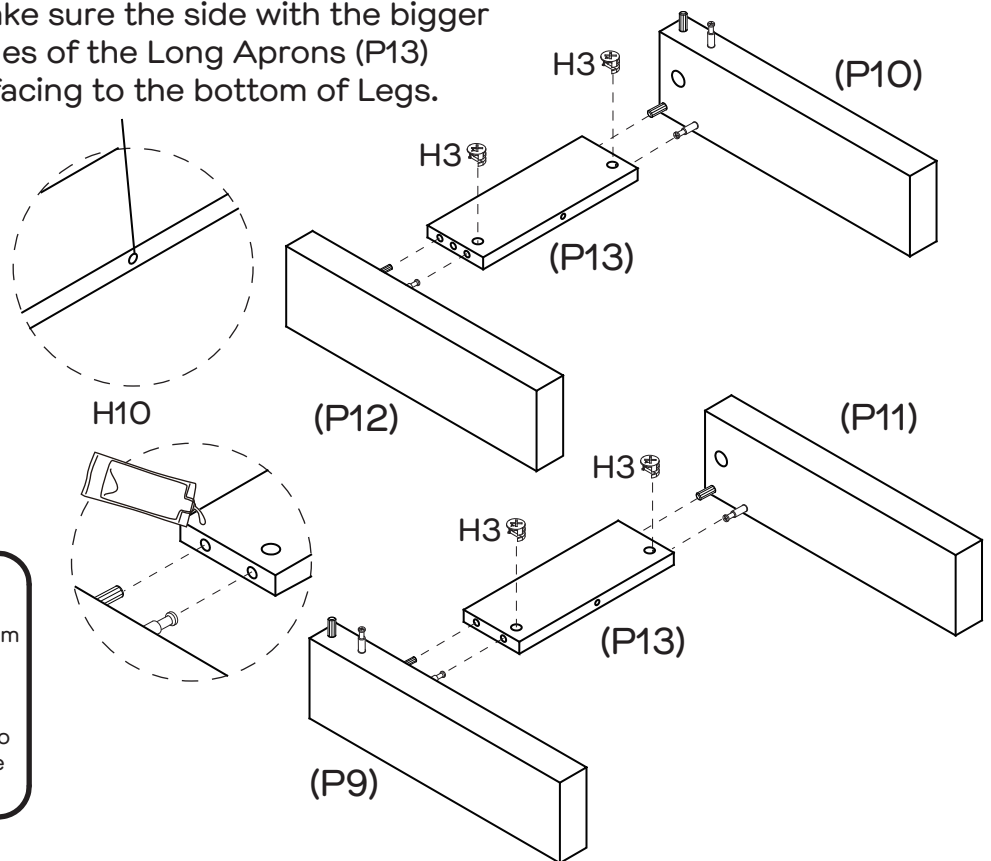


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Make sure the side with the bigger holes of the Long Aprons (P13) is facing to the bottom of Legs.




Squeeze Glue (H10) into dowel holes in long aprons (P13). Insert 4 x cam nuts (H3) into the holes of long aprons (P13) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach legs (P9, P11) and legs (P10, P12) to long aprons (P13), then tighten the cam nuts using a Phillips head screwdriver.

Step 8





You will need	
	
2 x Cam Nuts (H3)	1 x Glue (H10)
	
4 x Plastic Glides (H11)	Phillips Head Screwdriver
	
Hammer	

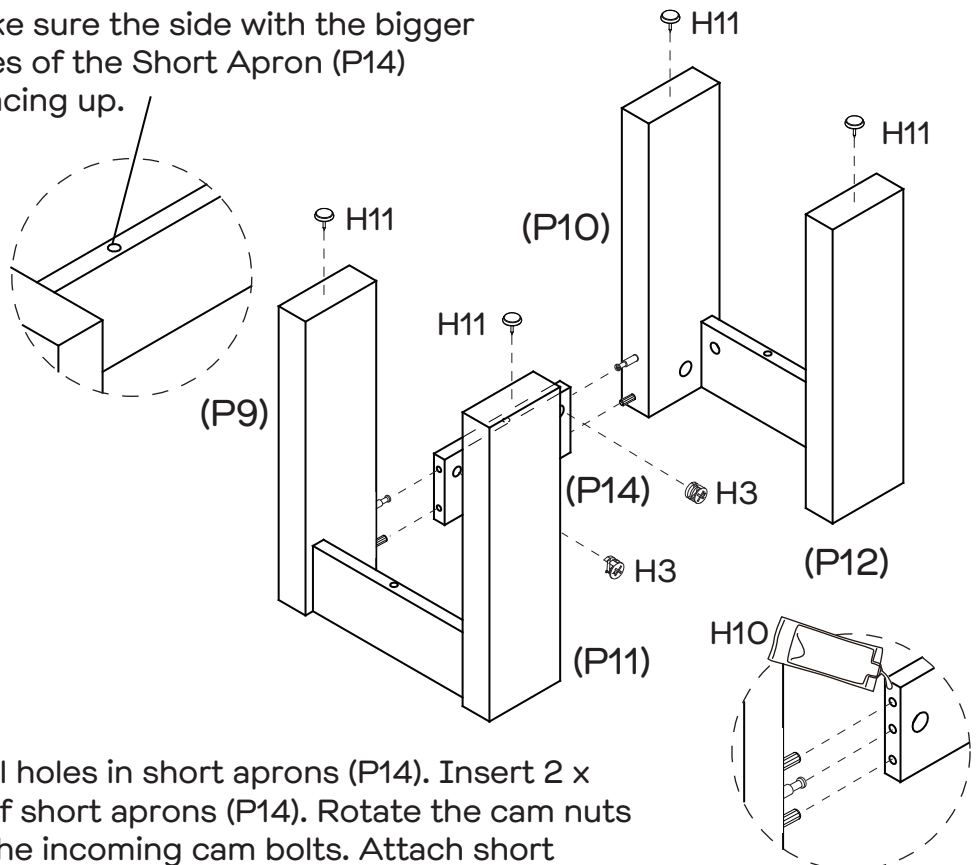
Make sure the side with the bigger holes of the Short Apron (P14) is facing up.



Squeeze Glue (H10) into dowel holes in short aprons (P14). Insert 2 x cam nuts (H3) into the holes of short aprons (P14). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach short apron (P14) to legs (P9, P10) then tighten the cam nuts using a Phillips head screwdriver. Hammer 4 x plastic glides (H11) into end of each leg.



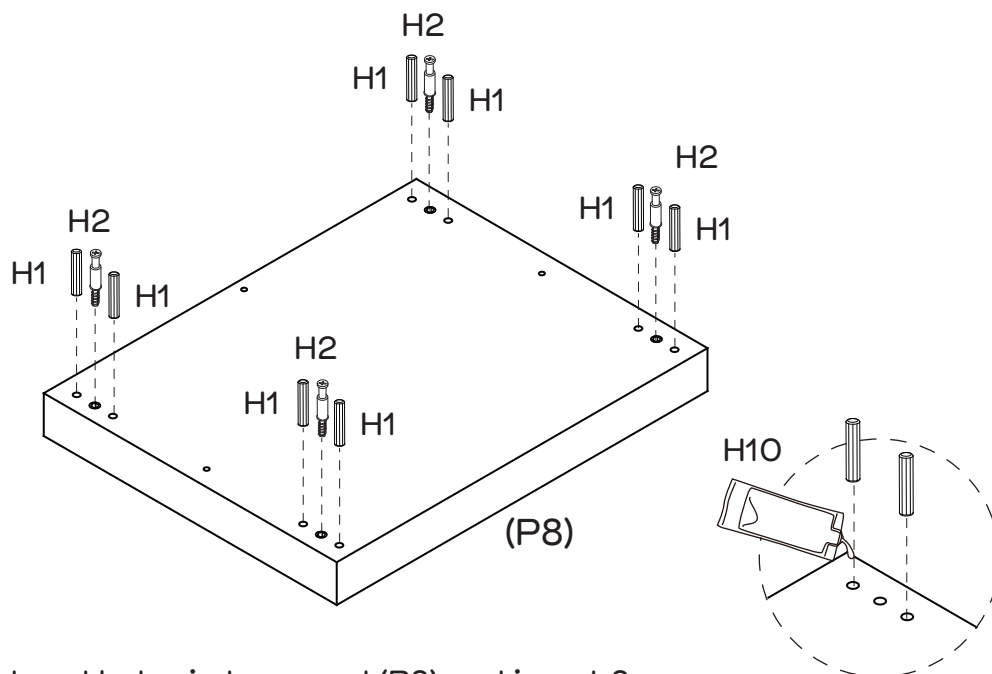

Step 9


You will need	
	
8 x Dowels (H1)	4 x Cam Bolts (H2)
	
1 x Glue (H10)	Phillips head screwdriver



Squeeze Glue (H10) into dowel holes in top panel (P8) and insert 8 x dowels (H1). Screw 4 x cam bolts (H2) into top panel (P8) with a Phillips head screwdriver.


Step 10

You will need	
	
4 x Cam Nuts (H3)	3 x Screws (H9)
	
1 x Glue (H10)	Phillips head screwdriver

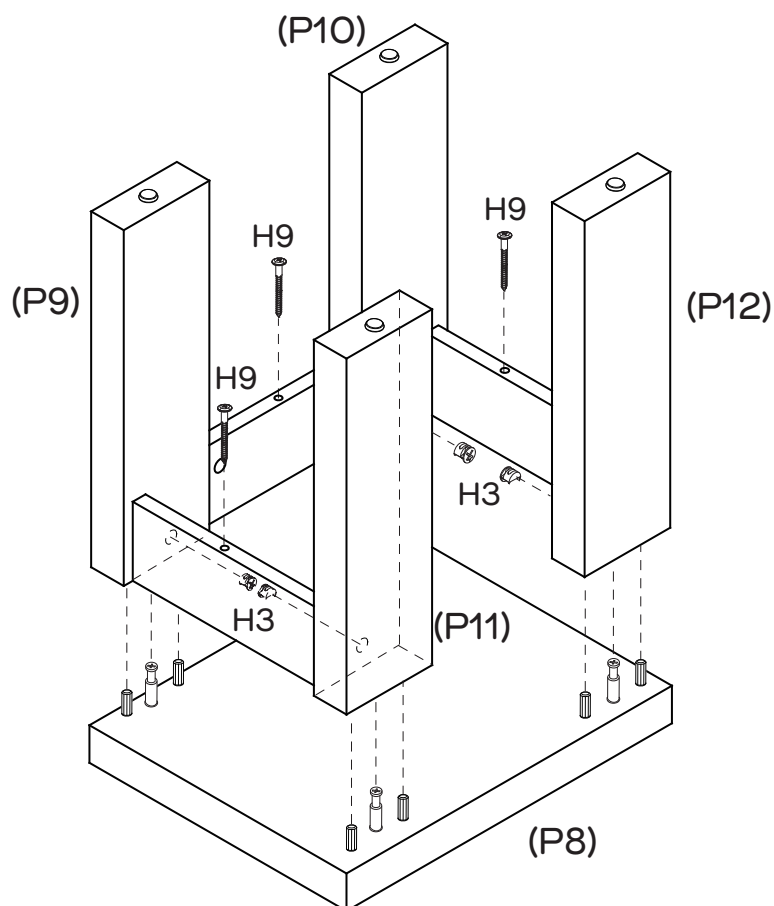


Squeeze Glue (H10) to dowel in top panel (P8). Insert 4 x cam nuts (H3) into the holes of legs (P9, P10, P11, P12). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach table leg frame to top panel (P1), tighten cam nuts using a Phillips head screwdriver. Attach long apron to top panel (P1) with 3 x screws using a Phillips head screwdriver.

Step 11

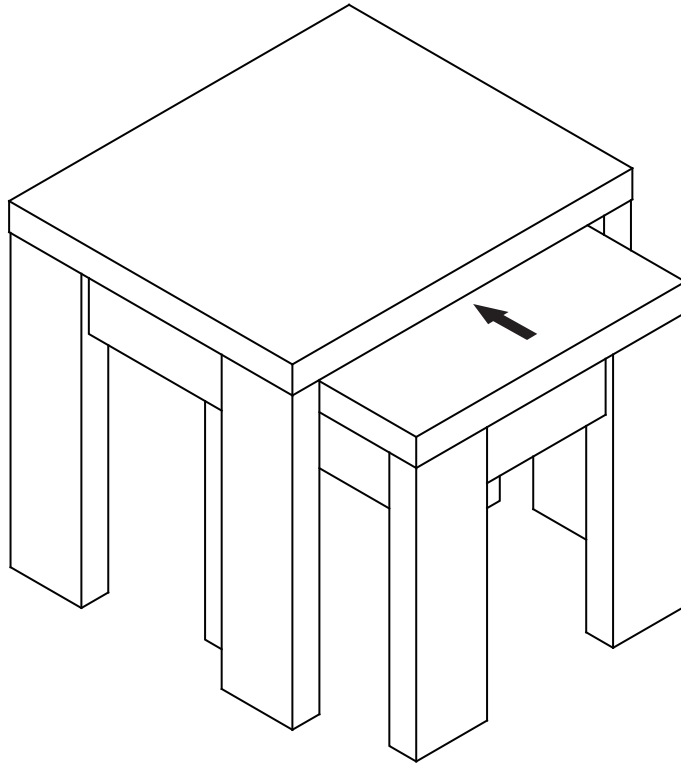

Step 12

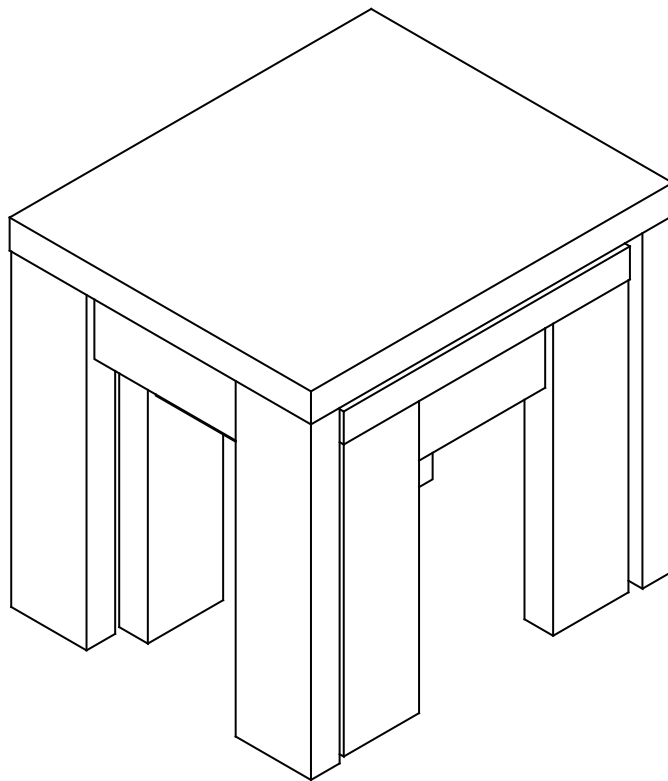

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.