




**Fantastic  
Furniture**

Version 1.0

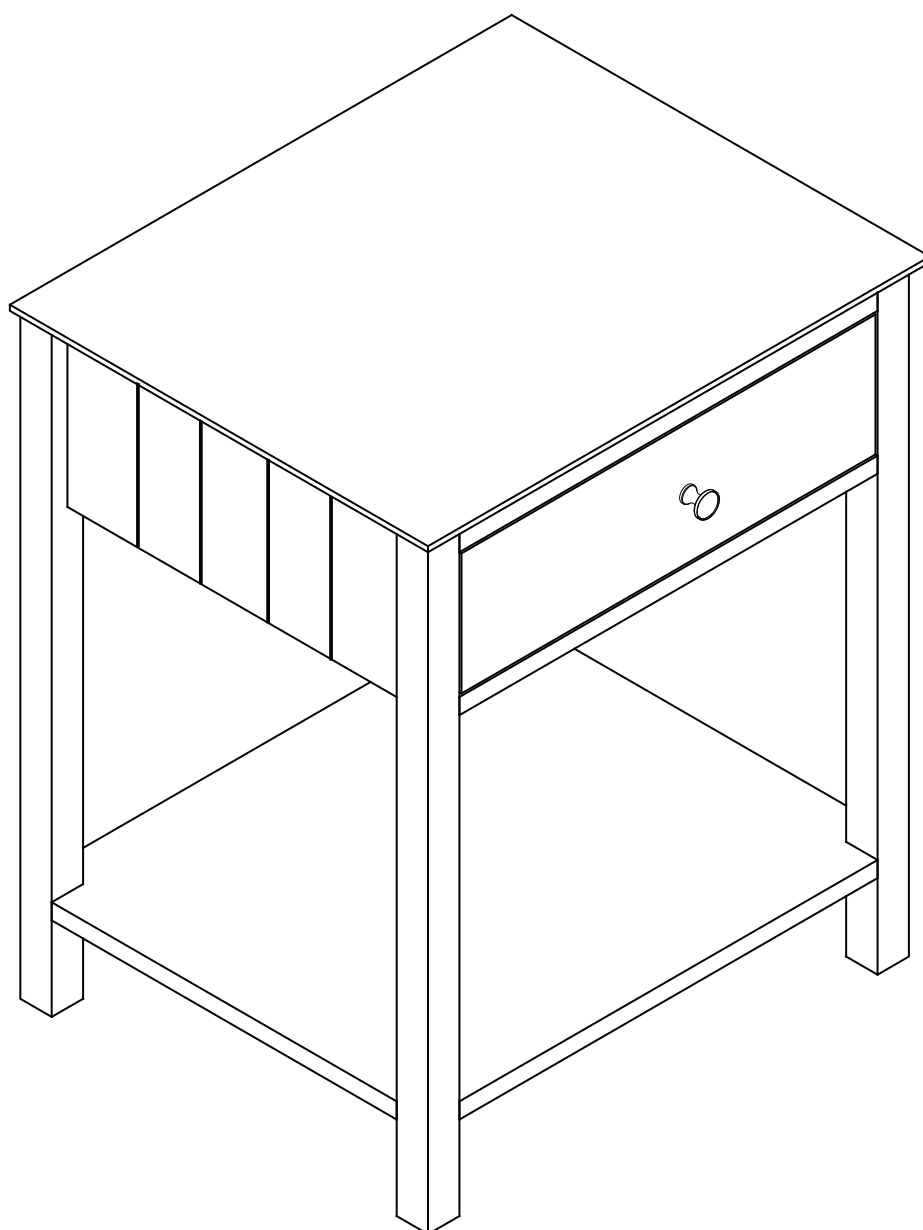

# Hamilton

Bedside 1 Drawer

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

Recommended weight capacity : 30kgs on top.



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO  
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

## Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

### Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

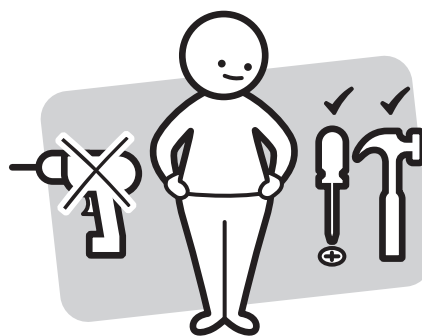

Make sure you have all the required tools. Never use power tools unless instructed.

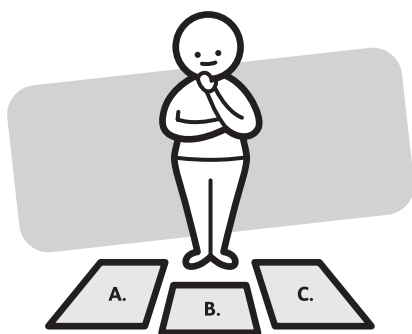

Identify and lay out all of the components before you begin assembly.

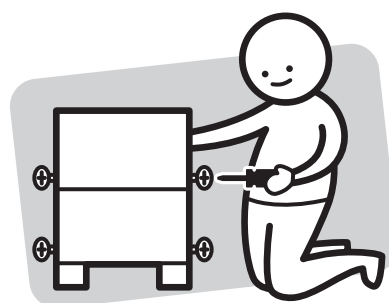

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need


to assemble the product



DO NOT USE




**Other tools you need:**  
Phillips head screwdriver;

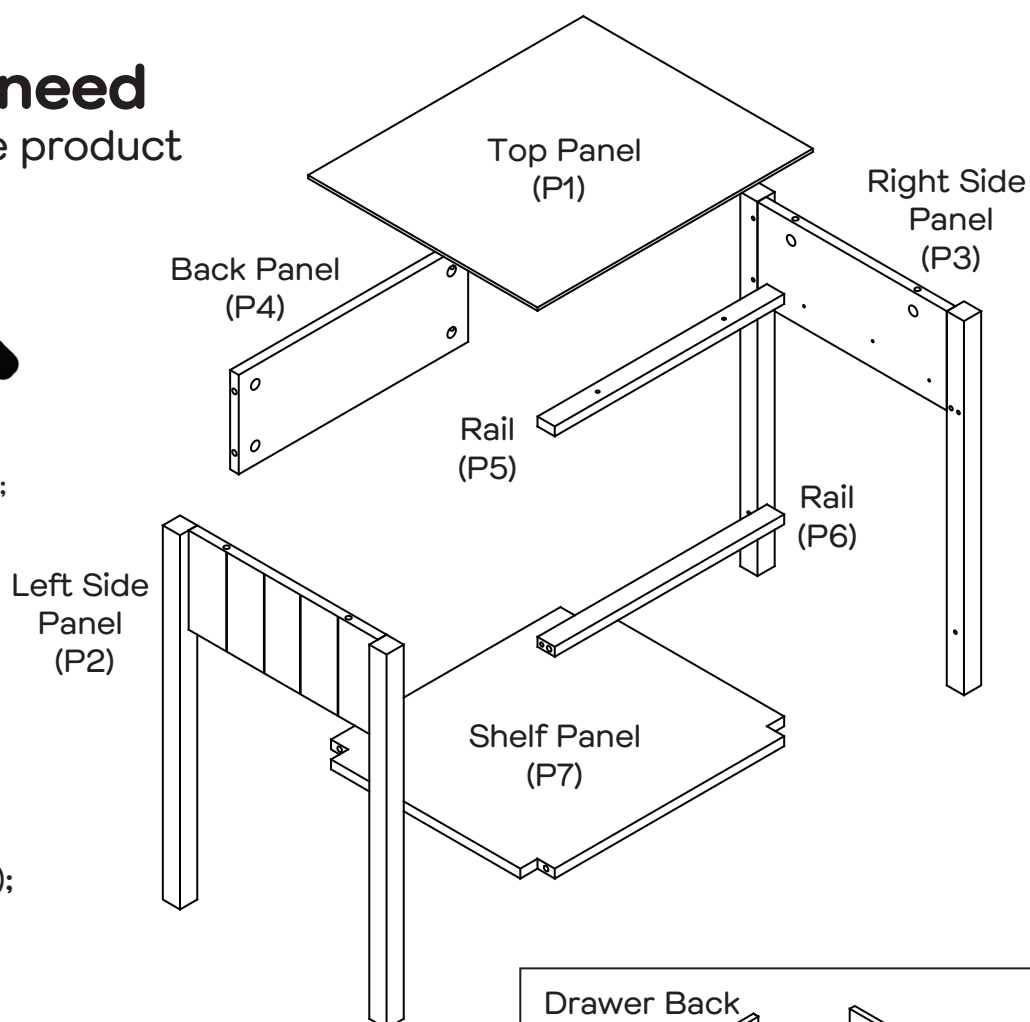


## Parts list

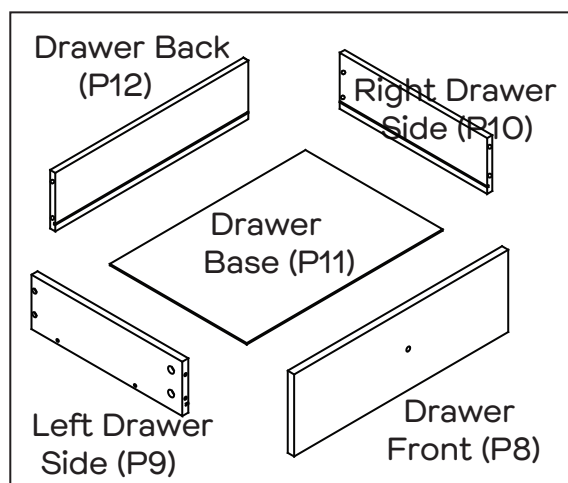


Top Panel (P1);  
Left Side Panel (P2);  
Right Side Panel (P3);  
Back Panel (P4);  
Rail (P5);  
Rail (P6);  
Shelf Panel (P7);  
Drawer Front (P8)  
Left Drawer Sides (P9);  
Right Drawer Sides (P10);  
Drawer Base (P11);  
Drawer Back (P12);

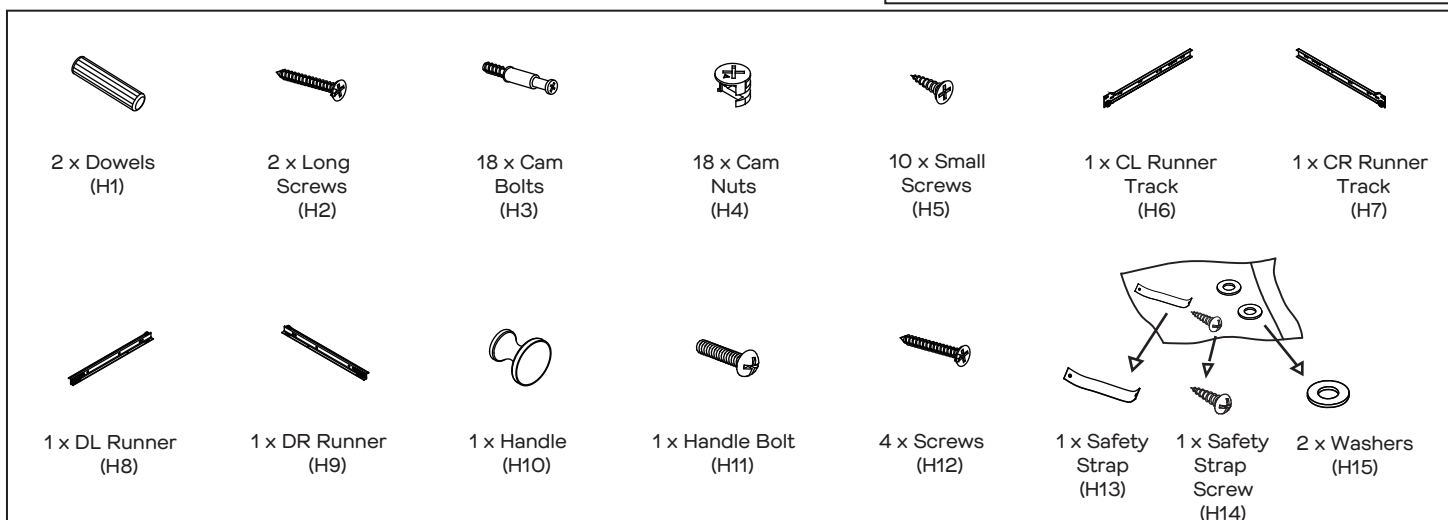


## Hardware pack







# Step 1


You will need	
	
4 x Cam Bolts (H3)	2 x Long Screws (H2)
	
Phillips Head Screwdriver	

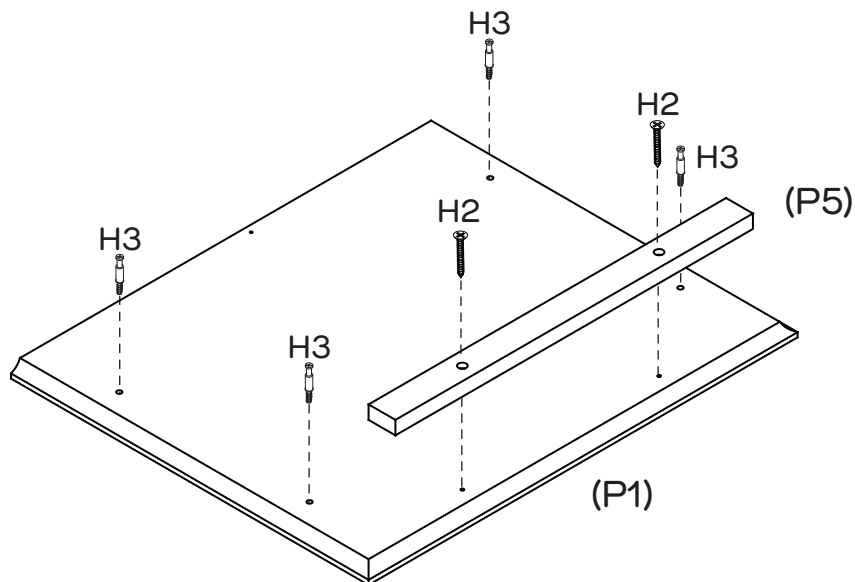

Attach 4 x Cam Bolts (H3) to Top Panel (P1), and attach Rail (P5) to Top Panel (P1) with 2 x Long Screws (H2) by tightening the Phillips Head Screwdriver.



# Step 2


You will need	
	
6 x Small Screws (H5)	1 x CL Runner Track (H6)
	
1 x CR Runner Track (H7)	Phillips Head Screwdriver

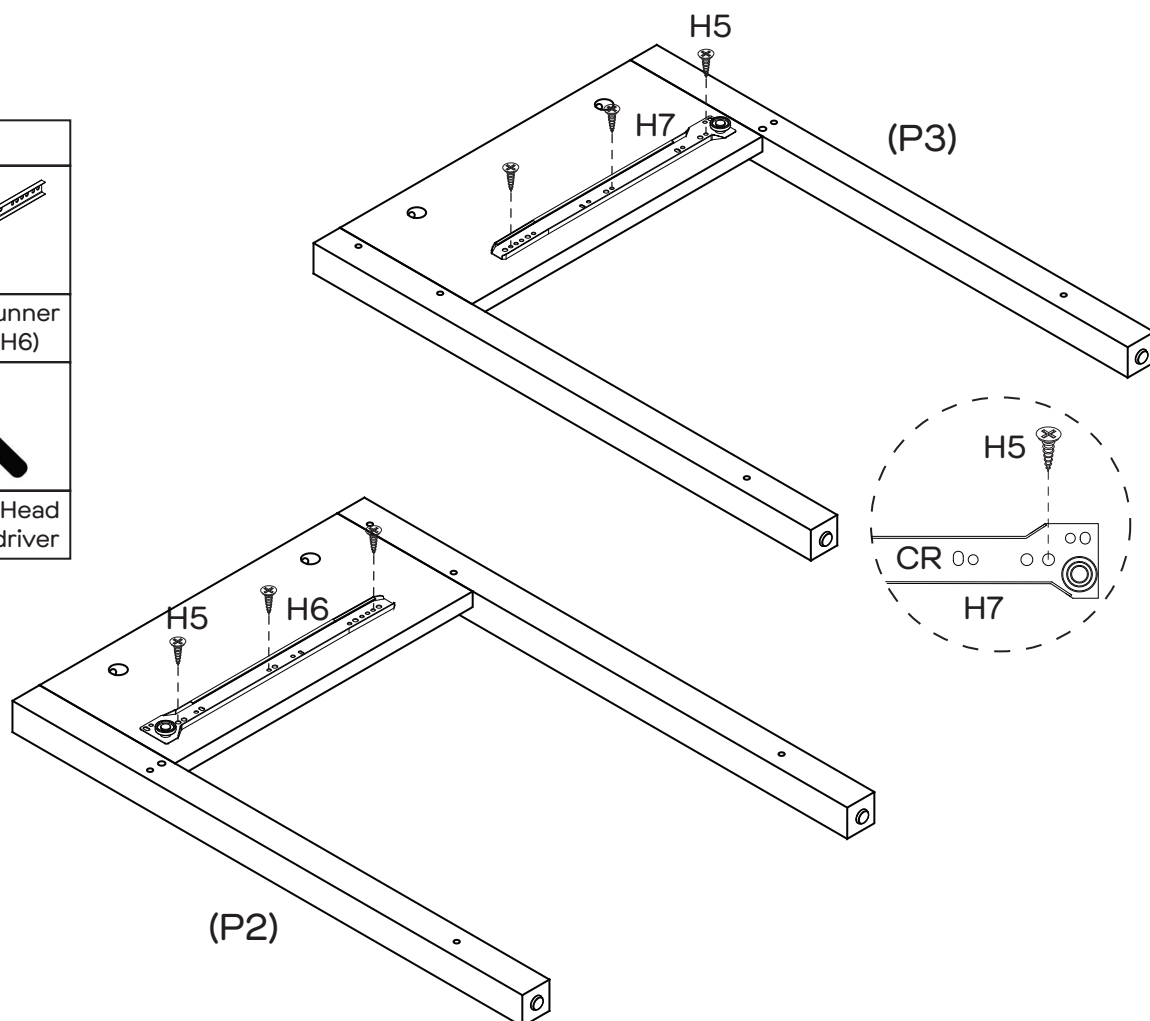

Attach 1 x CL Runner Track (H6) and 1 x CR Runner Track (H7) to Left & Right Side Panels (P2&P3) with 6 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.




## Step 3



You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver

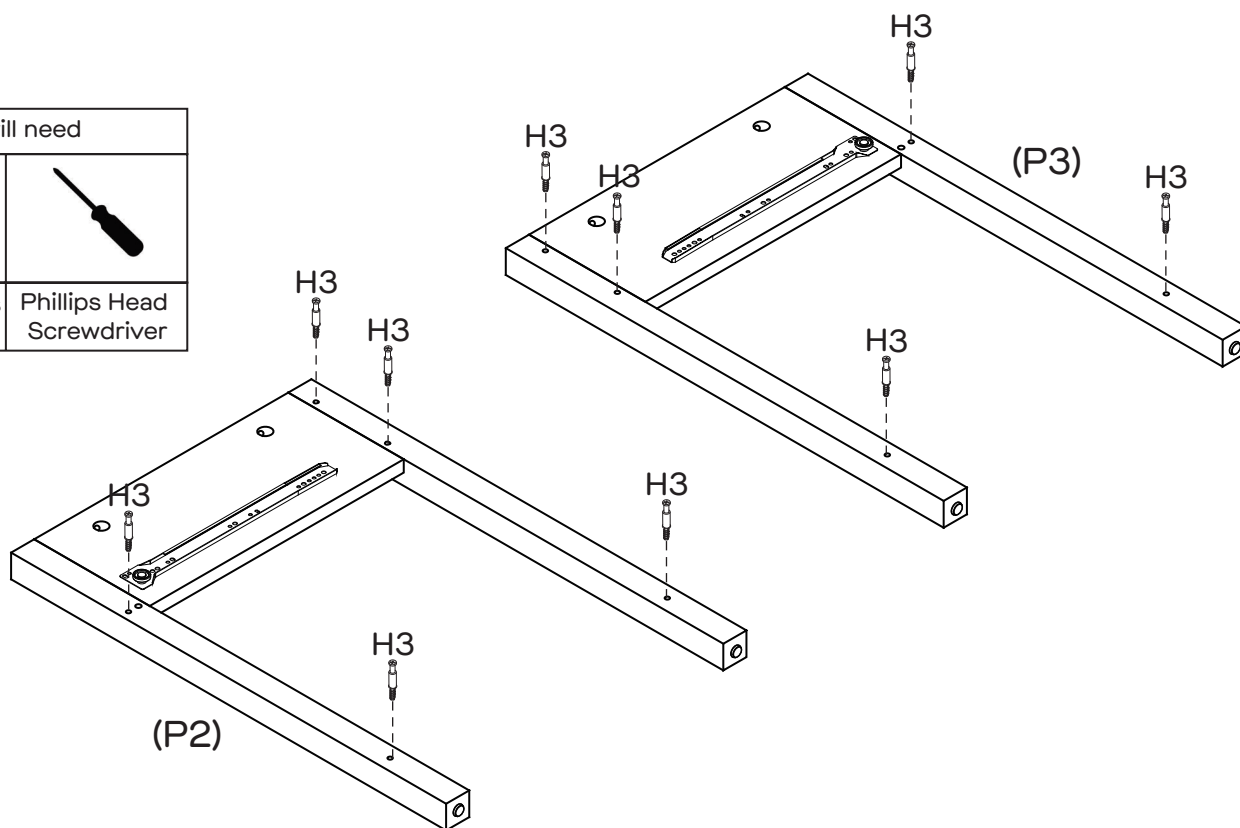

Attach 10 x Cam Bolts (H3) to Left & Right Side Panels (P2&P3) by tightening the Phillips Head Screwdriver.




## Step 4


You will need	
	
5 x Cam Nuts (H4)	1 x Dowel (H1)
	
Phillips Head Screwdriver	

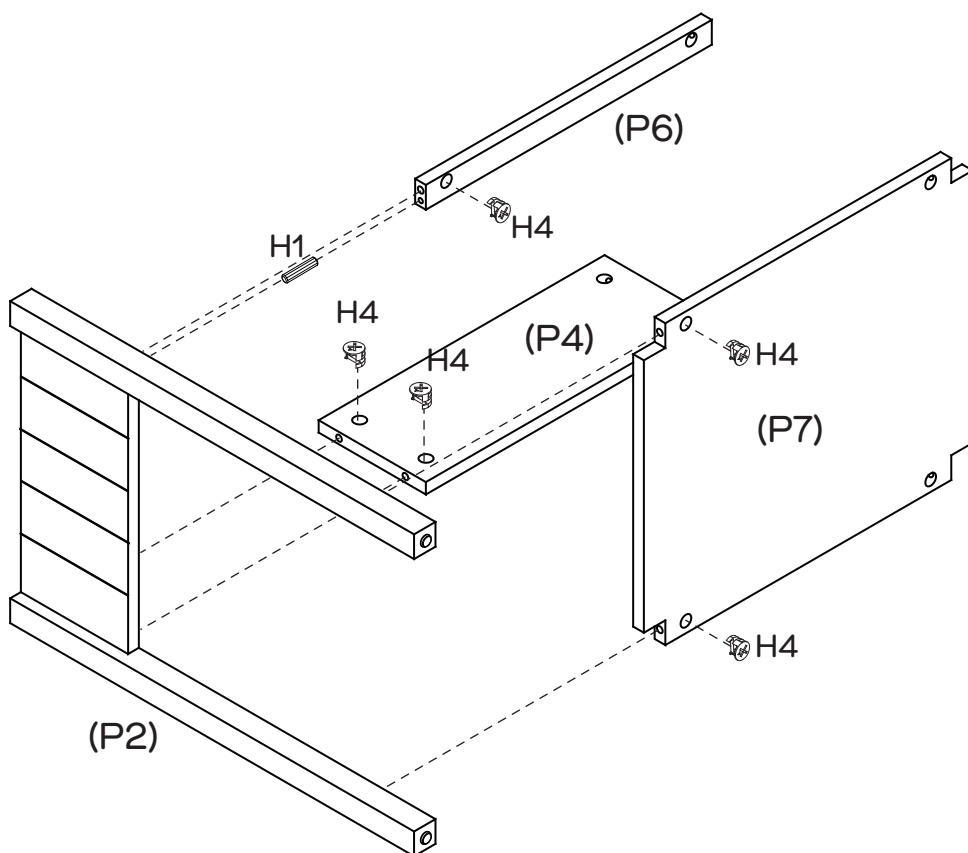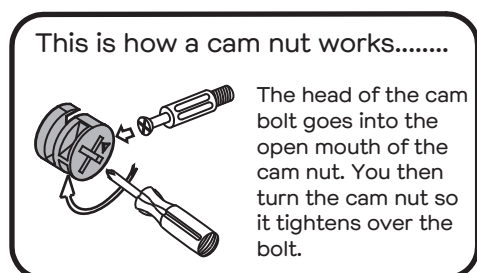

Insert 1x Dowel (H1) into Left Side Panel (P2). Insert 4 x Cam Nuts (H4) into Rail & Back Panel & Shelf Panel (P6&P4&P7) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Rail & Back Panel & Shelf Panel (P6&P4&P7) to Left Side Panel (P2) by tightening all cam nuts with the Phillips Head

## Step 5


You will need	
	
5 x Cam Nuts (H4)	1 x Dowel (H1)
	
Phillips Head Screwdriver	

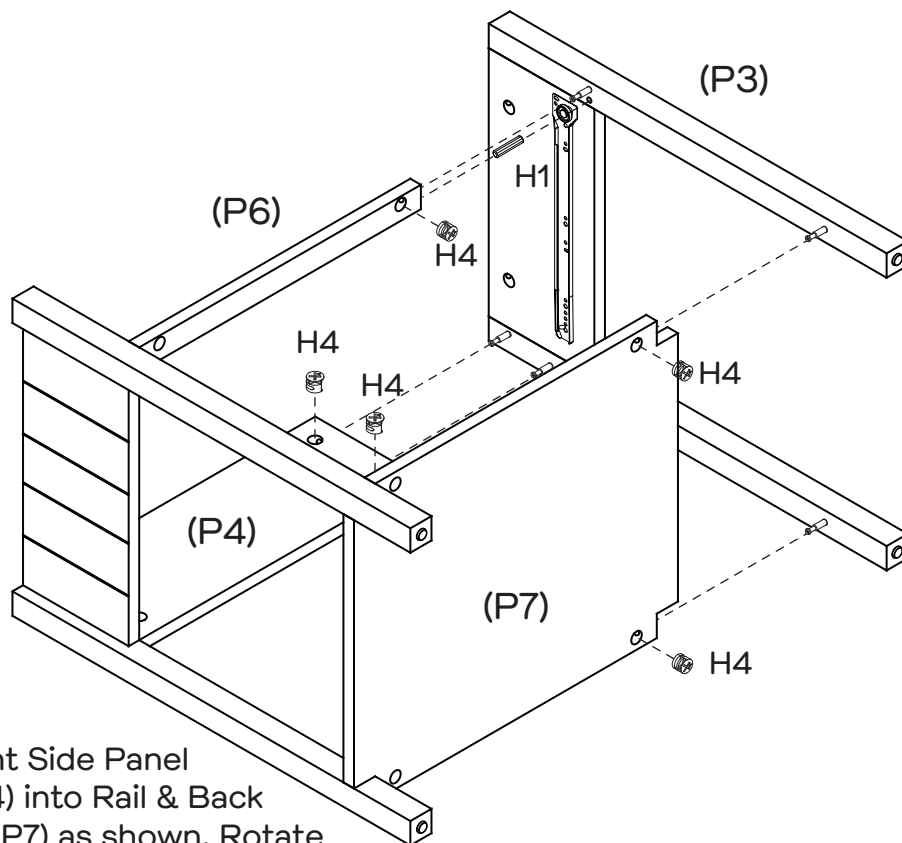

Insert 1x Dowel (H1) into Right Side Panel (P3). Insert 4 x Cam Nuts (H4) into Rail & Back Panel & Shelf Panel (P6&P4&P7) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Rail & Back Panel & Shelf Panel (P6&P4&P7) to Right Side Panel (P3) by tightening all cam nuts with the Phillips Head Screwdriver.

## Step 6


You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

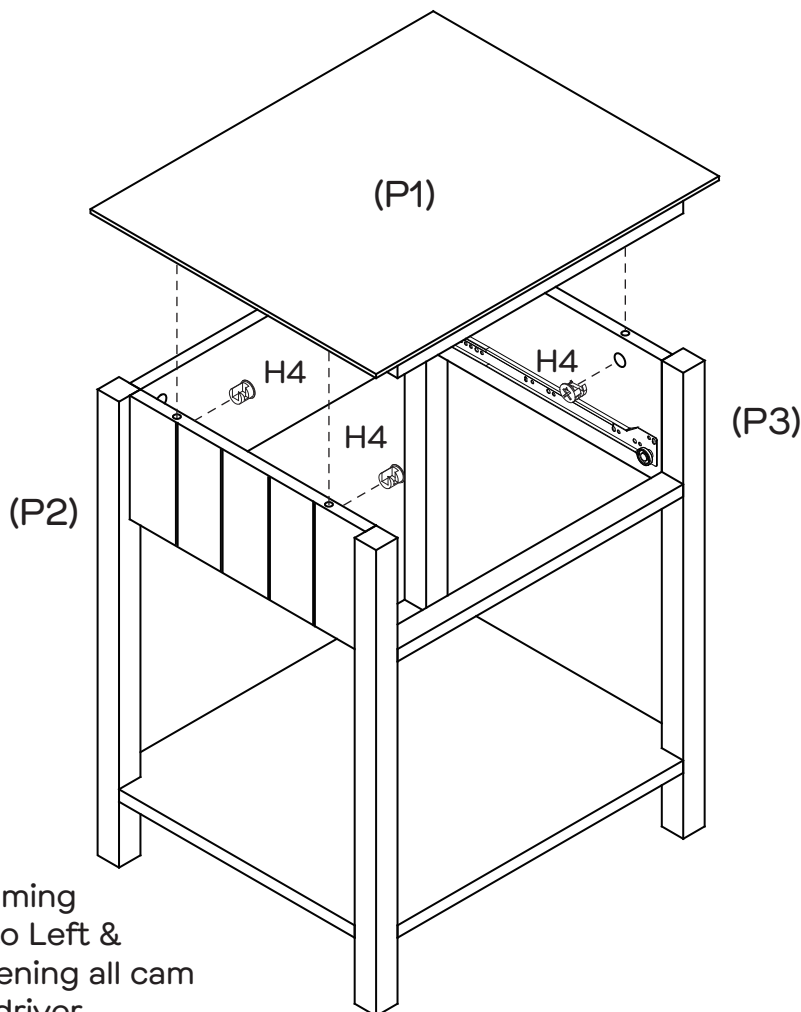

Insert 4 x Cam Nuts (H4) into Left & Right Side Panel (P2&P3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to Left & Right Side Panel (P2&P3) by tightening all cam nuts with the Phillips Head Screwdriver.



## Step 7


You will need	
	
1 x Safety Strap (H13)	1 x Safety Strap Screw (H14)
	
1 x Washer (H15)	Phillips Head Screwdriver

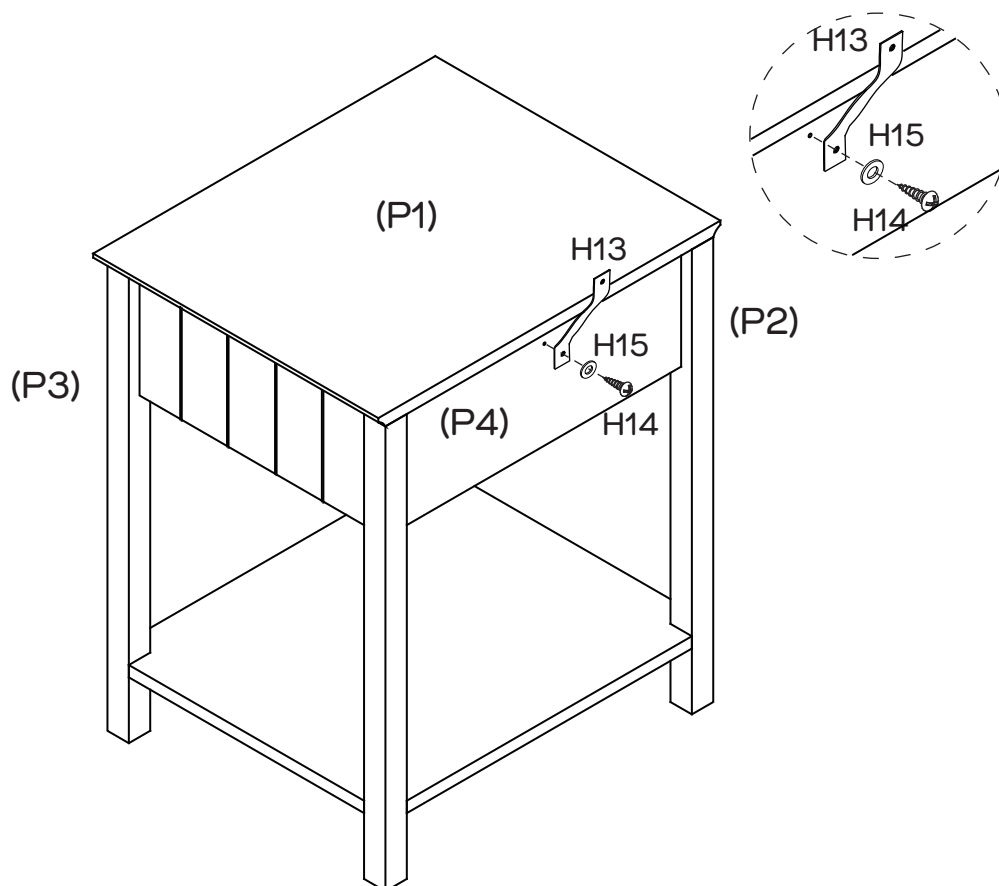

Use 1 x Safety Screw (H14) and 1 x Washer (H15) to connect 1 x Safety Strap (H14) on Back Panel (P4) by tightening with the Phillips head screwdriver.

## Step 8



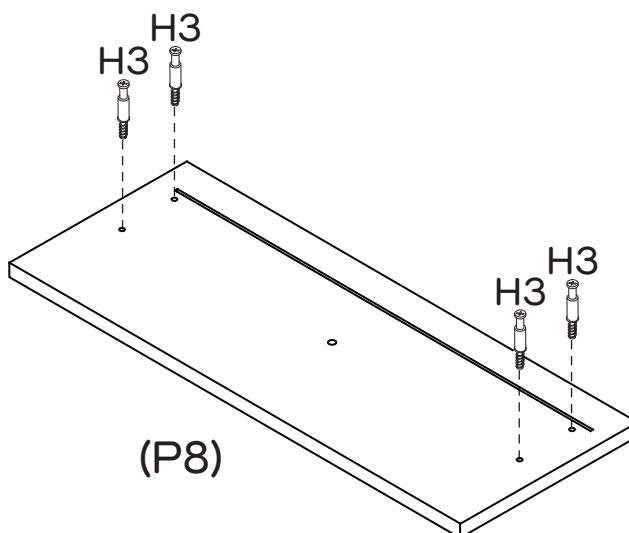You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver




Attach 4 x Cam Bolts (H3) to Drawer Front (P8). Tighten with a Phillips Head Screwdriver.




## Step 9

You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

Insert 4 x Cam Nuts (H4) into Left&Right Drawer Side (P9&P10) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Front (P8) to Left&Right Drawer Side (P9&P10) by tightening all cam nuts with the Phillips Head Screwdriver.

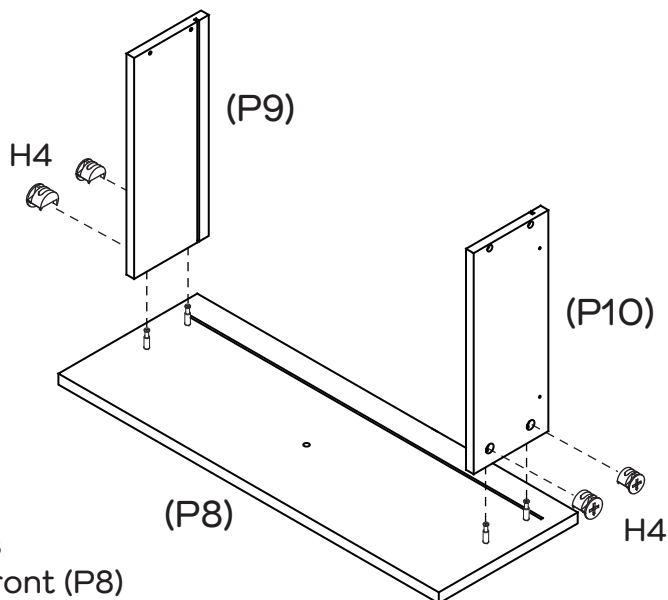

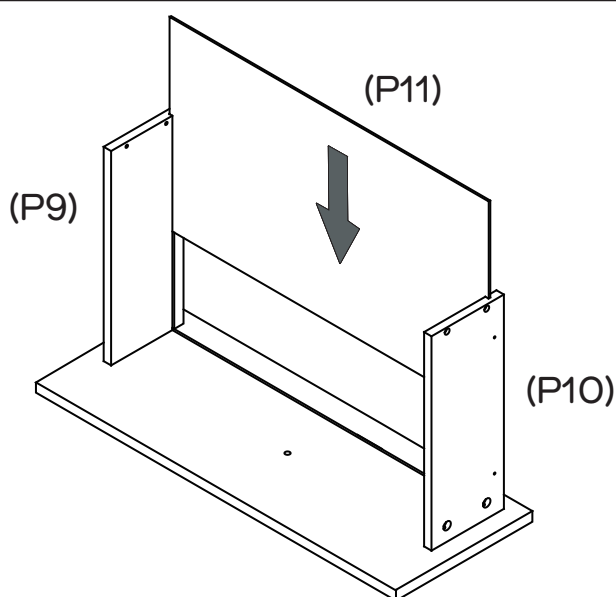

## Step 10




Slide the Drawer Base (P11) into the grooves between drawer sides as shown.

## Step 11


You will need	
	
4 x Screws (H12)	Phillips Head Screwdriver

Attach Drawer Back (P12) to Left & Right Drawer Side (P9&P10) with 4 x Screws (H12) by tightening with the Phillips Head Screwdriver. Ensure the Drawer Base lines up with the grooves the whole way around the drawer before securing.

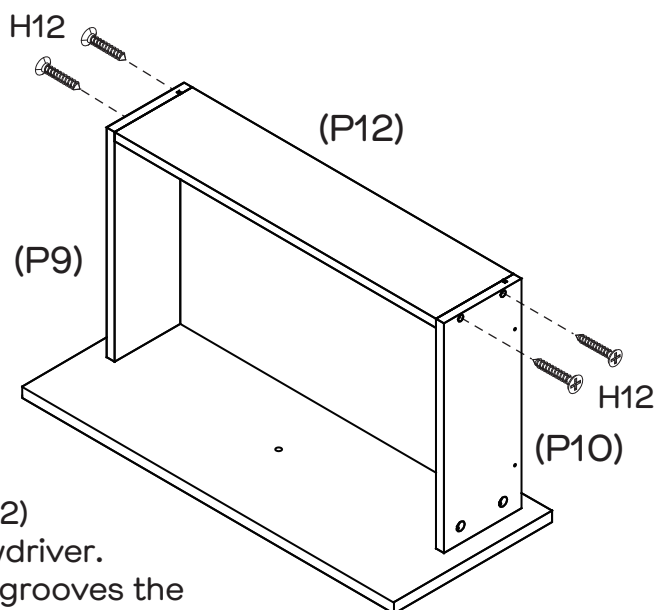

## Step 12


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips Head Screwdriver

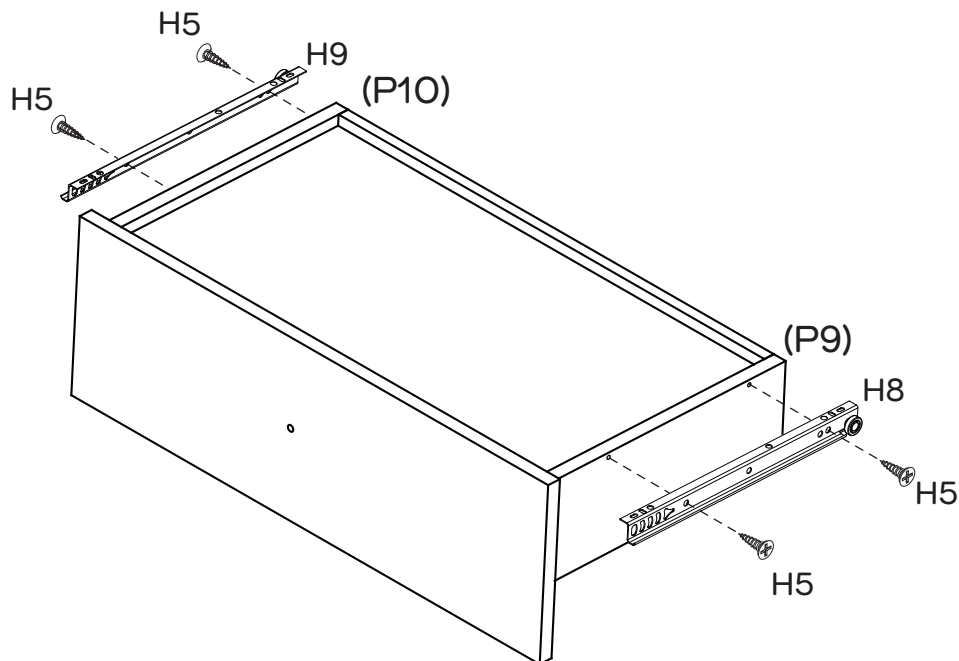

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P9) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P10) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


## Step 13

You will need	
1 x Handle Bolt (H11)	1 x Handle (H10)
Phillips Head Screwdriver	

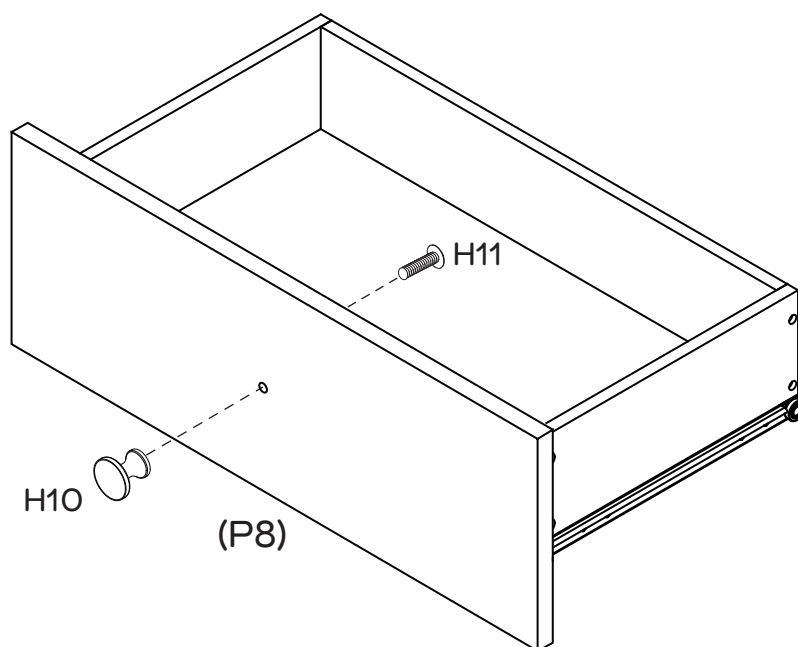



Attach 1 x Handle (H10) to Drawer Front (P8) with 1 x Handle Bolt (H11) by tightening with the Phillips Head Screwdriver.


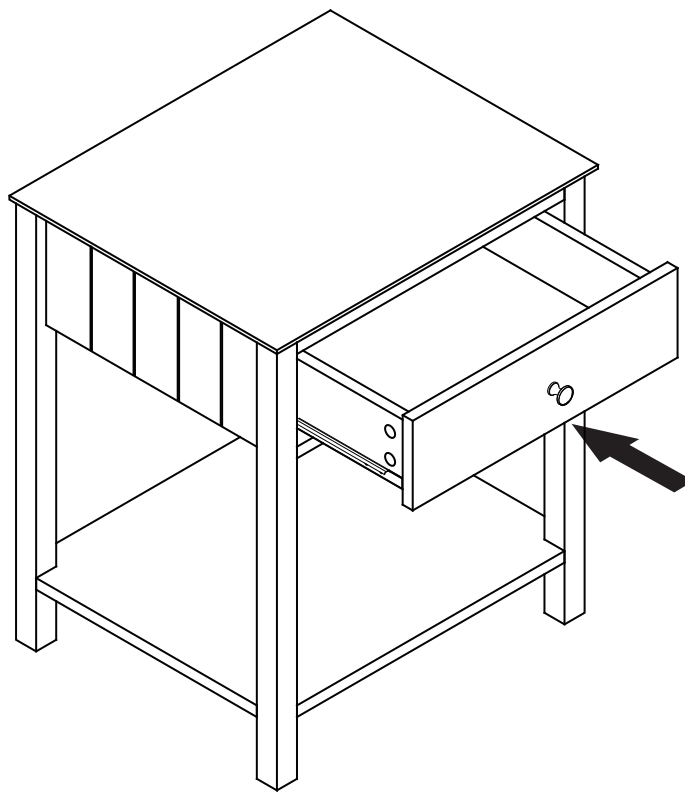
## Step 14



Insert the assembled drawers into the corresponding compartments as shown. Ensure the drawers slide easily along the rails.


## Step 15

You will need	
	
1 x Washer (H14)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

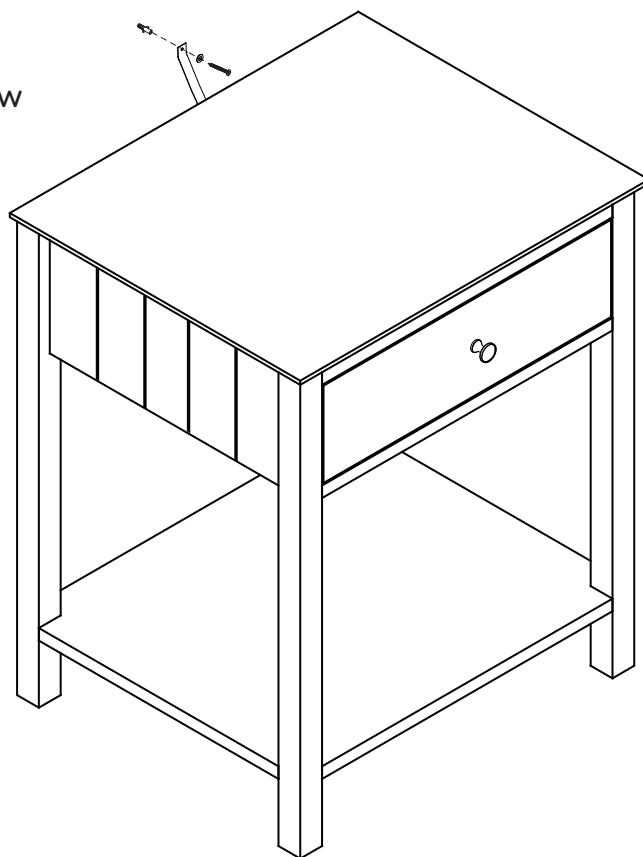

**Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.**

Move the dresser to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

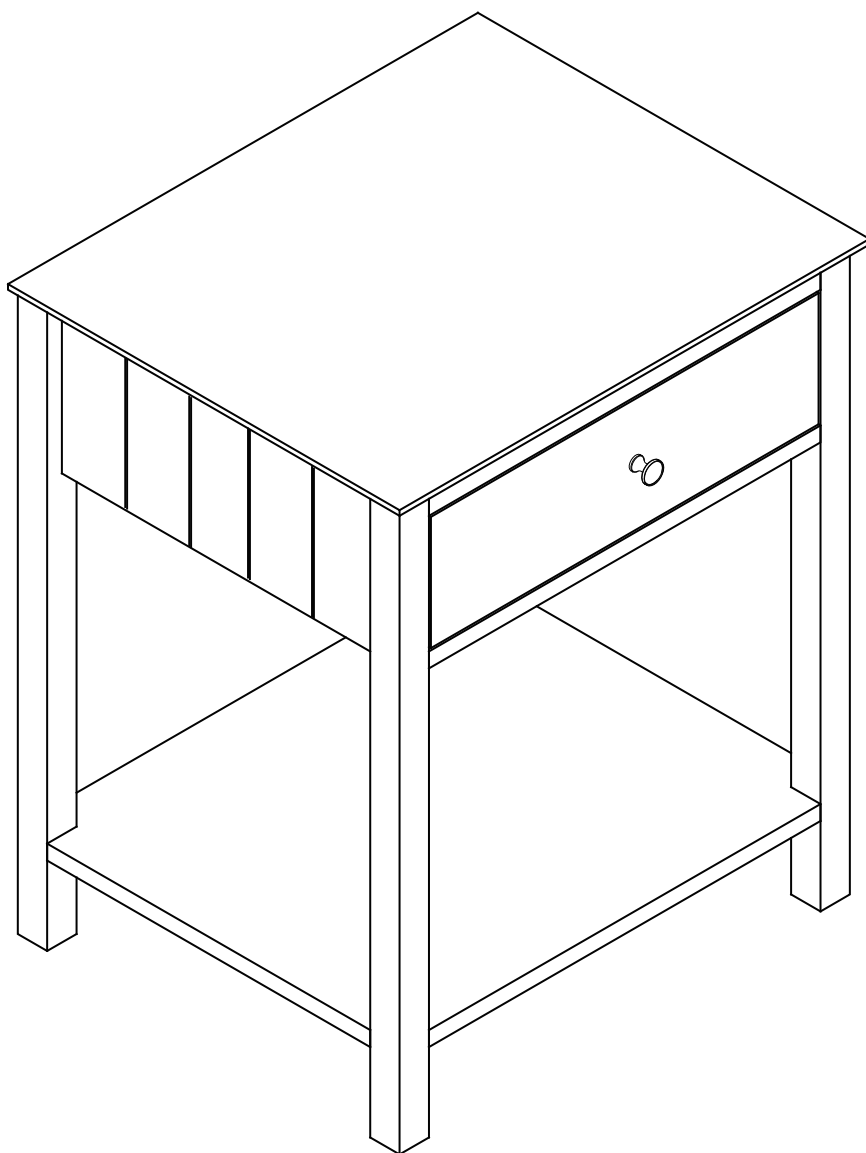

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.