




**Fantastic
Furniture**

Version 1.0

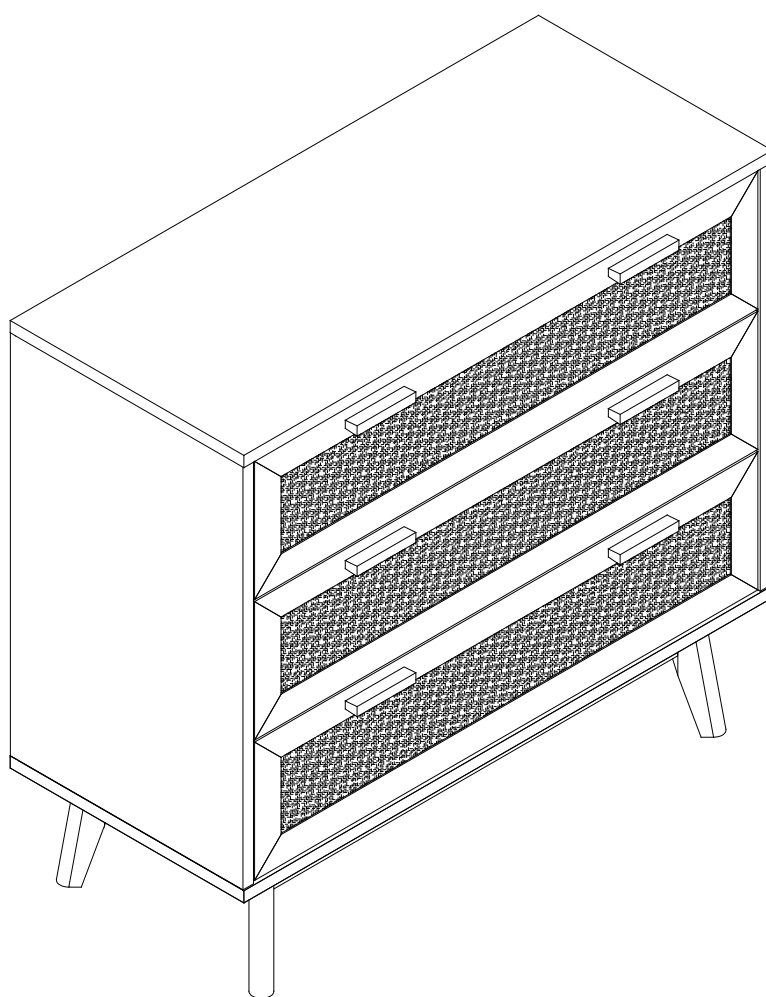

Two People



Required

Java
Dresser 3 Drawer
fantasticfurniture.com.au



Warning: Ensure the wall strap is attached to avoid serious injury

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Rattan

Rattan is a natural material that will respond to humidity in the environment. Low humidity may cause the rattan to shrink. High humidity may cause the rattan to absorb moisture and expand, causing the weaving to look loose and wavy.

This is a natural phenomenon and not a defect.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

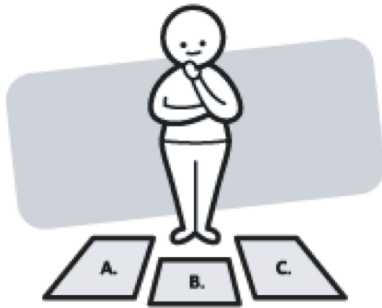

Identify and lay out all of the components before you begin assembly.

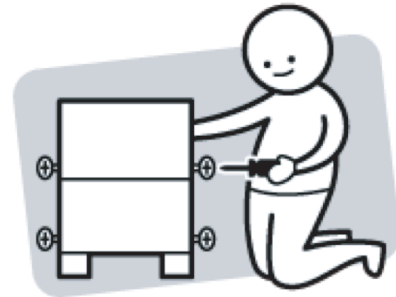

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Other tools you need


Flat Head Screwdriver;
Phillips Head Screwdriver;
Mallet

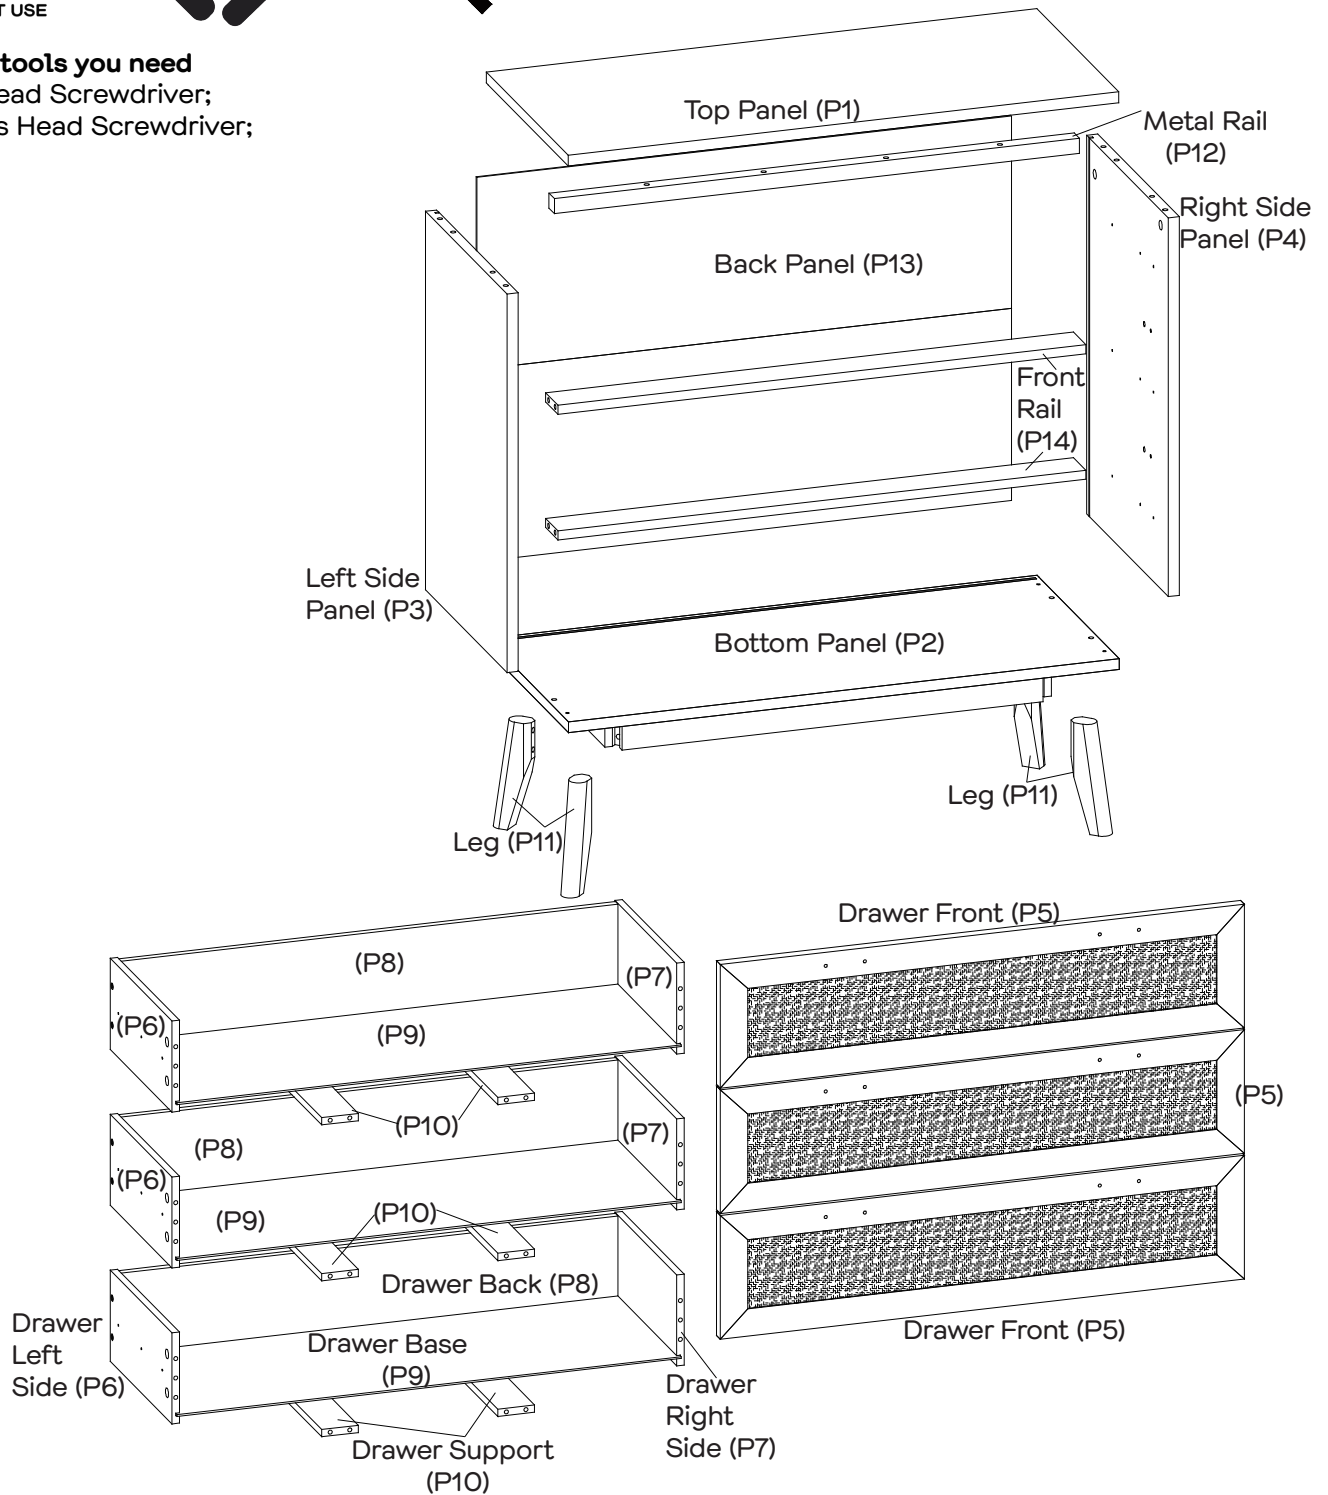

Parts list

- | | | |
|---------------------------|-----------------------------|-----------------------|
| 1 x Top Panel (P1) | 3 x Drawer Left Sides (P6) | 4 x Legs (P11) |
| 1 x Bottom Panel (P2) | 3 x Drawer Right Sides (P7) | 1 x Metal Rail (P12) |
| 1 x Left Side Panel (P3) | 3 x Drawer Backs (P8) | 1 x Back Panel (P13) |
| 1 x Right Side Panel (P4) | 3 x Drawer Bases (P9) | 2 x Front Rails (P14) |
| 3 x Drawer Fronts (P5) | 6 x Drawer Supports (P10) | |

Hardware Pack



32 x Cam Bolts
(H1)



8 x Large Cam
Nuts (H2)



12 x Dowels ø8mm
(H3)



6 x Handles
(H4)



4 x Felt Feet
(H5)



6 x Screws 16mm
(H6)



6 x Back Panel
Connectors (H7)




8 x Bolts 55mm
(H8)



12 x Flat Washers
(H9)




8 x Spring
Washers (H10)



12 x Screws 28mm
(H11)



1 x Allen Key
(H12)




2 x Wall Straps
(H13)




2 x Screws 25mm
(H14)



24 x Small Cam
Nuts (H15)



6 x Dowels ø6mm
(H16)



28 x Screws 38mm
(H17)



36 x Screws 12mm
(H18)




6 x Slides
(H19)



4 x Bolts 50mm
(H20)

Step 1



You will need	
4 x Felt Feet (H5)	

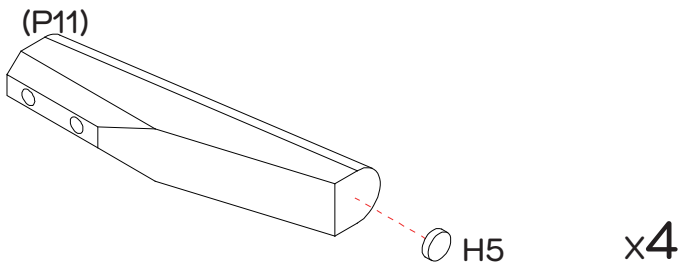

Attach 1 x felt foot (H5) onto each leg (P11) as shown.





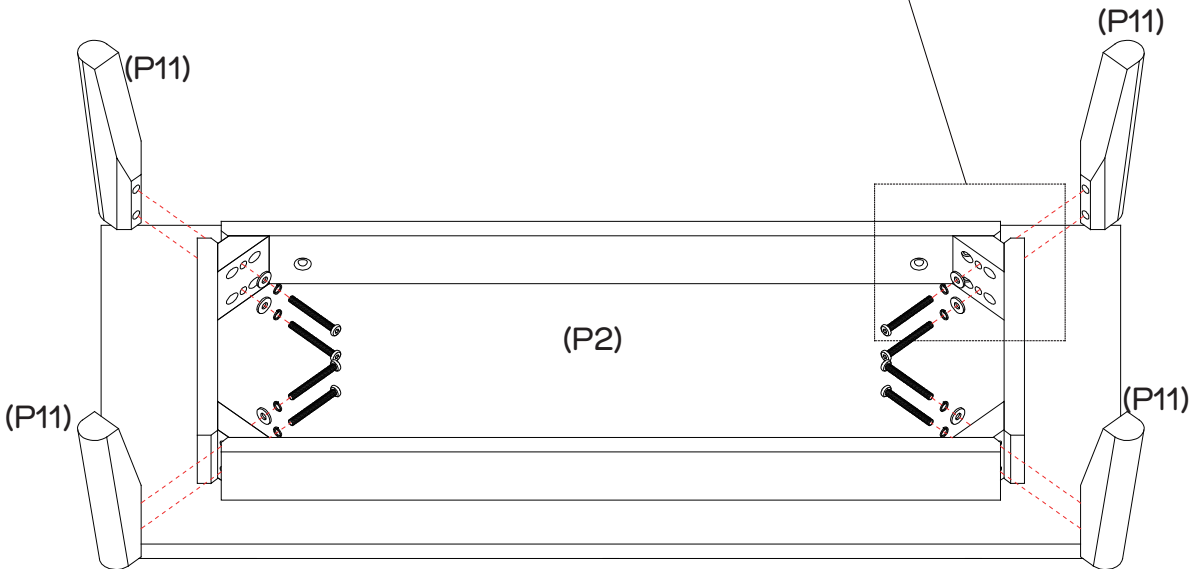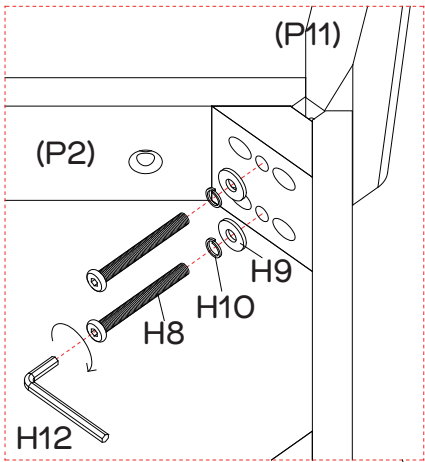

Step 2

You will need	
8 x Bolts (H8)	8 x Flat Washers (H9)
8 x Spring Washers (H10)	1 x Allen Key (H12)




Attach 1 x leg (P11) onto bottom panel (P2),using 2 x bolts (H8), 2 x spring washers (H10) and 2 x flat washers (H9).
Tighten the bolts with allen key (H12).
Repeat this step for the other 3 x legs (P11).
With assistance turn the assembled frame over.


Step 3

You will need	
	
6 x Slides (H19)	18 x Screws 12mm (H18)
	
Phillips Head Screwdriver	8 x Dowels ø8mm (H3)
	
Mallet	4 x Cam Bolts (H1)

Separate the 6 x slide runners (H19-2) and slide tracks (H19-1) from the slides (H19) by following the steps below:
 Extend the slide runner (H19-2) all the way out.
 Press down the plastic release lever on the slide track (H19-1) and pull out the slide runner (H19-2) completely.

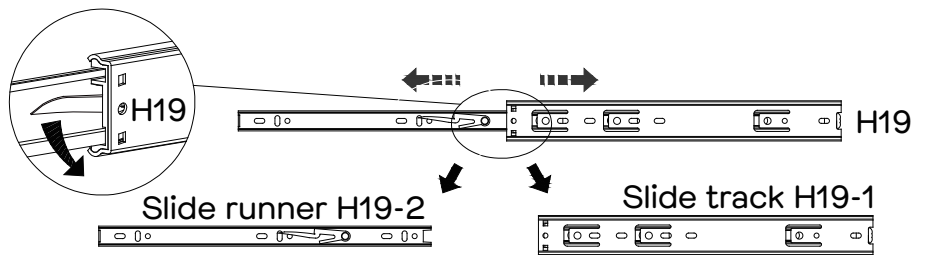



Adjust runner to access the screw holes.



Please fasten the screws through these holes for this step.



Note the position of the rubber stopper

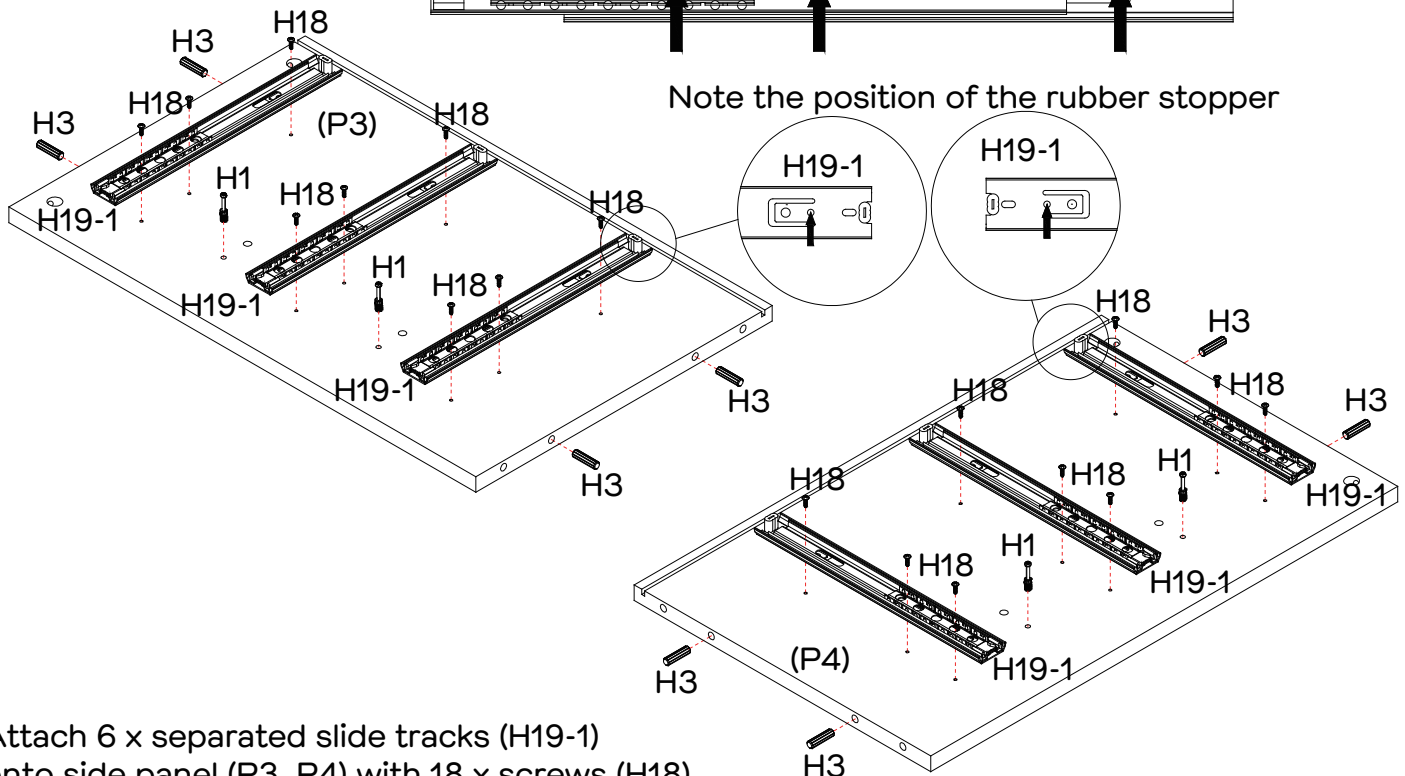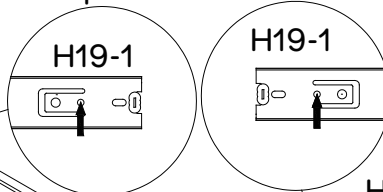




Attach 6 x separated slide tracks (H19-1) onto side panel (P3, P4) with 18 x screws (H18), using a phillips head screwdriver as shown.
 Ensure the slide tracks (H19-1) are attached so the rubber stopper is positioned near the grooves on side panel (P3, P4) as shown.

Screw 2 x cam bolts (H1) into each side panel (P3, P4), using a phillips head screwdriver.

Insert 4 x dowels (H3) into each panel (P3) & (P4) as shown.
 If needed use a mallet to gently tap the dowels into place.



Step 4


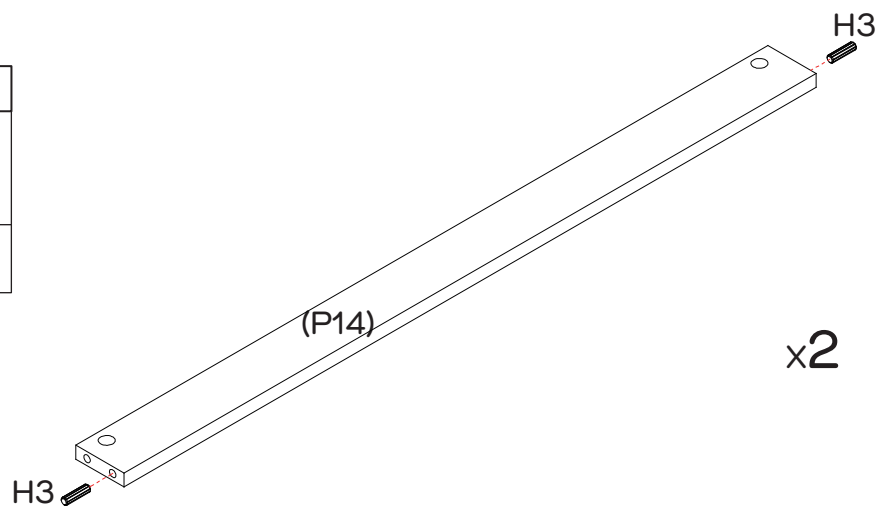
You will need	
	
4 x Dowels ø8mm (H3)	Mallet



Insert 2 x dowels (H3) into each front rail (P14) as shown.
Use a mallet to gently tap the dowels into place if needed.



Step 5


You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver

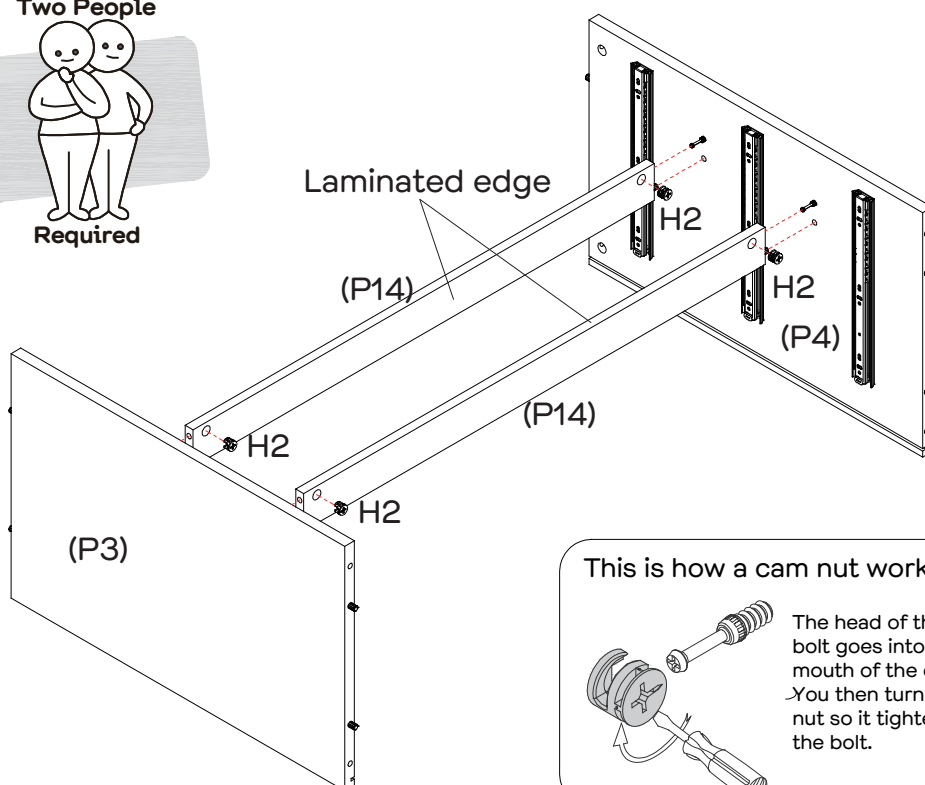

With assistance, position 2 x front rails (P14) between side panels (P3, P4), ensuring the grooves on the side panels (P3, P4) are on the same side.
Insert 4 x large cam nuts (H2) into front rails (P14).
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Using a flat head screwdriver turn clockwise to lock.


Step 6

You will need	
	
4 x Screws 38mm (H17)	Phillips Head Screwdriver

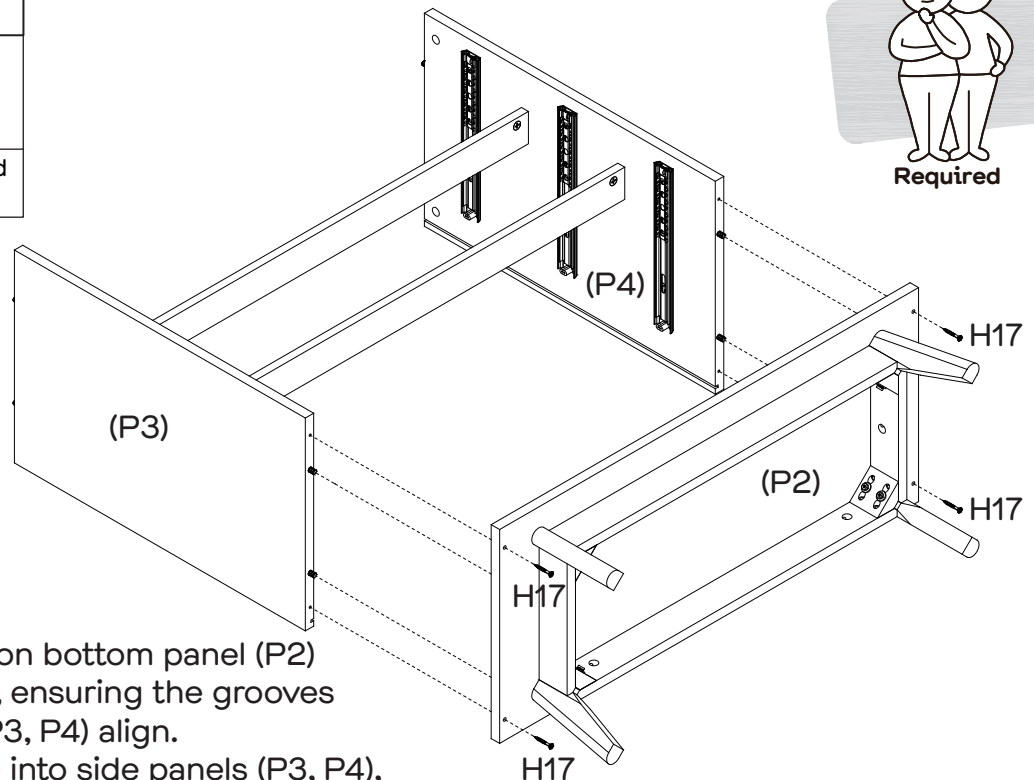




With assistance, position bottom panel (P2) to side panels (P3, P4), ensuring the grooves on all the panels (P2, P3, P4) align. Screw 4 x screws (H17) into side panels (P3, P4), using a phillips head screwdriver. With assistance, carefully turn the assembled frame over.

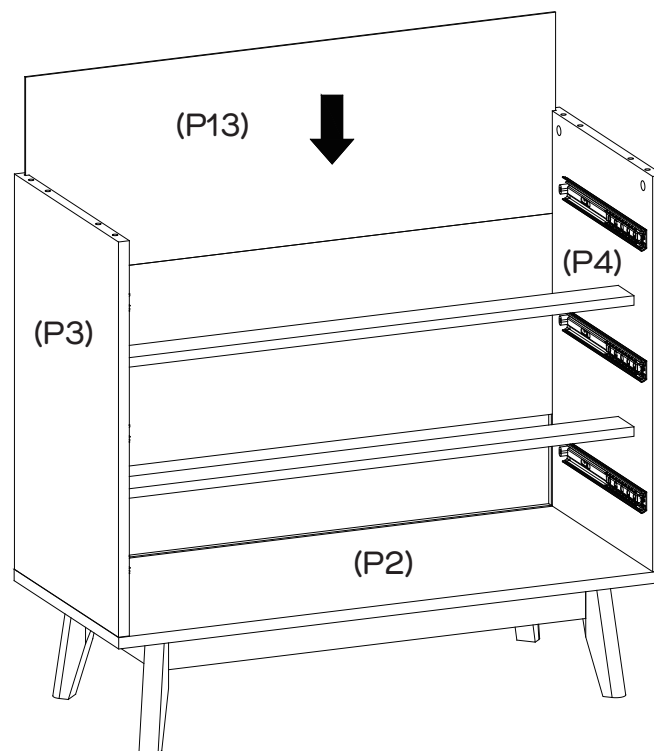
Step 7



Unfold and slide back panel (P13) into the grooves on side panels (P3, P4) and bottom panel (P2).



Step 8


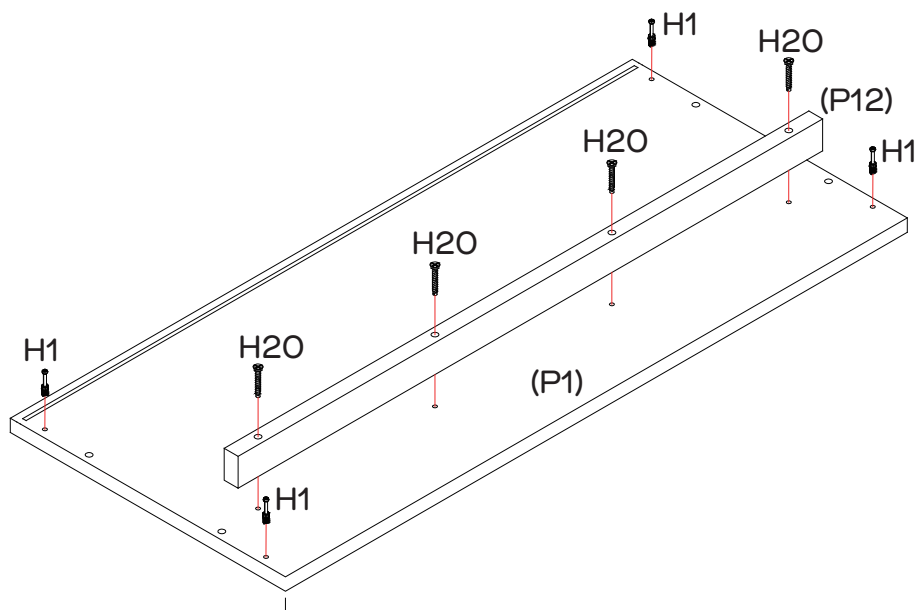
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver
	
4 x Bolts 35mm (H20)	



Screw 4 x cam bolts (H1) into top panel (P1), using a phillips head screwdriver. Attach metal rail (P12) onto top panel (P1) with 4 x bolts (H20), using a phillips head screwdriver.




Step 9


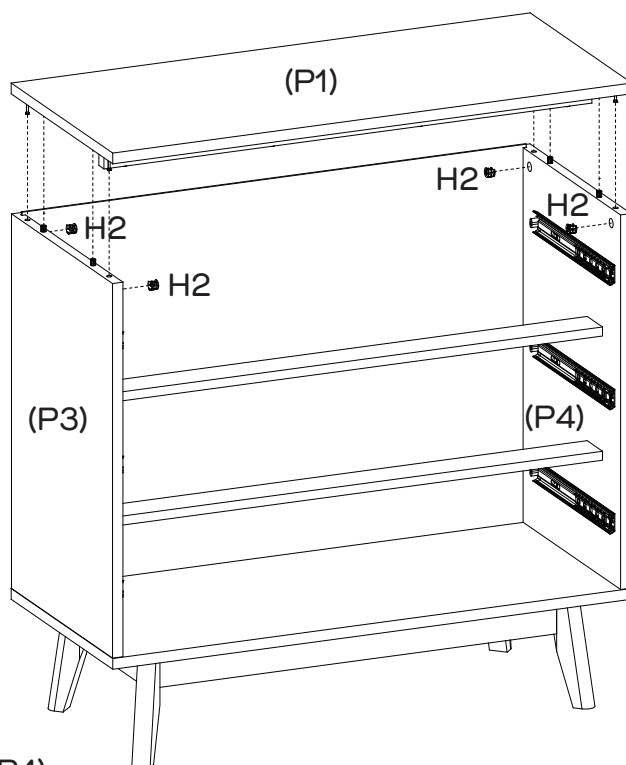

You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver



With assistance, position top panel (P1) onto the assembled frame as shown. Insert 4 x large cam nuts (H2) into panels (P3, P4). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Using a flat head screwdriver turn clockwise to lock.

Step 10

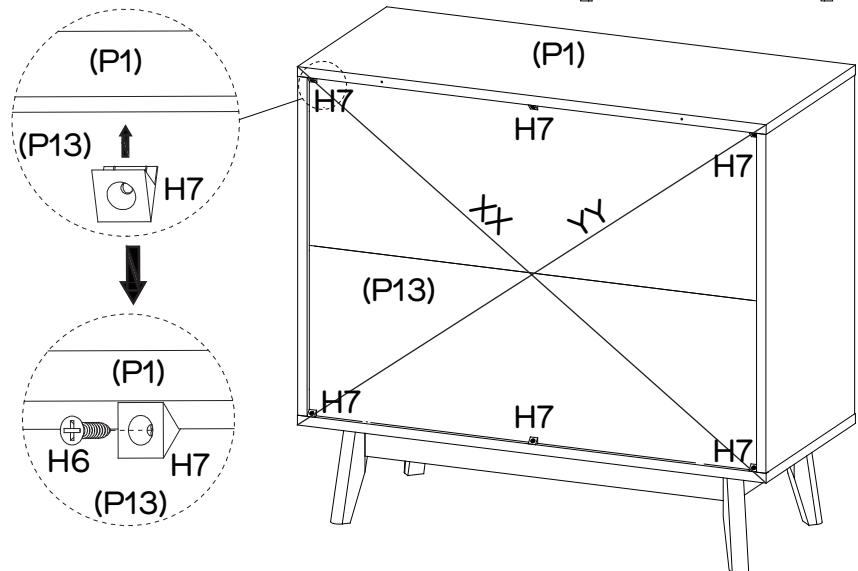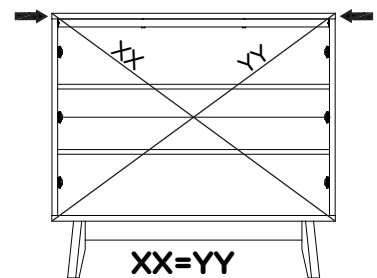

You will need	
	
6 x Screws 16mm (H6)	6 x Back Panel Connectors (H7)
	
Phillips Head Screwdriver	




If necessary, gently adjust the top panel (P1) sideways in either direction until XX and YY are equal.

Holding it in place, fix 6 x back panel connectors (H7) to assembled unit with 6 x screws (H6) as shown, using a phillips head screwdriver.



Step 11

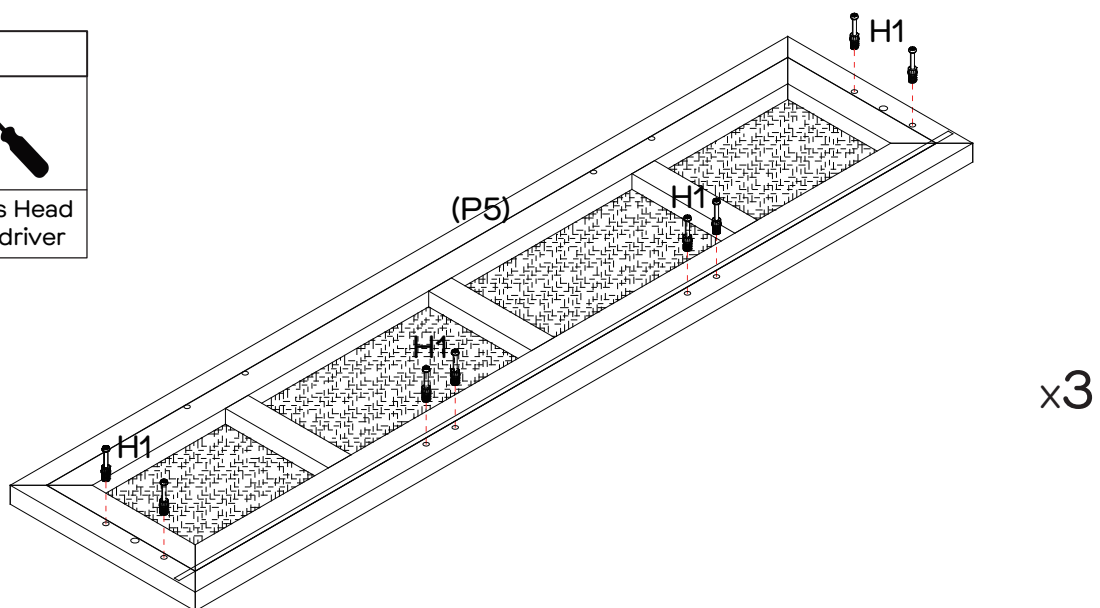
You will need	
	
24 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 8 x cam bolts (H1) each into drawer front (P5), using a phillips head screwdriver.



Step 12

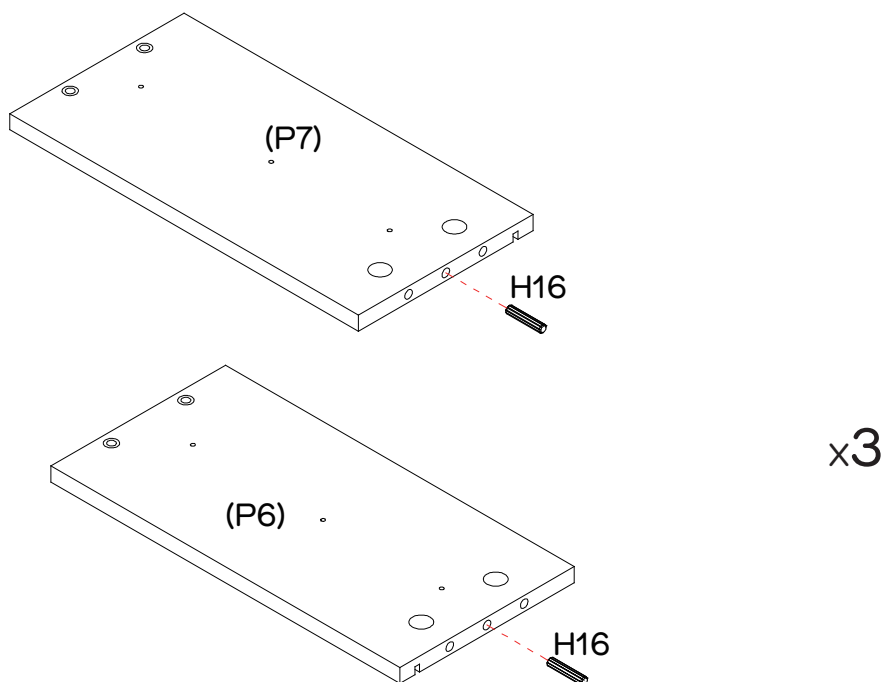
You will need	
	
6 x Dowels ø6mm (H16)	Mallet



Insert 1 x dowel (H16) into each side panel (P7, P6) as shown.
if needed use a mallet to gently tap the dowels into place.

Step 13

You will need	
	
24 x Small Cam Nuts (H15)	Flat Head Screwdriver

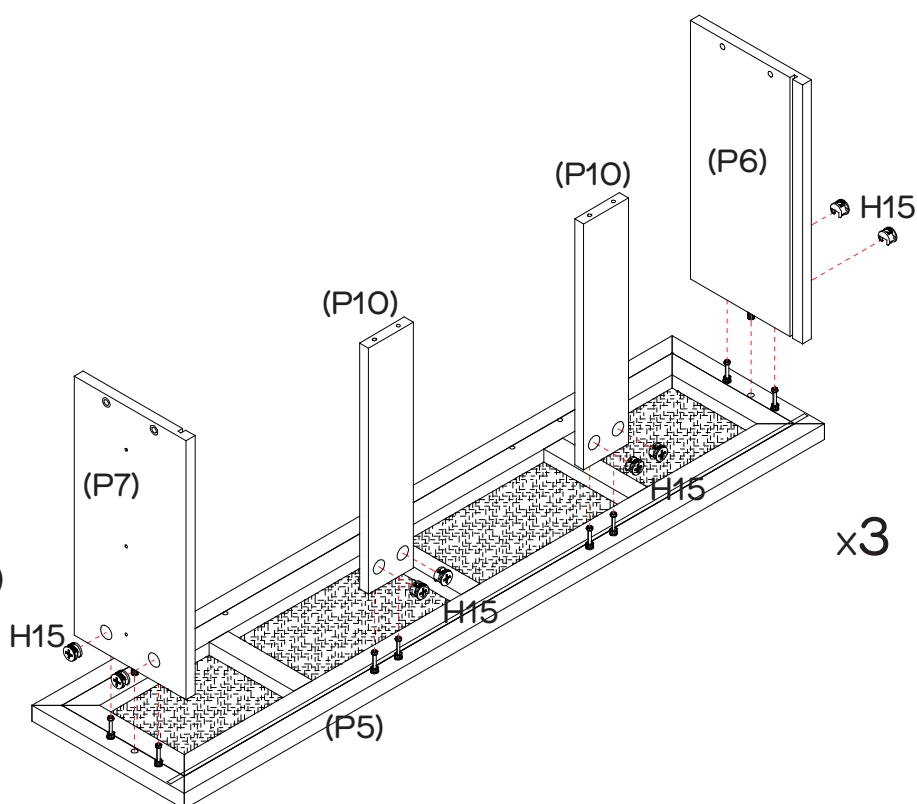

Position 1 x drawer left side (P6)
and 1 x drawer right side (P7)
and 2 x drawer supports (P10)
onto drawer front (P5).

Ensure the grooves on each of
the panels (P5, P6, P7) align.


Insert 8 x small cam nuts (H15)

into drawer sides (P6, P7) and drawer supports (P10 x2).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.



Using a flat head screwdriver turn clockwise to lock.

Step 14

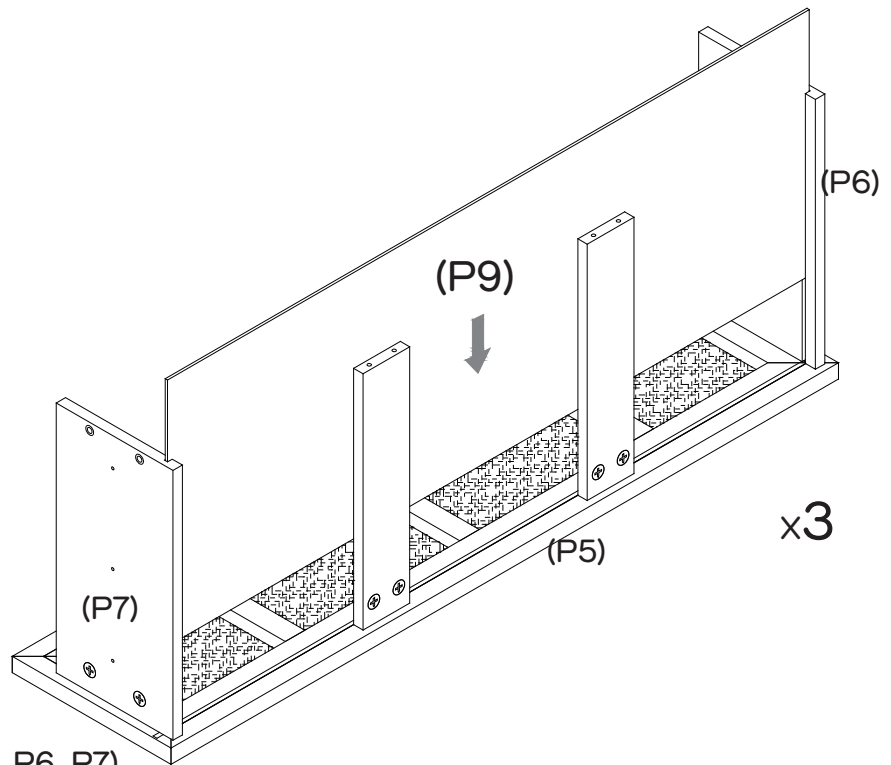


Slide drawer base (P9)
into the grooves on panels (P5, P6, P7).
Repeat this step for the other 2 x drawer assembly.

Step 15




You will need	
	
24 x Screws 38mm (H17)	Phillips Head Screwdriver

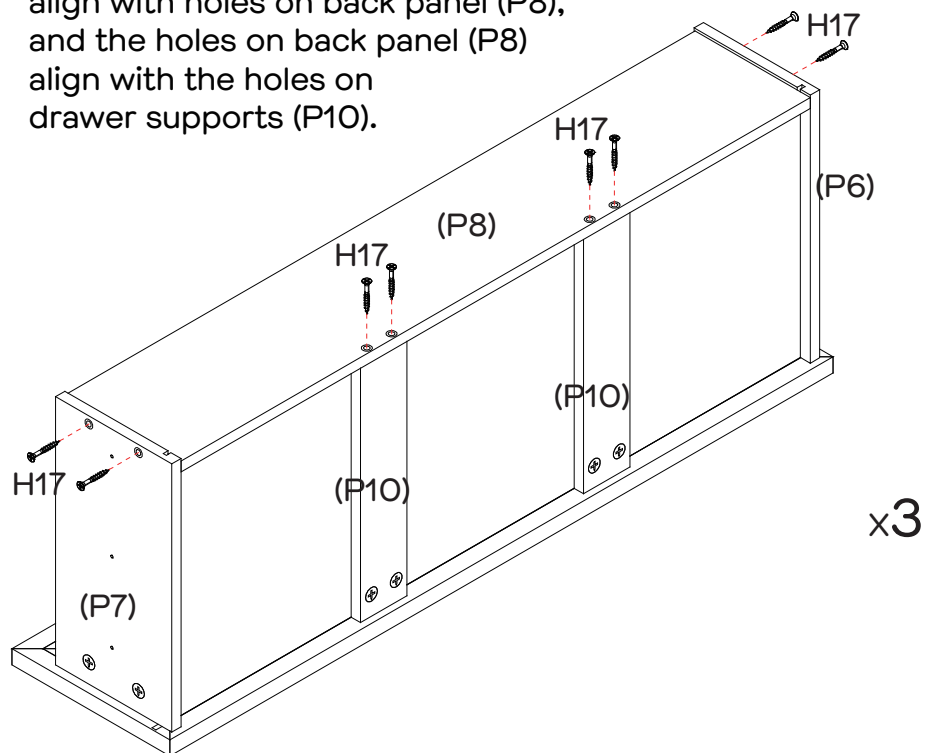Ensure the pre-drilled holes on drawer side panels (P7, P6)
align with holes on back panel (P8),
and the holes on back panel (P8)
align with the holes on
drawer supports (P10).





Attach drawer back (P8) onto an assembled drawer with 8 x screws (H17),
using a phillips head screwdriver as shown.
Repeat this step for the other 2 x drawer assembly.

Step 16




You will need	
	
6 x Slide Runners (H19-2)	18 x Screws 12mm (H18)
	
Phillips Head Screwdriver	

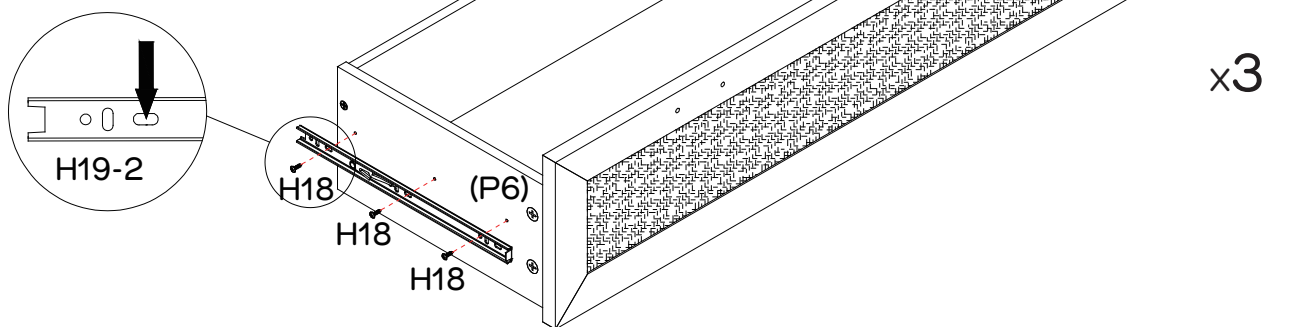
Please fasten the screws through these holes for this step.



Attach 1 x slide runner (H19-2) to each drawer left side (P6) and drawer right side (P7) with 3 x screws (H18), using a phillips head screwdriver as shown. Repeat this step for the other 2 x drawer assembly.




Step 17

You will need	
	
12 x Screws 28mm (H11)	6 x Handles (H4)
	
Phillips Head Screwdriver	

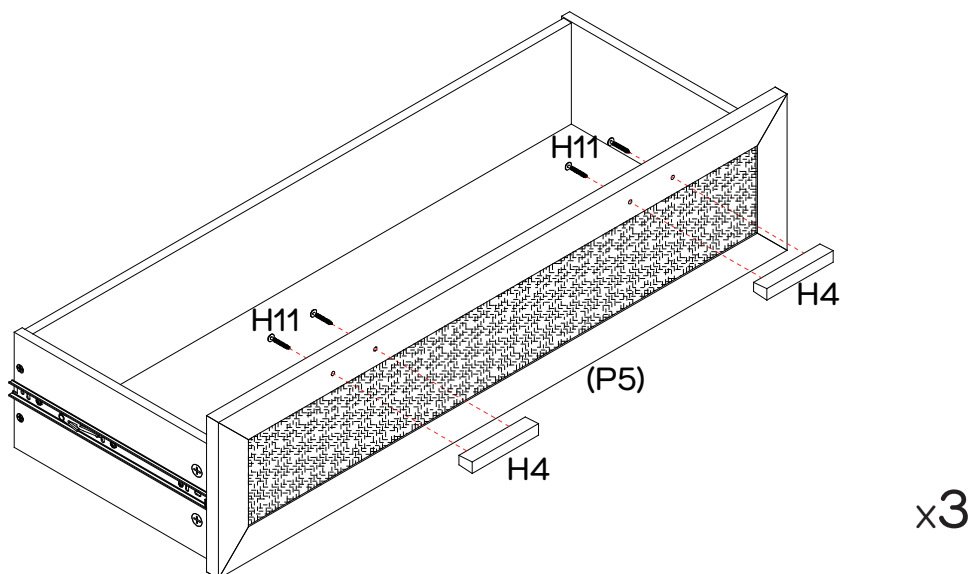


Attach 2 x handles (H4) onto a drawer front (P5) with 4 x screws (H11), using a phillips head screwdriver as shown. Repeat this step for the other 2 x drawer assembly.


Step 18

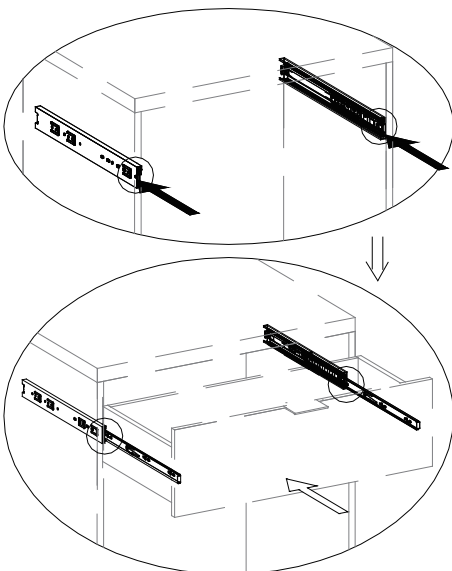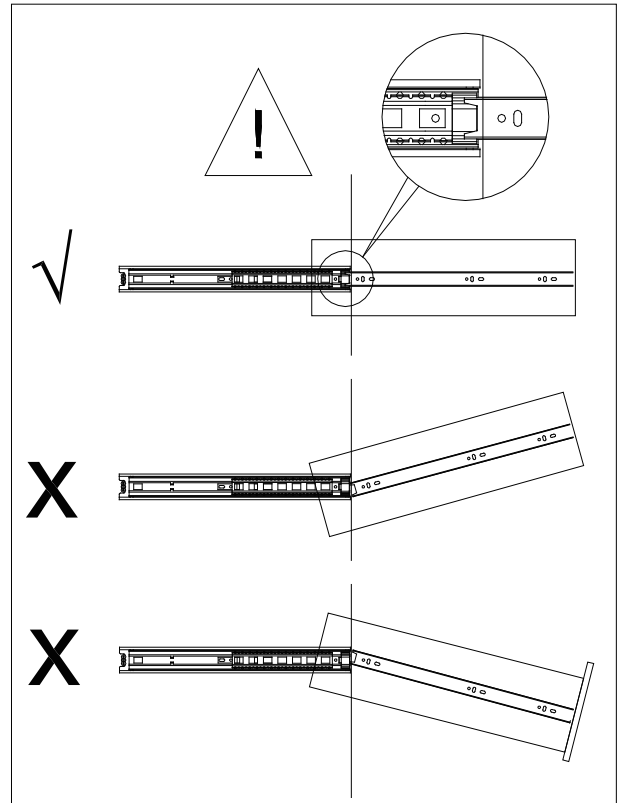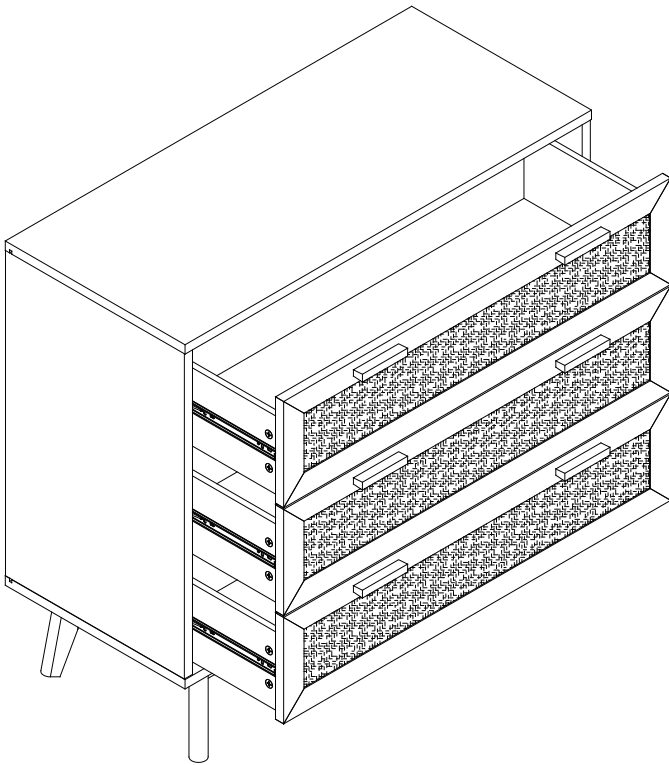

Move inner ball bearing track to front of slide track (H19-1).







Gently insert drawer slide runner (H19-2) in between the ball bearing track.

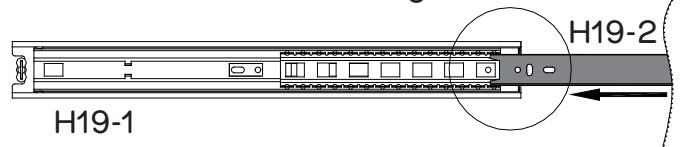


Position drawer so that slide runners (H19-2) align with slide tracks (H19-1) as shown. Gently push drawer into the closed position.

Step 19



We strongly recommend that this product is permanently fixed to the wall or other suitable surface.

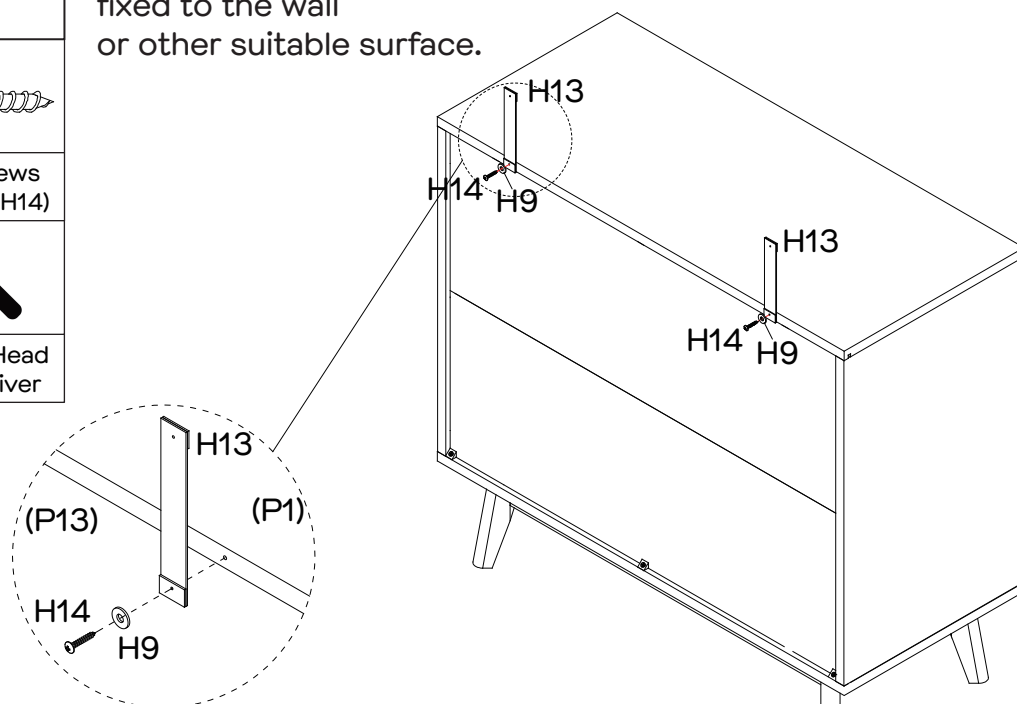You will need	
	
2 x Flat Washers (H9)	2 x Screws 25mm (H14)
	
2 x Wall Straps (H13)	Phillips Head Screwdriver




Fix 2 x wall straps (H13) to top panel (P1) with 2 x screws (H14) and 2 x flat washers (H9) as shown, using a phillips head screwdriver.

Step 20

You will need	
	
2 x Flat Washer (H9)	Phillips Head Screwdriver


Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

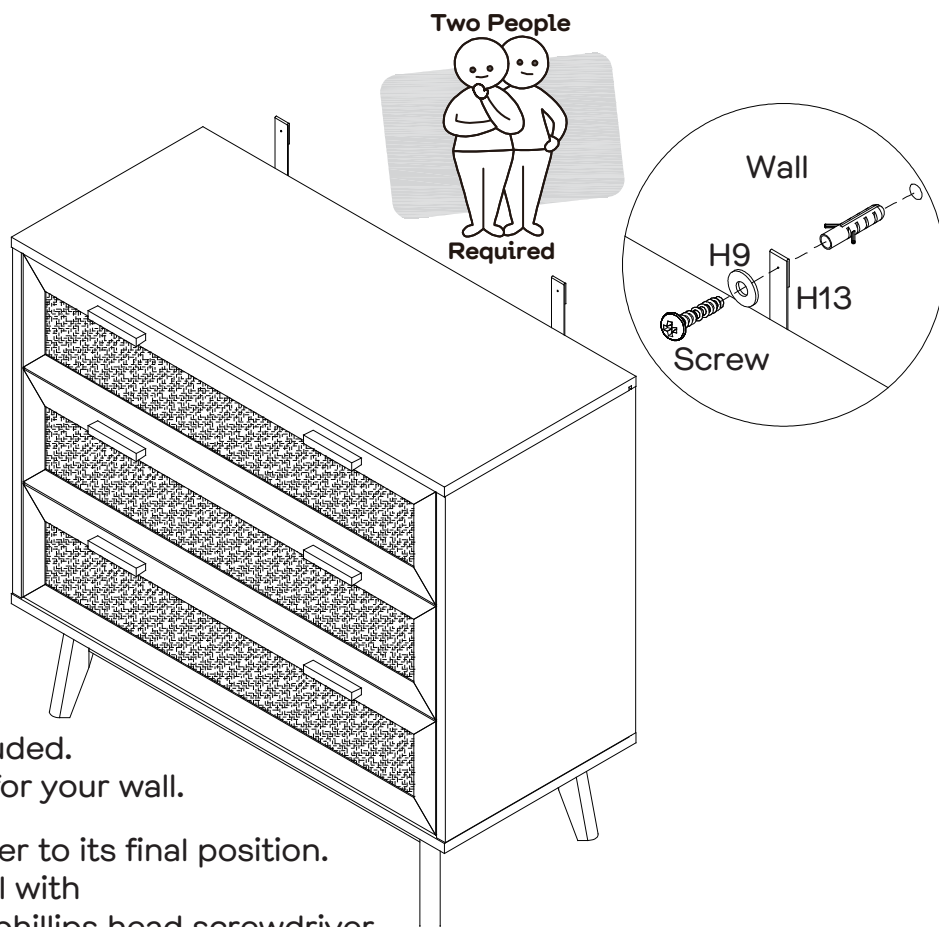

Screw and wall plug are not included. Please use appropriate fixtures for your wall.

With assistance, move the dresser to its final position. Attach the wall straps to the wall with the appropriate fixtures using a phillips head screwdriver. Make sure they are firmly attached and secure.

Step 21

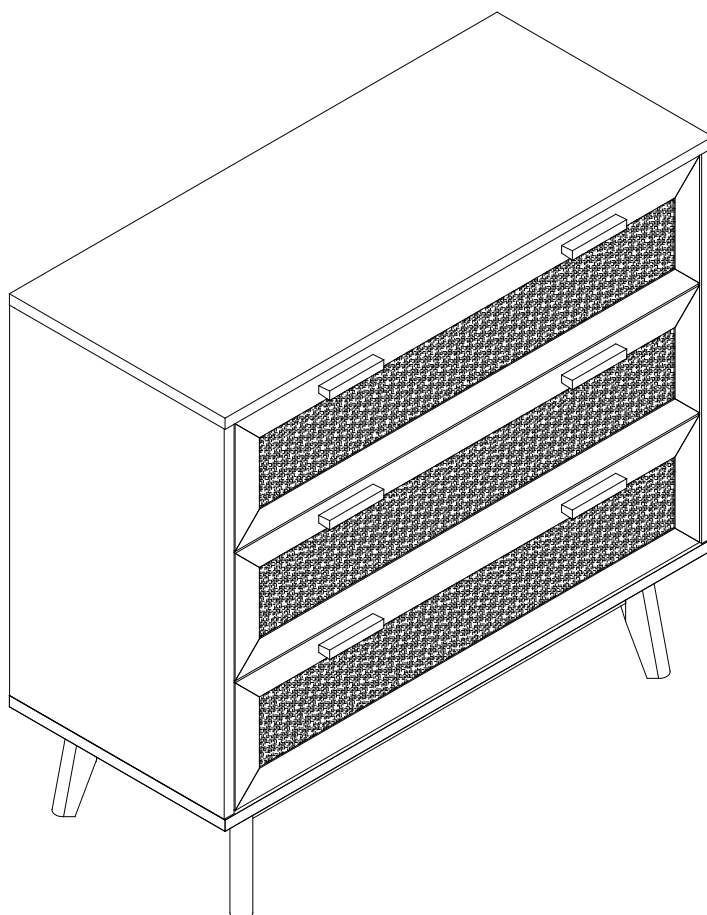


Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.



**Fantastic
Furniture**

Version 1.0

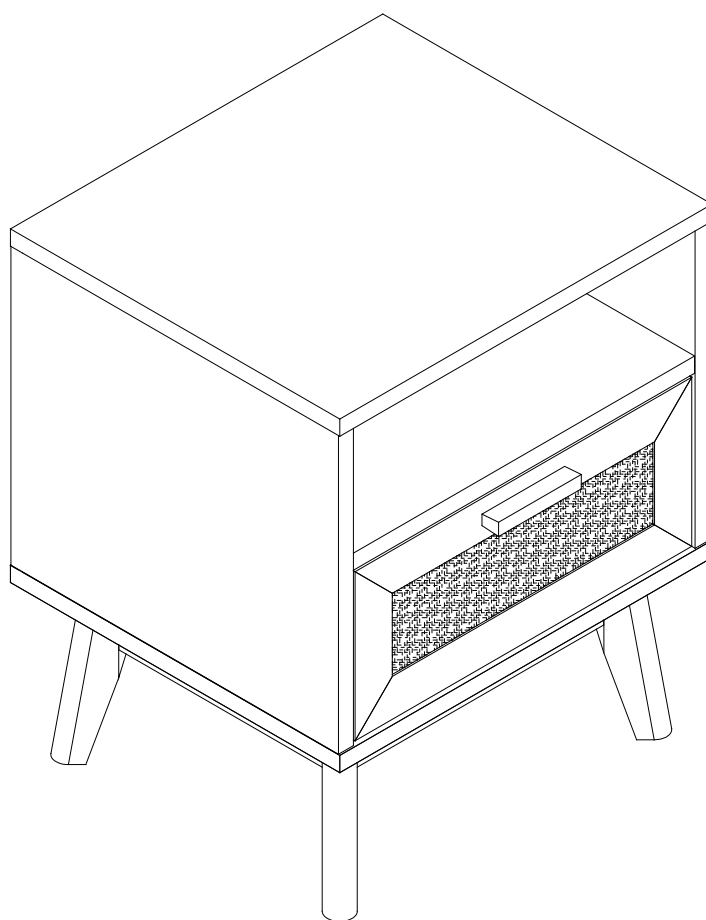

Two People



Required

Java
Bedside 1 Drawer
fantasticfurniture.com.au



Warning: Ensure the wall strap is attached to avoid serious injury

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Rattan

Rattan is a natural material that will respond to humidity in the environment. Low humidity may cause the rattan to shrink. High humidity may cause the rattan to absorb moisture and expand, causing the weaving to look loose and wavy.

This is a natural phenomenon and not a defect.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

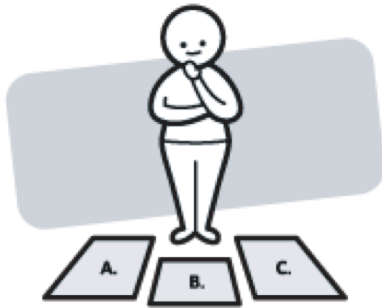

Identify and lay out all of the components before you begin assembly.

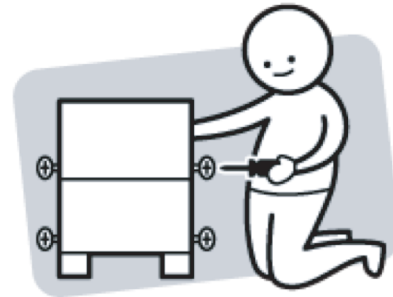

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Other tools you need


Flat Head Screwdriver;
Phillips Head Screwdriver;
Mallet

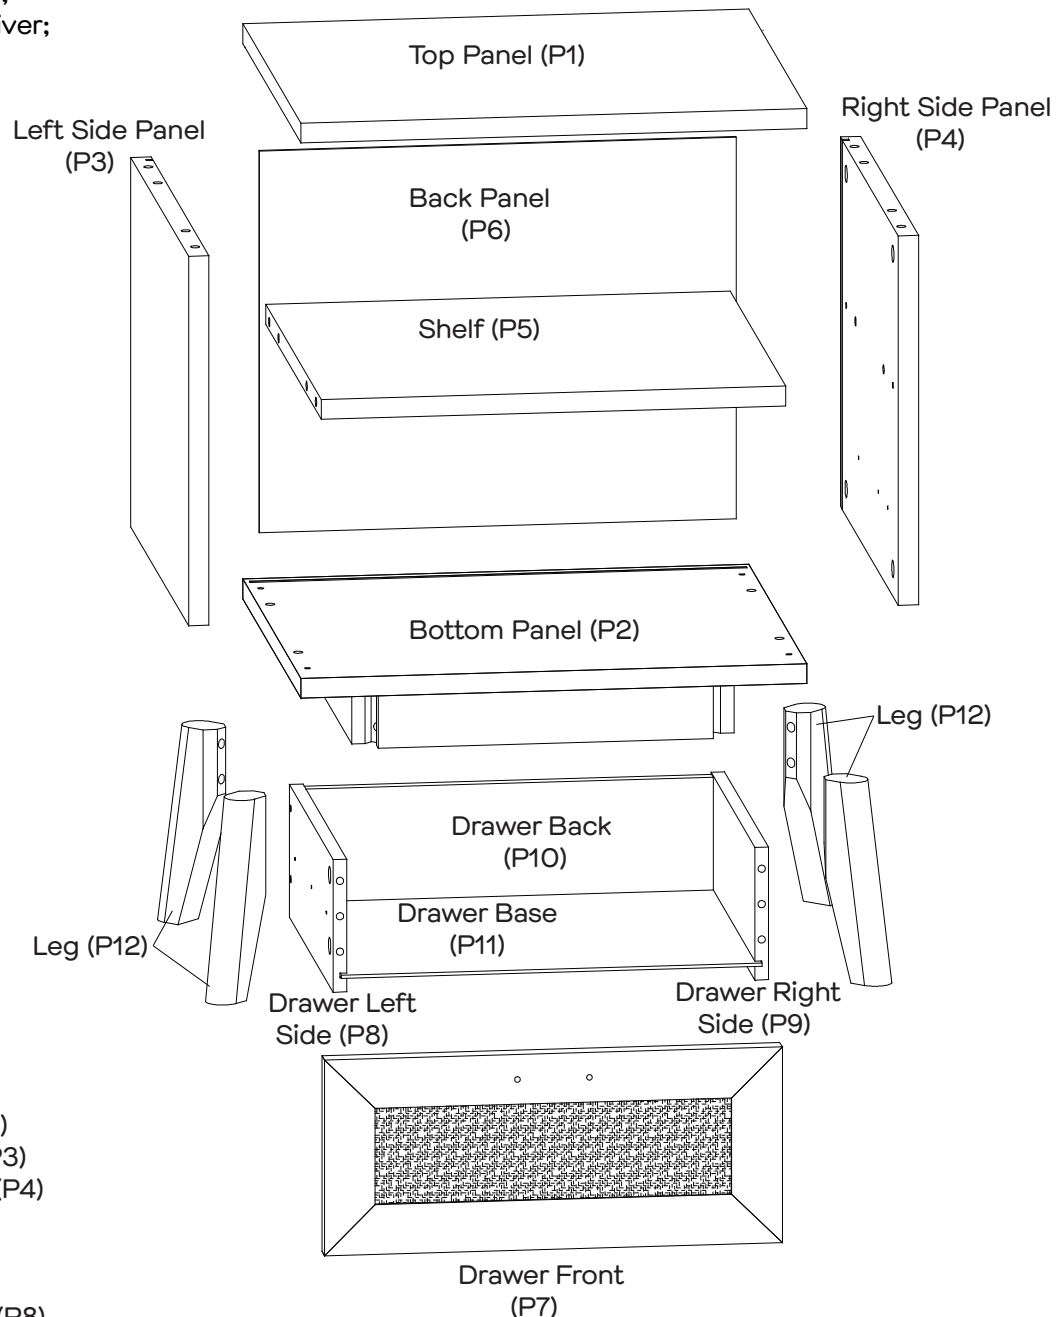

Parts list

- 1 x Top Panel (P1)
- 1 x Bottom Panel (P2)
- 1 x Left Side Panel (P3)
- 1 x Right Side Panel (P4)
- 1 x Shelf (P5)
- 1 x Back Panel (P6)
- 1 x Drawer Front (P7)
- 1 x Drawer Left Side (P8)
- 1 x Drawer Right Side (P9)
- 1 x Drawer Back (P10)
- 1 x Drawer Base (P11)
- 4 x Legs (P12)

Hardware Pack



16 x Cam Bolts
(H1)



12 x Large Cam
Nuts (H2)



12 x Dowels ø8mm
(H3)



1 x Handle
(H4)



4 x Felt Feet
(H5)



4 x Screws 16mm
(H6)



4 x Back Panel
Connectors (H7)




8 x Bolts
(H8)



10 x Flat Washers
(H9)




8 x Spring
Washers (H10)



2 x Screws 28mm
(H11)



1 x Allen Key
(H12)




1 x Wall Strap
(H13)




1 x Screw 25mm
(H14)



4 x Small Cam
Nuts (H15)



2 x Dowels ø6mm
(H16)



4 x Screws 38mm
(H17)




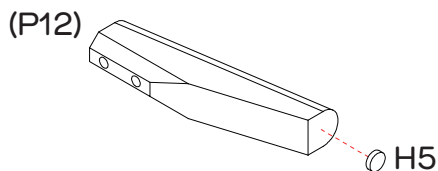
12 x Screws 12mm
(H18)



2 x Slides
(H19)

Step 1





You will need	
	
4 x Felt Feet (H5)	



x4

Attach 1 x felt foot (H5) onto each leg (P12) as shown.

Step 2


You will need	
	
8 x Bolts (H8)	8 x Flat Washers (H9)
	
8 x Spring Washers (H10)	1 x Allen Key (H12)

Attach 1 x leg (P12) onto bottom panel (P2), using 2 x bolts (H8), 2 x spring washers (H10) and 2 x flat washers (H9).



Tighten the bolt with allen key (H12).

Repeat this step for the other 3 x legs (P12).


Turn the assembled frame over.

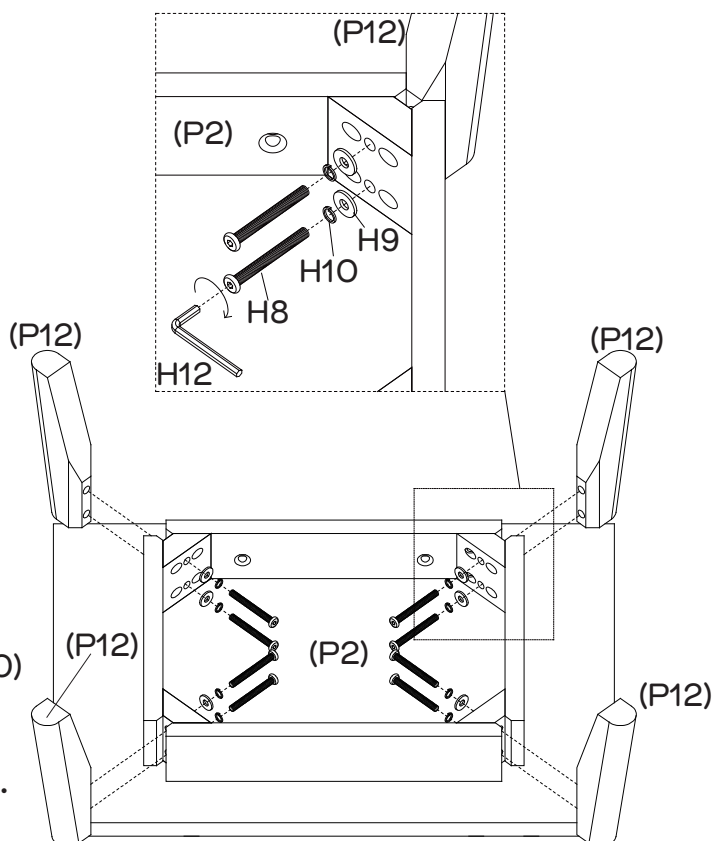







Step 3

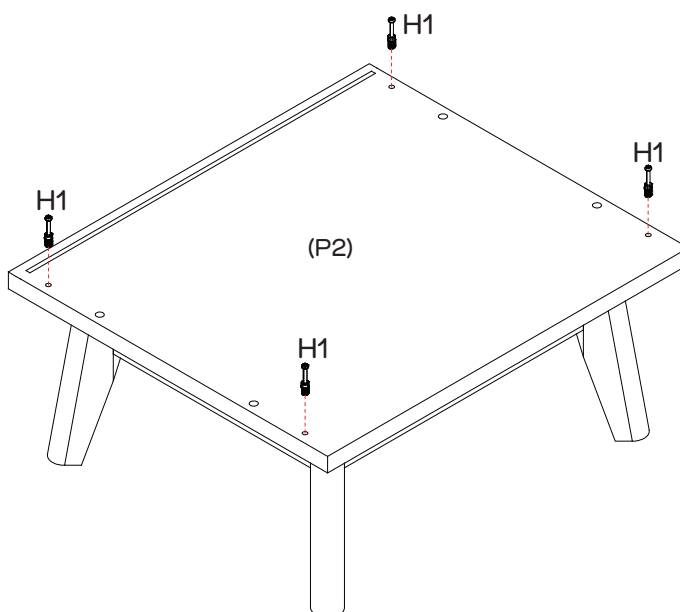You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver


Screw 4 x cam bolts (H1) into bottom panel (P2), using a phillips head screwdriver.




Step 4

You will need	
	
2 x Slides (H19)	6 x Screws 12mm (H18)
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver
	
8 x Dowels ø8mm (H3)	Mallet


Separate the 2 x slide runners (H19-2) and slide tracks (H19-1) from the slides (H19) by following the steps below:
 Extend the slide runner (H19-2) all the way out.
 Press down the plastic release lever on the slide and pull out the slide runner (H19-2) completely.

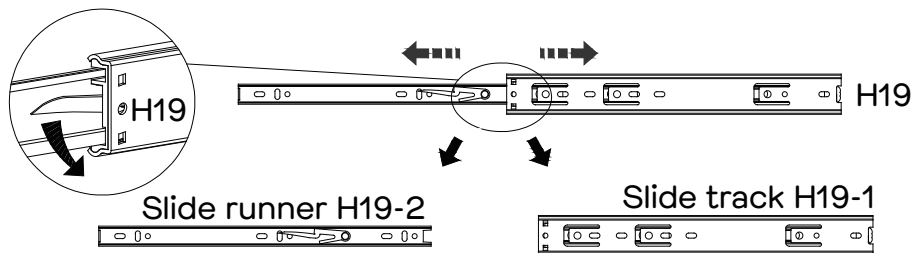



Adjust runner to access the screw holes.



Please fasten the screws through these holes for this step



Note the position of the rubber stopper

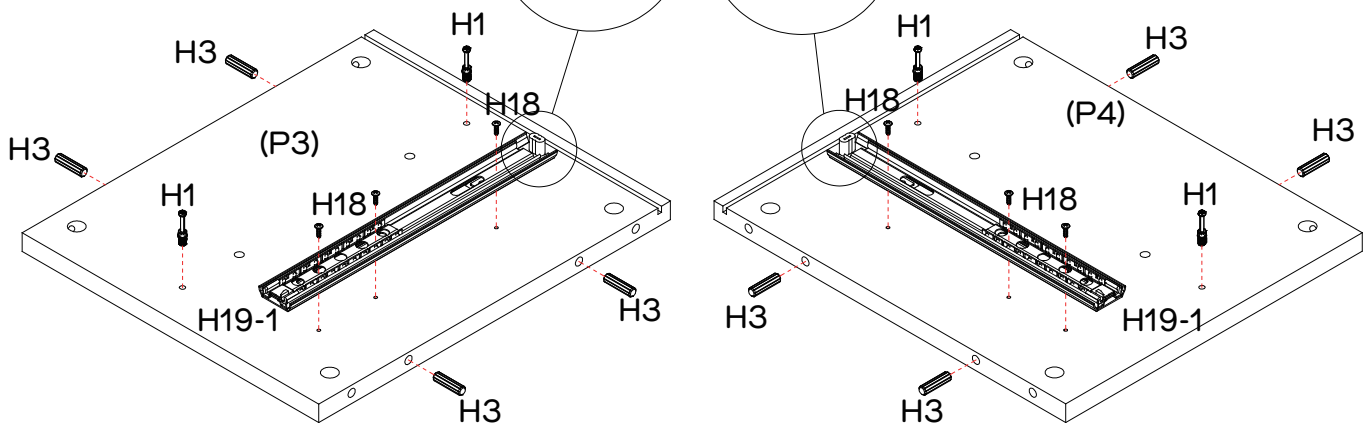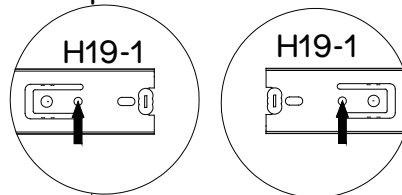

Attach 2 x separated slide tracks (H19-1) onto side panels (P3, P4) with 6 x screws (H18), using a phillips head screwdriver as shown.



Ensure the slide tracks (H19-1) are attached so the rubber stopper is near the grooves on side panels.


Screw 4 x cam bolts (H1) into side panels (P3, P4), using a phillips head screwdriver as shown.

Insert 4 x dowels (H3) into the left side panel (P3) and 4 x dowels (H3) into the right side panel (P4).

If needed use a mallet to gently tap the dowels into place.



Step 5

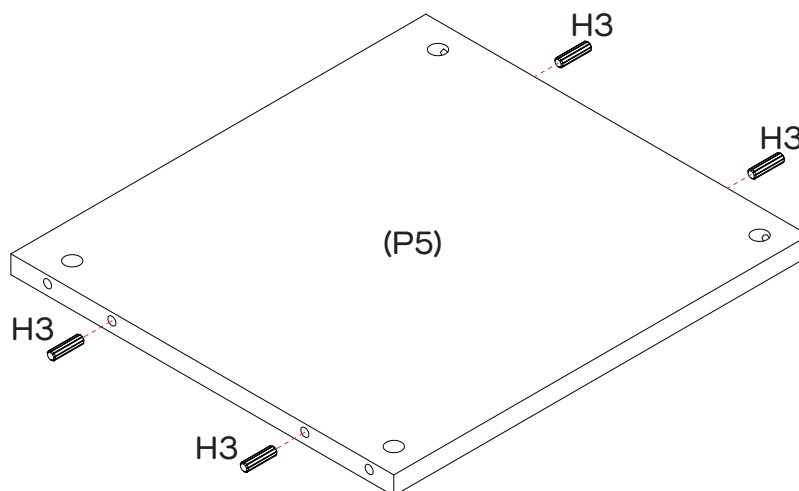You will need	
	
4 x Dowels ø8mm (H3)	Mallet




Insert 4 x dowels (H3) into shelf (P5) as shown.
Use a mallet to gently tap the dowels into place if needed.


Step 6

You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver

This is how a cam nut works.....



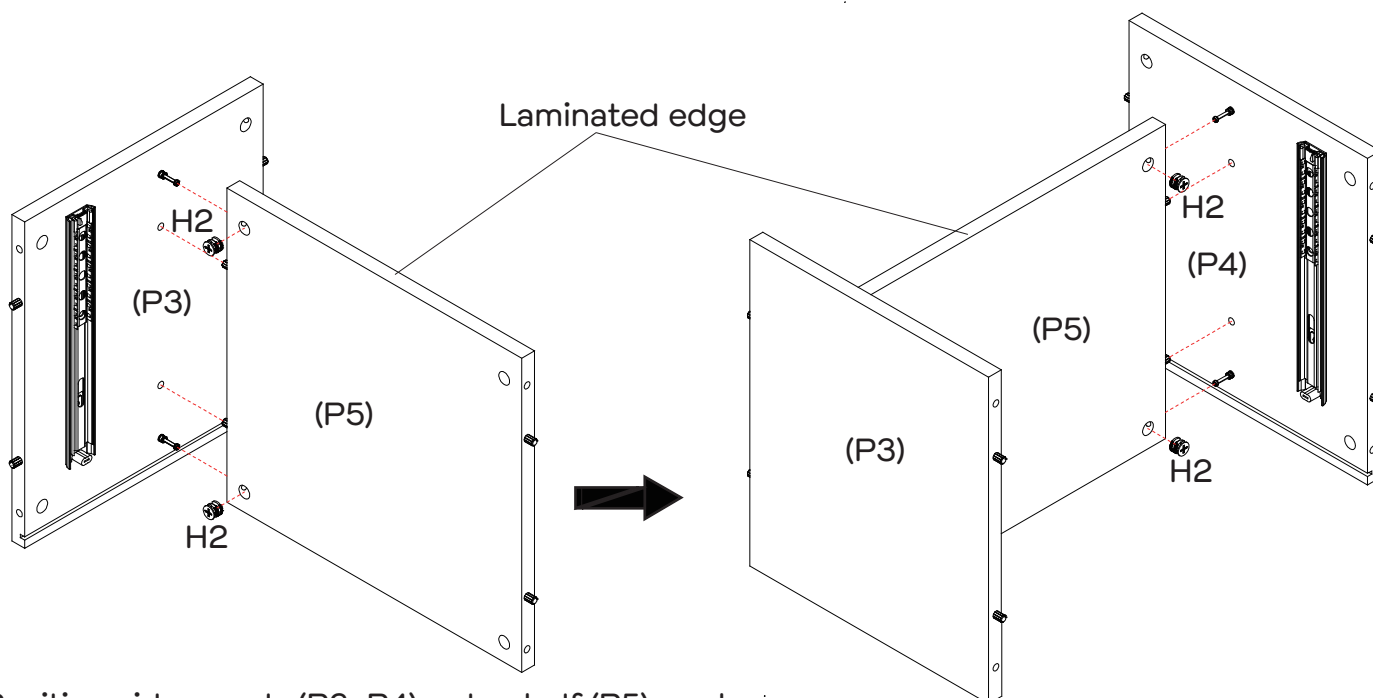


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Position side panels (P3, P4) onto shelf (P5) as shown.
Insert 4 x large cam nuts (H2) into shelf (P5).
Rotate the cam nuts so the arrow faces incoming cam bolts.
Using a flat head screwdriver turn clockwise to lock.

Step 7


You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver

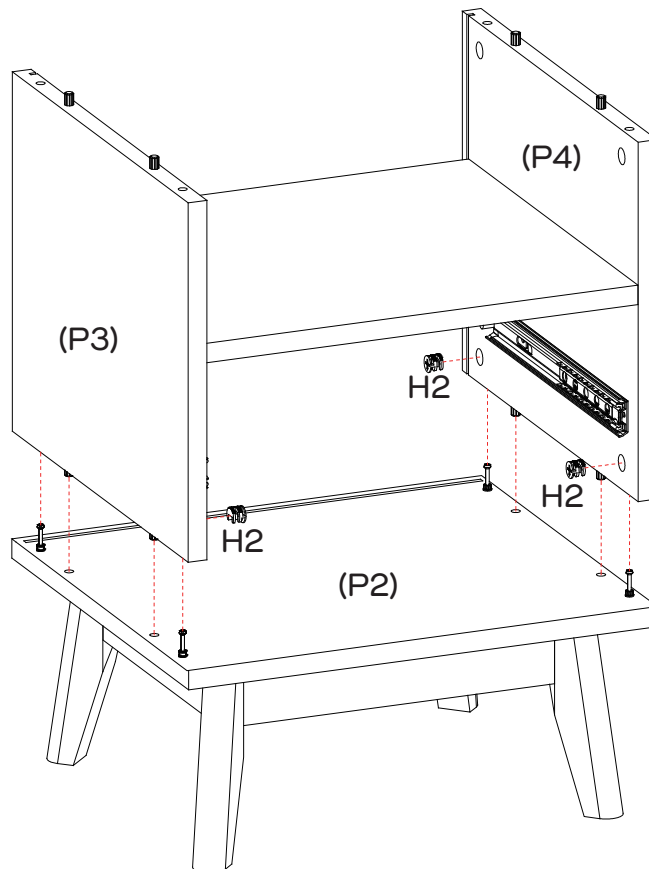

Position side panels (P3, P4) onto bottom panel (P2) as shown.



Insert 4 x large cam nuts (H2) into side panels (P3, P4). Rotate the cam nuts so the arrow faces incoming cam bolts. Using a flat head screwdriver turn clockwise to lock.


Step 8

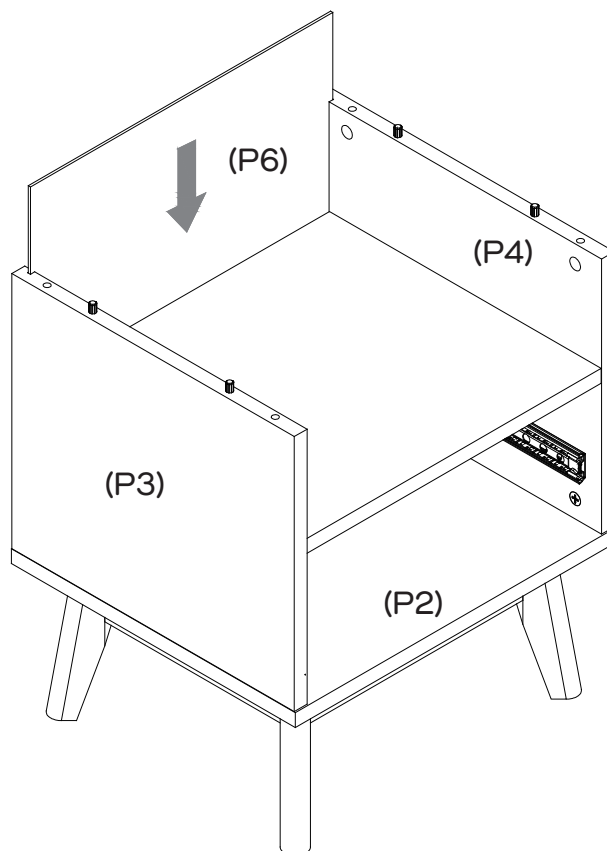

Slide back panel (P6) into the grooves of the side panels (P3, P4) and bottom panel (P2).



Step 9

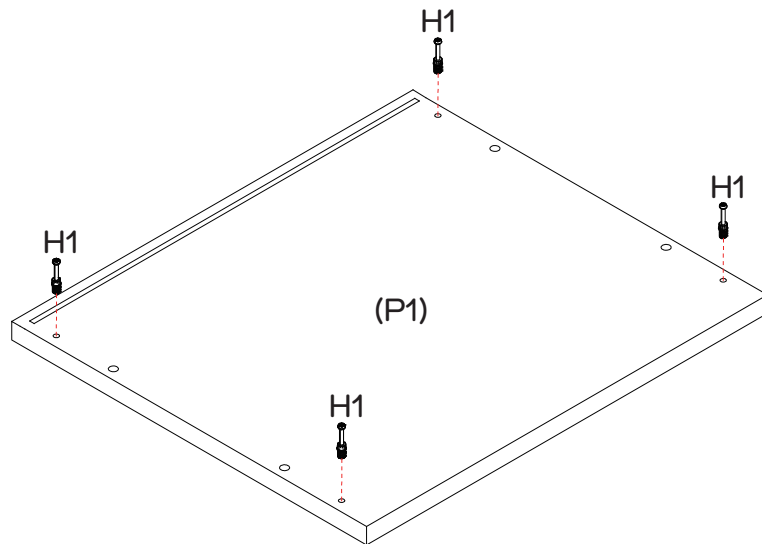
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 4 x cam bolts (H1) into top panel (P1), using a phillips head screwdriver.




Step 10


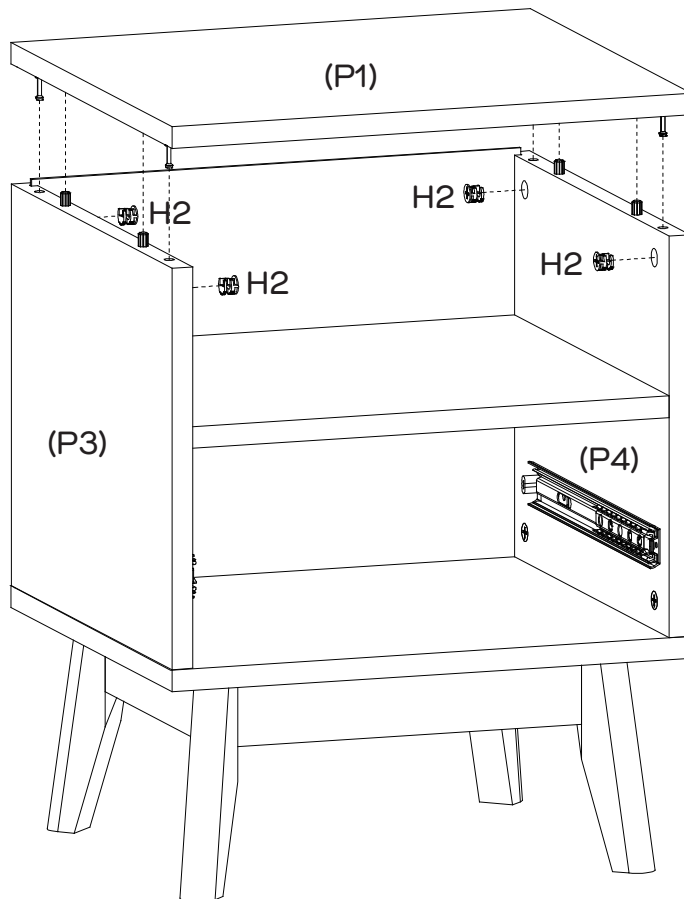
You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver



Position top panel (P1) onto assembled unit as shown.
 Insert 4 x large cam nuts (H2) into panels (P3, P4).
 Rotate the cam nuts so the arrow faces incoming cam bolts.
 Using a flat head screwdriver turn clockwise to lock.

Step 11



You will need	
	
4 x Screws 16mm (H6)	4 x Back Panel Connectors (H7)
	
Phillips Head Screwdriver	

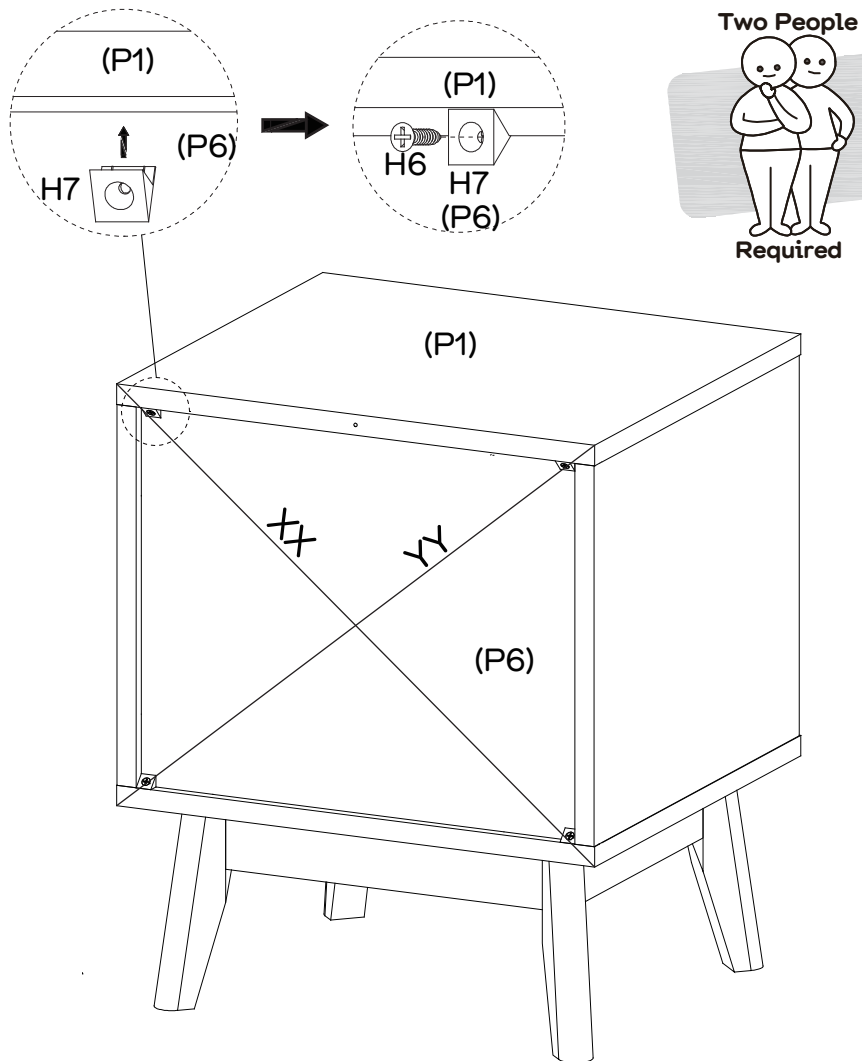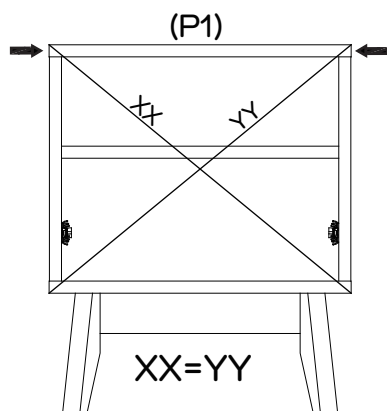


If necessary, gently adjust the top panel (P1) sideways in either direction until XX and YY are equal.

Holding it in place, fix 4 x back panel connectors (H7) to assembled unit with 4 x screws (H6) as shown, using a phillips head screwdriver as shown.



Step 12

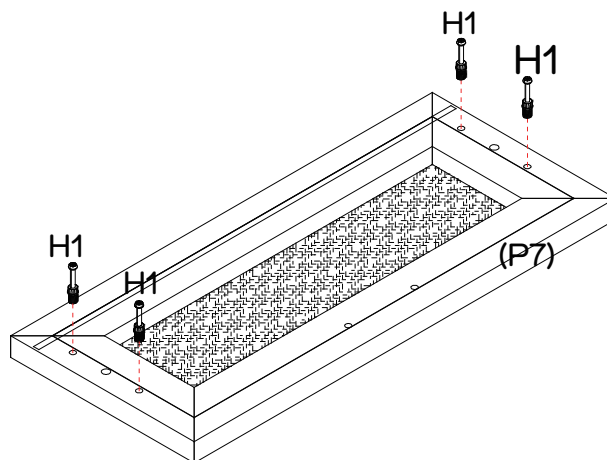
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 4 x cam bolts (H1) into drawer front (P7), using a phillips head screwdriver as shown.



Step 13

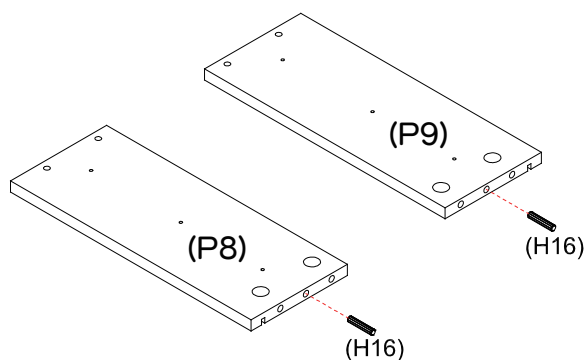
You will need	
	
2 x Dowels ø6mm (H16)	Mallet



Insert 2 x dowels (H16) into drawer side panels (P8, P9) as shown.
If needed use a mallet to gently tap the dowels into place.


Step 14

You will need	
	
4 x Small Cam Nuts (H15)	Flat Head Screwdriver

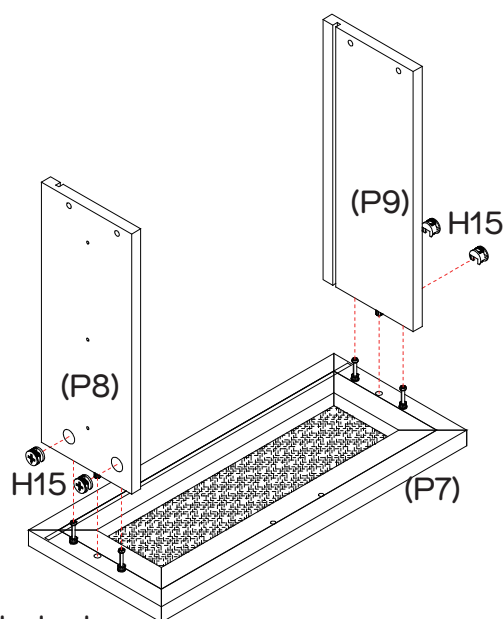

Position drawer sides (P8, P9) onto drawer front (P7).
Insert 4 x small cam nuts (H15) into drawer sides (P8, P9).
Rotate the cam nuts so the arrow faces incoming cam bolts.
Using a flat head screwdriver turn clockwise to lock.



Step 15

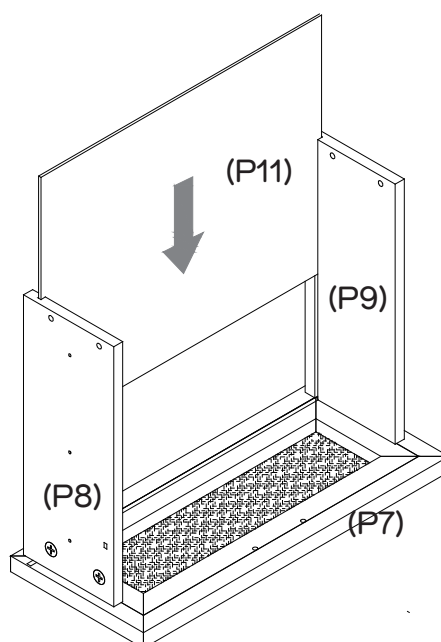


Slide drawer base (P11) into the grooves on panels (P7, P8, P9).

Step 16

Ensure the pre-drilled holes on drawer panels (P8, P9) align with the holes on (P10).




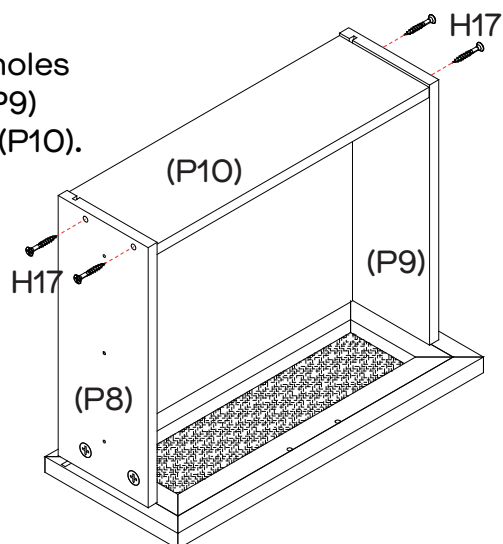You will need	
	
4 x Screws 38mm (H17)	Phillips Head Screwdriver




Attach drawer back (P10) to assembled drawer with 4 x screws (H17), using a phillips head screwdriver as shown.

Step 17




Please fasten the screws through these holes for this step.

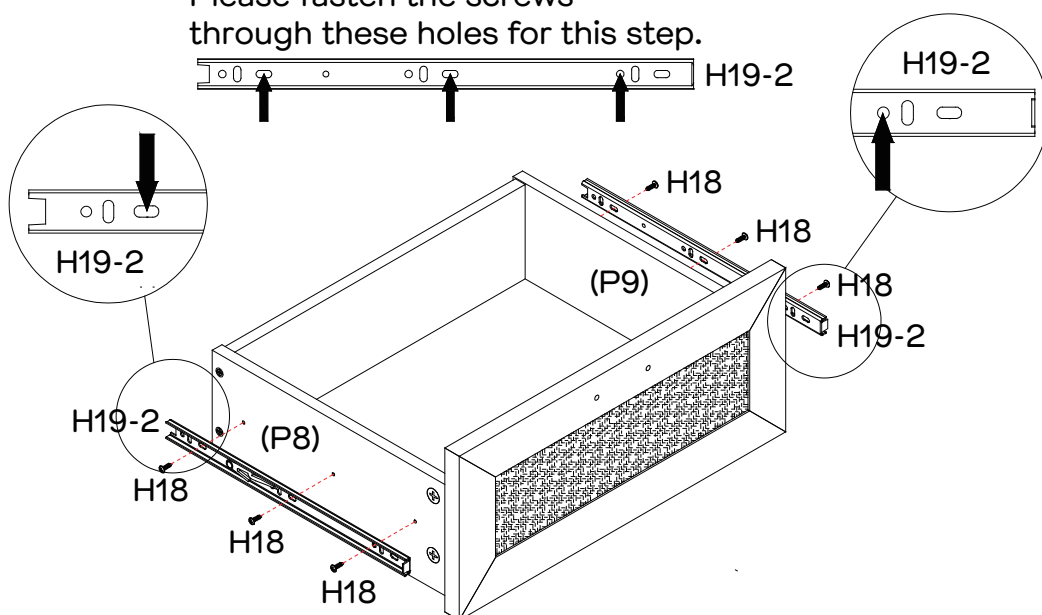
You will need	
	
2 x Slide Runners (H19-2)	6 x Screws 12mm (H18)
	
Phillips Head Screwdriver	



Attach 1 x slide runner (H19-2) to each drawer side (P8, P9) with 3 x screws (H18), using a phillips head screwdriver as shown.




Step 18

You will need	
	
2 x Screws 28mm (H11)	1 x Handle (H4)
	
Phillips Head Screwdriver	

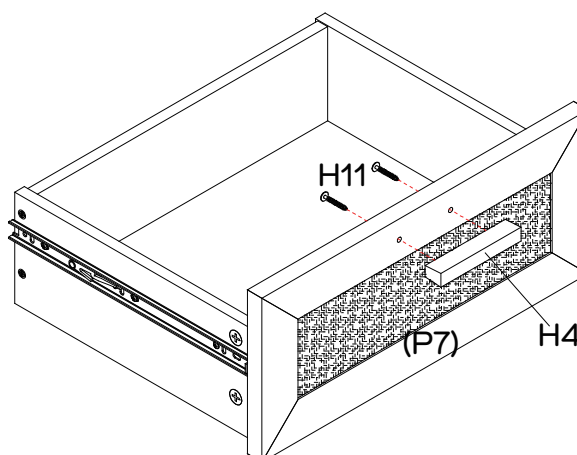


Attach 1 x handle (H4) onto drawer front (P7) with 2 x screws (H11), using a phillips head screwdriver as shown.


Step 19

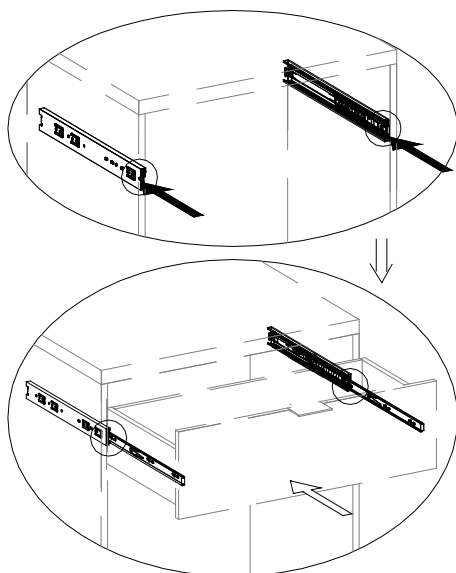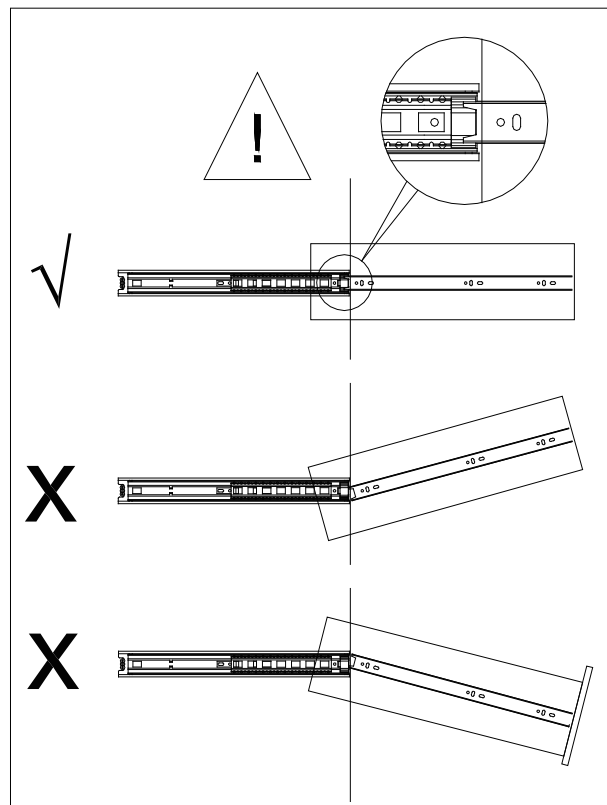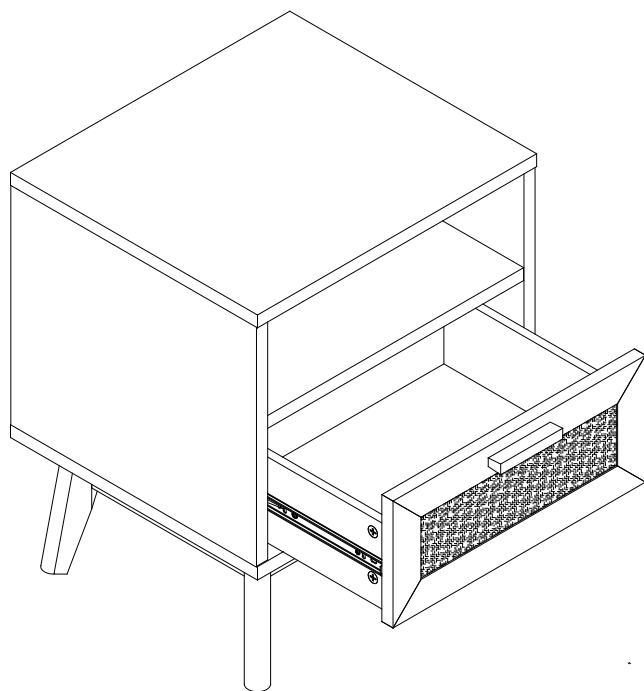

Move inner ball bearing track to front of slide track (H19-1).







Gently insert drawer slide runner (H19-2) in between the ball bearing tracks.

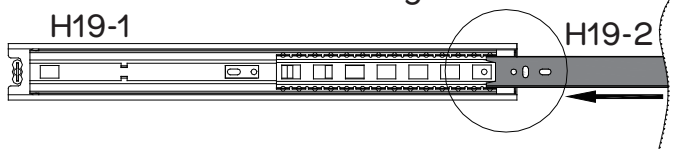


Position drawer so that slide runners (H19-2) align with slide tracks (H19-1) as shown. Gently push drawer into the closed position.

Step 20

We strongly recommend that this product is permanently fixed to the wall or other suitable surface.


You will need	
	
1 x Flat Washer (H9)	1 x Screw 25mm (H14)
	
1 x Wall Strap (H13)	Phillips Head Screwdriver

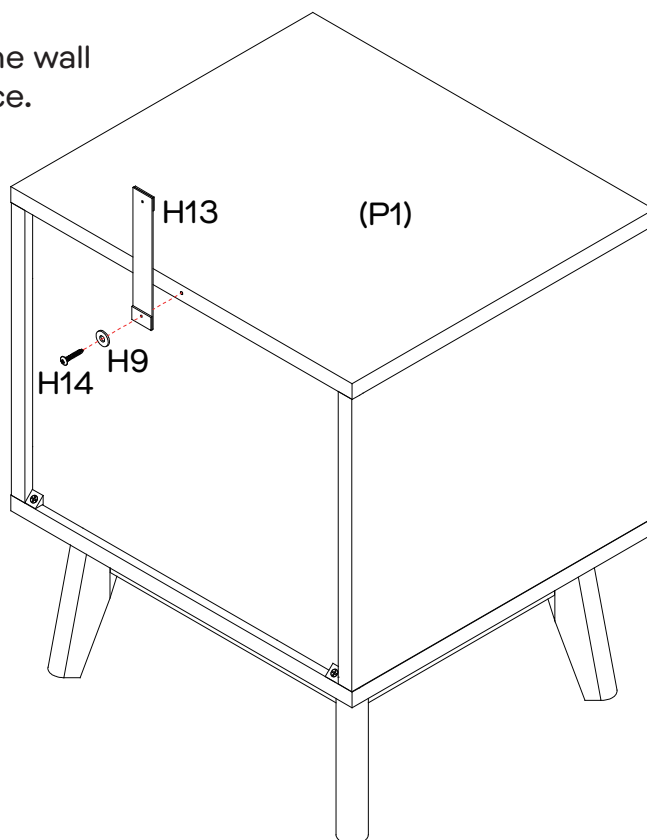



Fix 1 x wall strap (H13) to top panel (P1) with 1 x screw (H14) and 1 x flat washer (H9) as shown, using a phillips head screwdriver.

Step 21



Two People



Required


You will need	
	
1 x Flat Washer (H9)	Phillips Head Screwdriver

Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

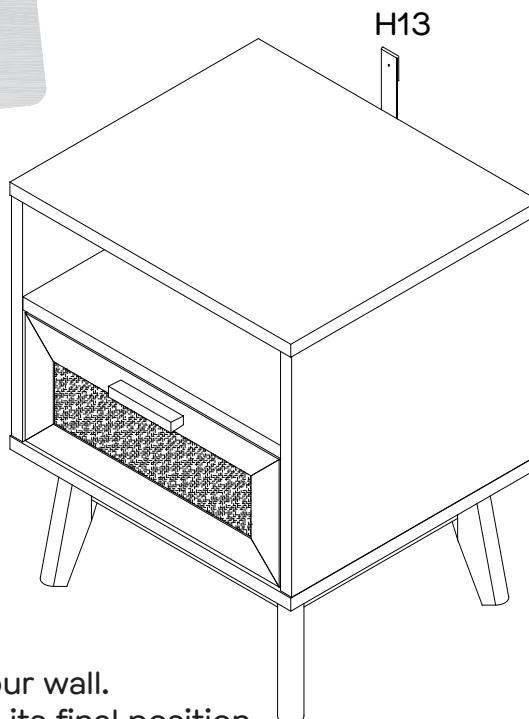

Screw and wall plug are not included.
Please use appropriate fixtures for your wall.
With assistance, move the bedside to its final position.
Attach the wall strap to the wall.
Make sure it is firmly attached and secure.

Step 22

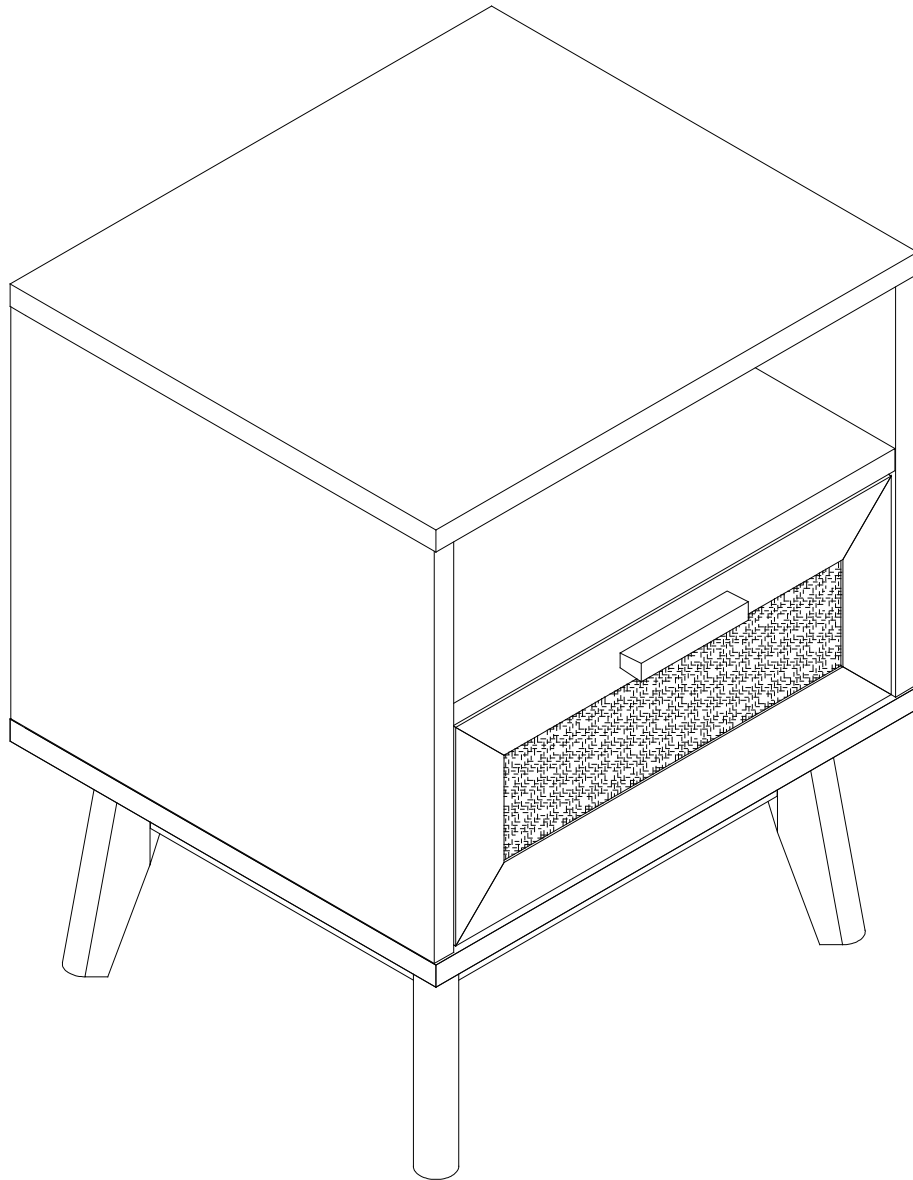

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.