




Version 1.0



TWO PEOPLE

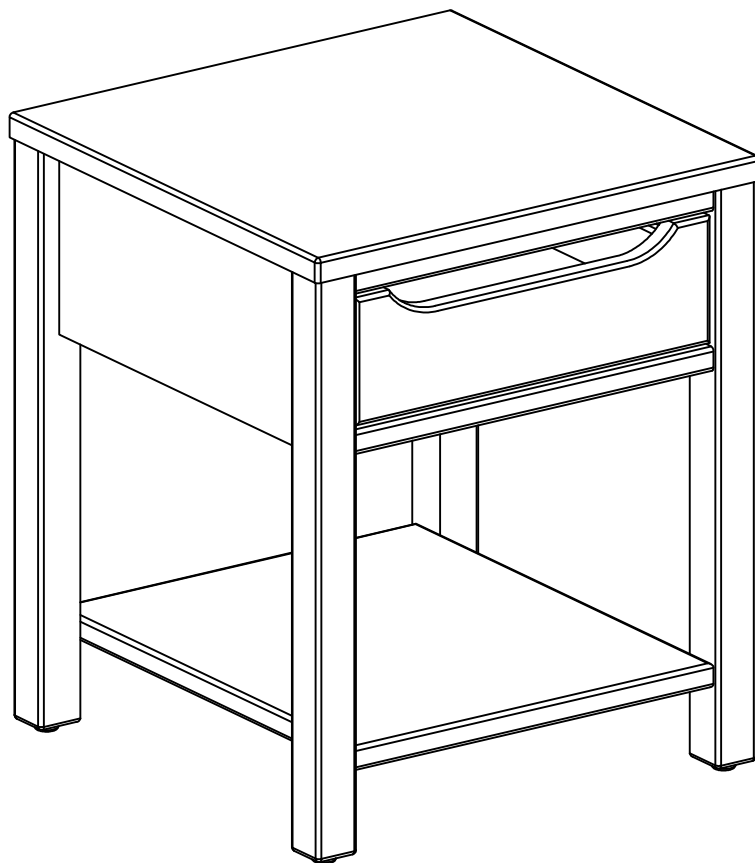

REQUIRED

Cooper

Bedside 1 Drawer

www.fantasticfurniture.com.au

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools.
Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What You Need

To Assemble the Product





Other Tools You Need
Phillips Head Screwdriver


Part List


Box 1:

- 1 x Top Panel (P1);
- 1 x Left Side Panel (P2);
- 1 x Right Side Panel (P3);
- 1 x Top Panel Rail (P4);
- 1 x Front Rail (P5);
- 1 x Shelf (P6);
- 1 x Back Panel (P7);
- 1 x Drawer Front (P8);
- 1 x Left Drawer Side (P9);
- 1 x Right Drawer Side (P10);
- 1 x Drawer Back (P11);
- 1 x Drawer Base (P12);
- Hardware Pack

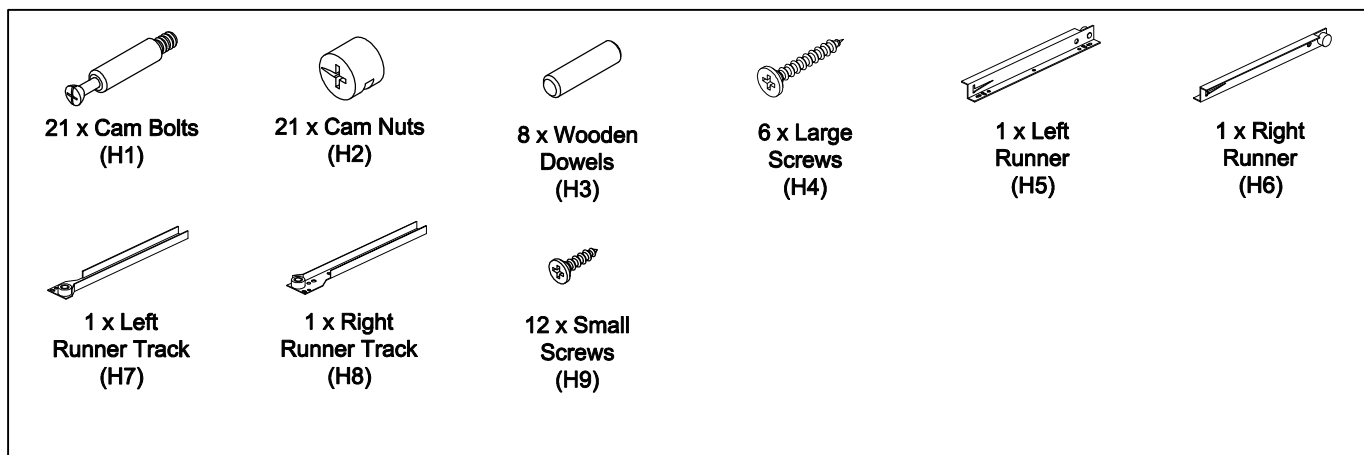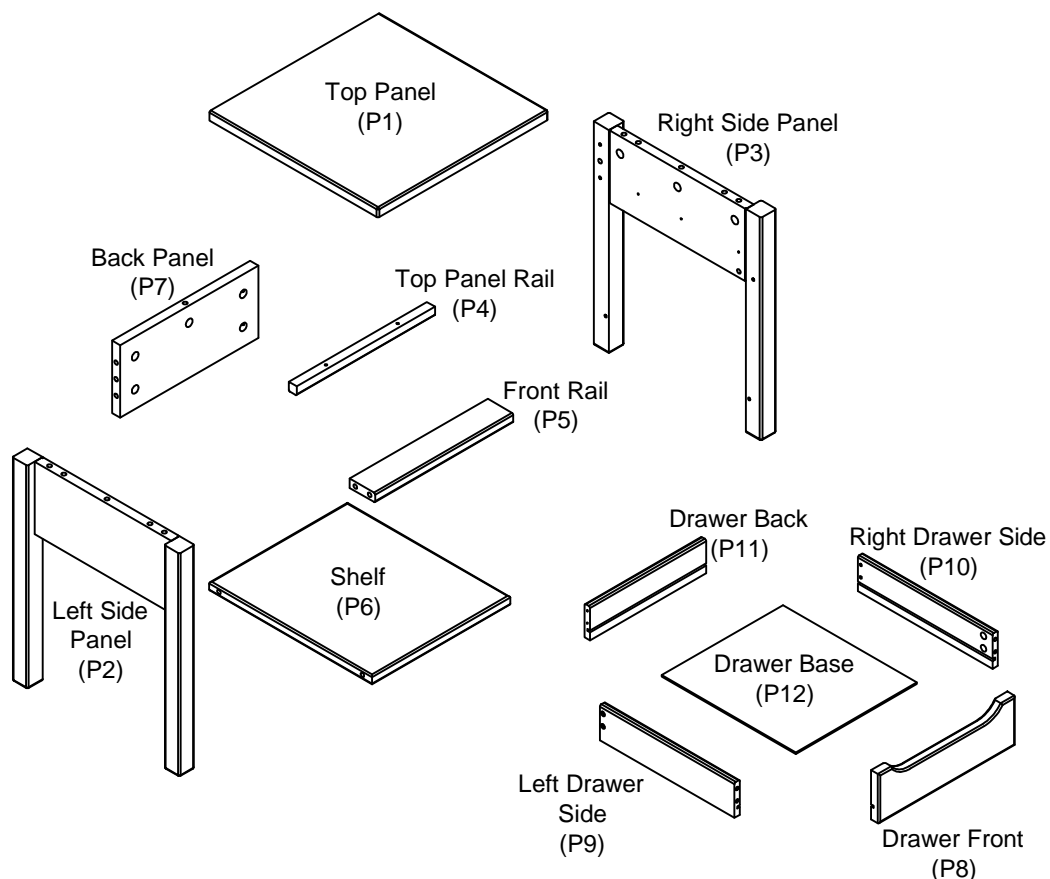




Step 1


You will need	
	
4 x Wooden Dowels (H3)	

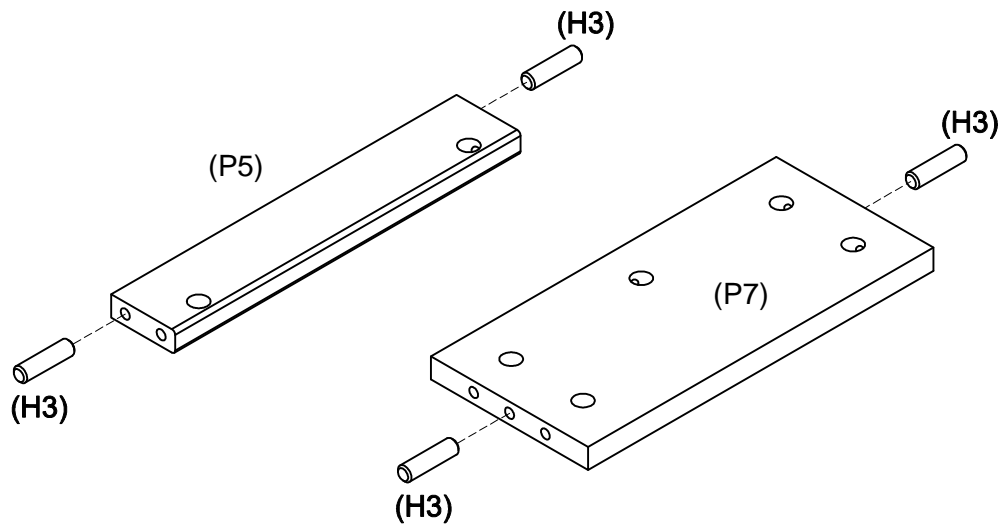

Insert 2 x wooden dowels (H3) into the front rail (P5).
Insert 2 x wooden dowels (H3) into the back panel (P7).

Step 2



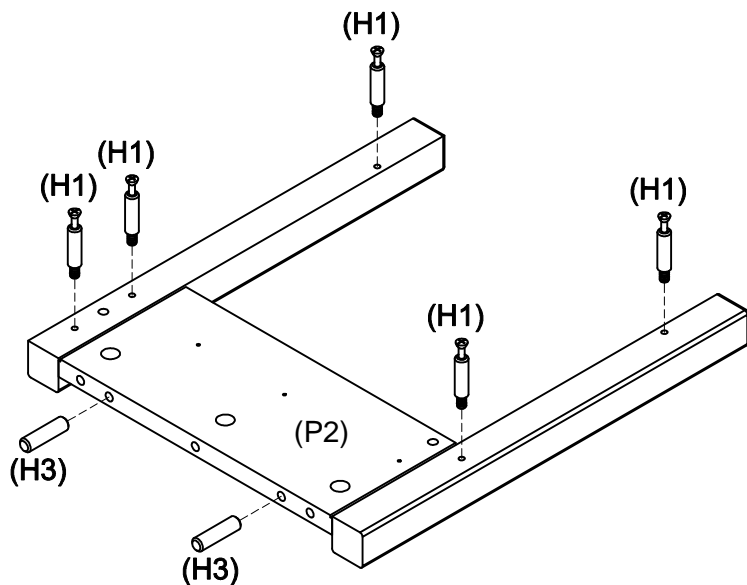You will need	
	
5 x Cam Bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	




Fix 5 x cam bolts (H1) to the left side panel (P2) by tightening with a phillips head screwdriver.

Insert 2 x wooden dowels (H3) into the left side panel (P2).




Step 3


You will need	
	
1 x Left Runner Track (H7)	Phillips head screwdriver
	
3 x Small Screws (H9)	

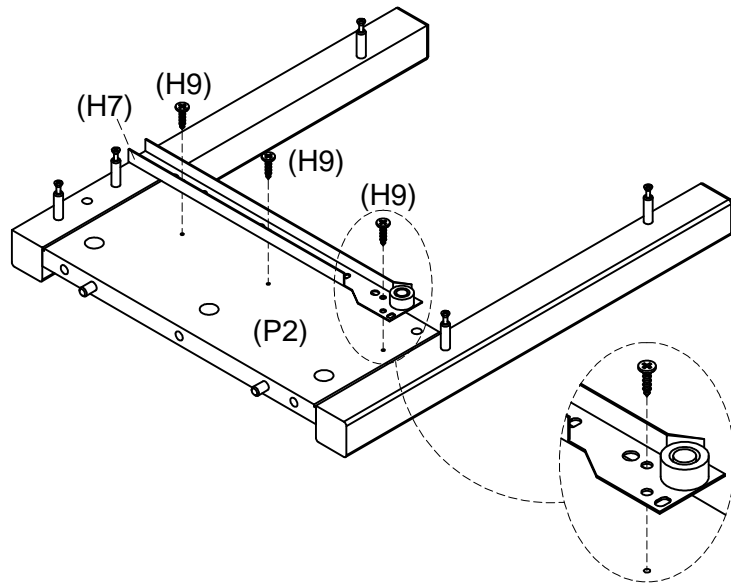

Fix the left runner track (H7) to the left side panel (P2) with 3 x small screws (H9) by tightening with a phillips head screwdriver.

Step 4



You will need	
	
5 x Cam Bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	

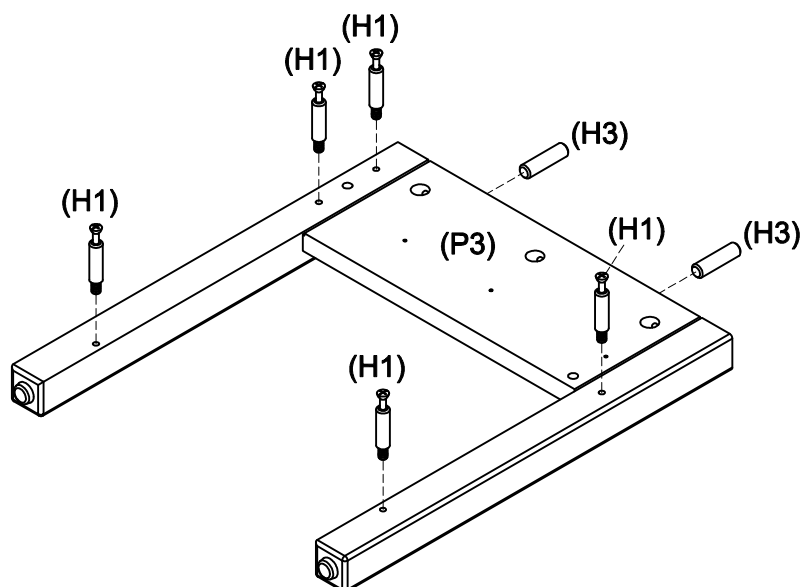


Fix 5 x cam bolts (H1) to the right side panel (P3) by tightening with a phillips head screwdriver.

Insert 2 x wooden dowels (H3) into the right side panel (P3).



Step 5


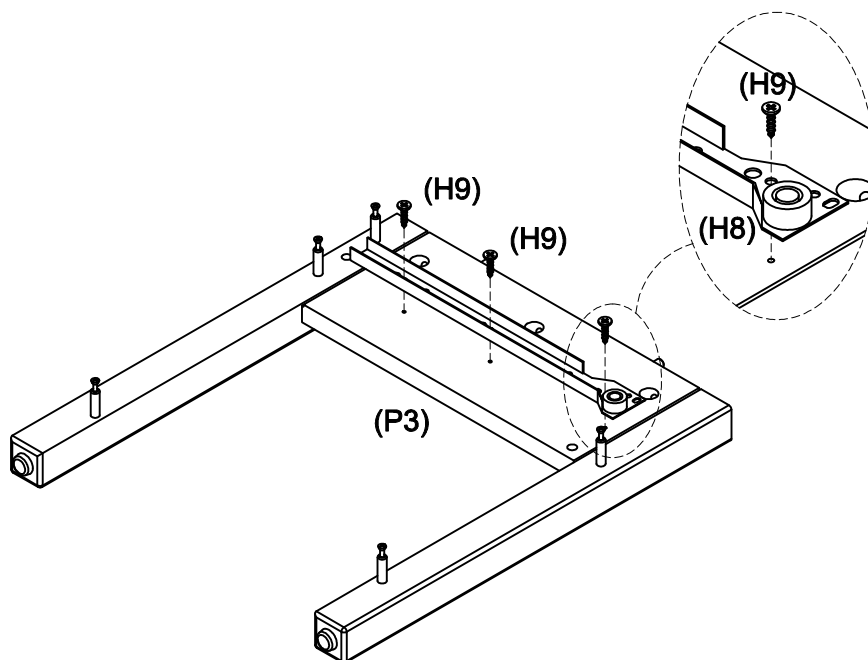
You will need	
	
1 x Right Runner Track (H8)	Phillips head screwdriver
	
3 x Small Screws (H9)	



Fix the right runner track (H8) to the right side panel (P3) with 3 x small screws (H9) by tightening with a phillips head screwdriver.

Step 6

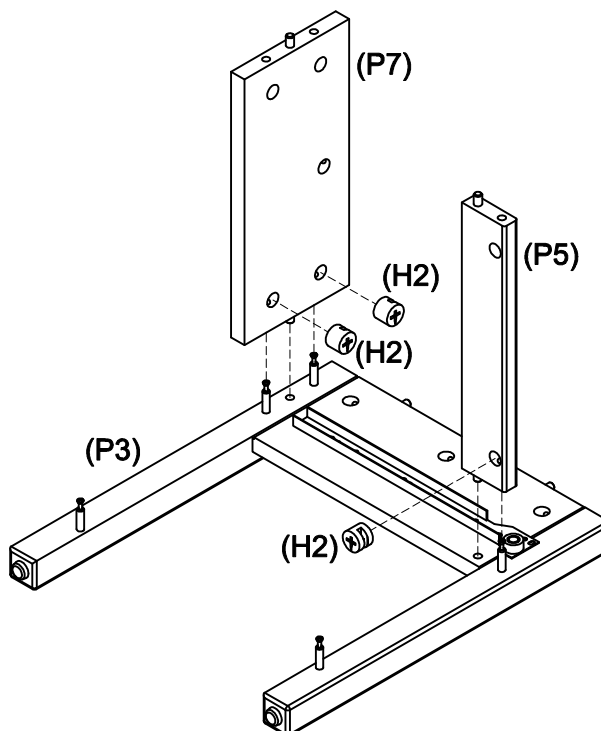

You will need	
	
3 x Cam Nuts (H2)	Phillips head screwdriver





Insert cam nuts (H2) into the front rail (P5) and back panel (P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).

To fix the front rail (P5) and back panel (P7) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 7

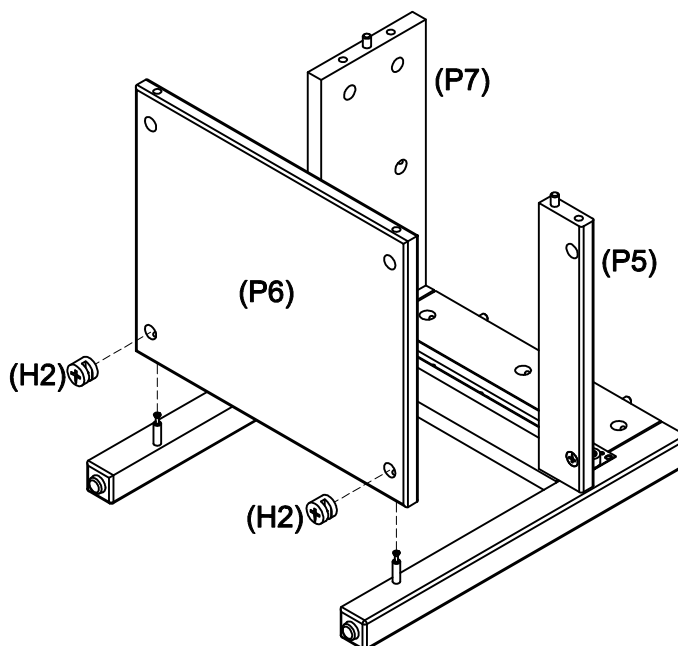

You will need	
	
2 x Cam Nuts (H2)	Phillips head screwdriver



Insert 2 x cam nuts (H2) into the shelf (P6) . Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).
To fix the shelf (P6) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 8


You will need	
	
5 x Cam Nuts (H2)	Phillips head screwdriver

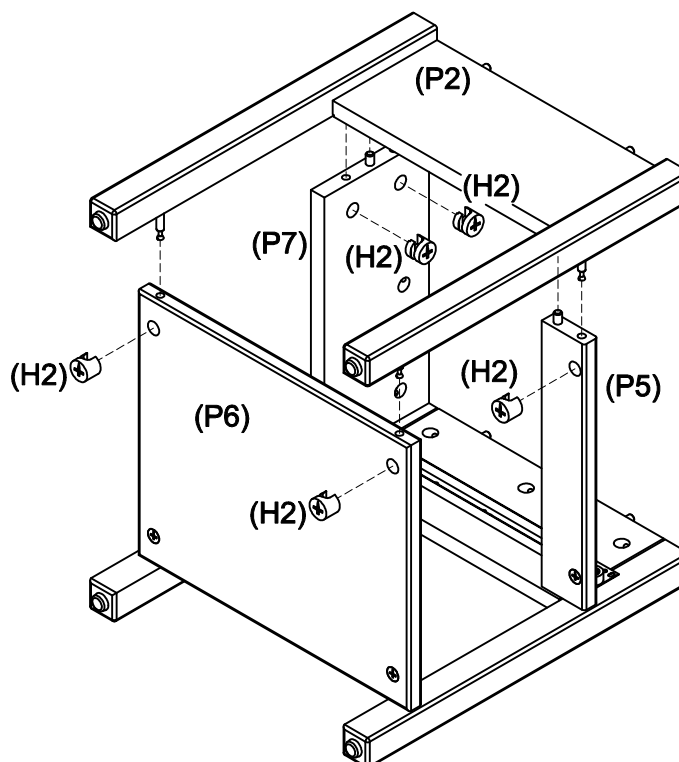

Insert cam nuts (H2) into front rail (P5), shelf (P6) and back panel (P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).
To fix the front rail (P5), shelf (P6) and back panel (P7) to the left side panel (P2), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 9


You will need	
	
7 x Cam Bolts (H1)	Phillips head screwdriver

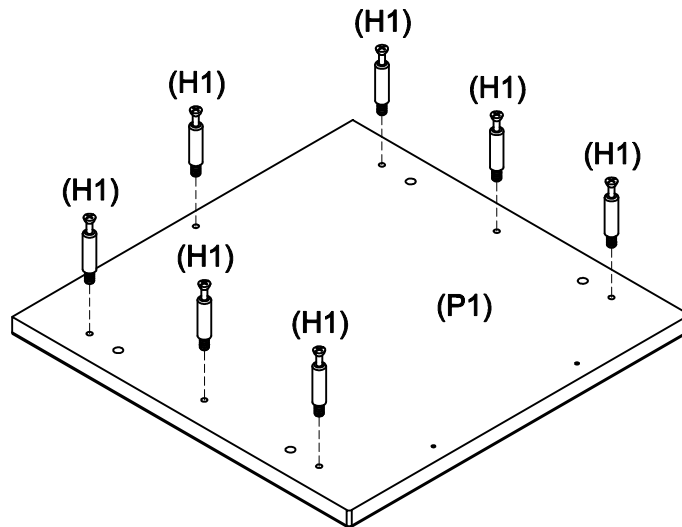

Fix 7 x cam bolts (H1) to the top panel (P1) by tightening with a phillips head screwdriver.



Step 10


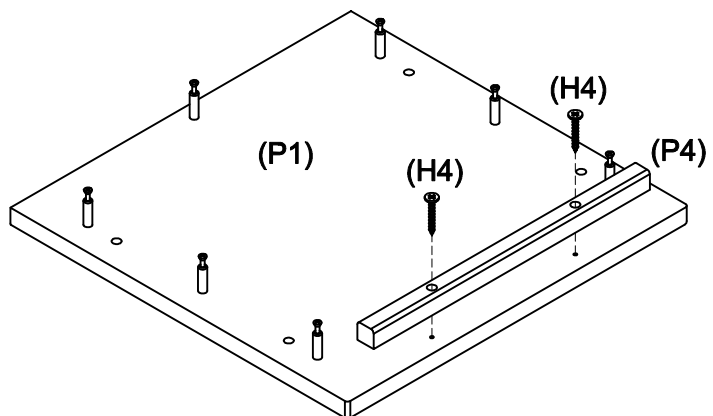
You will need	
	
2 x Large Screws (H4)	Phillips head screwdriver



Fix the top panel rail (P4) to the top panel (P1) with 2 x large screws (H4) by tightening with a phillips head screwdriver.



Step 11


You will need	
	
7 x Cam Nuts (H2)	Phillips head screwdriver

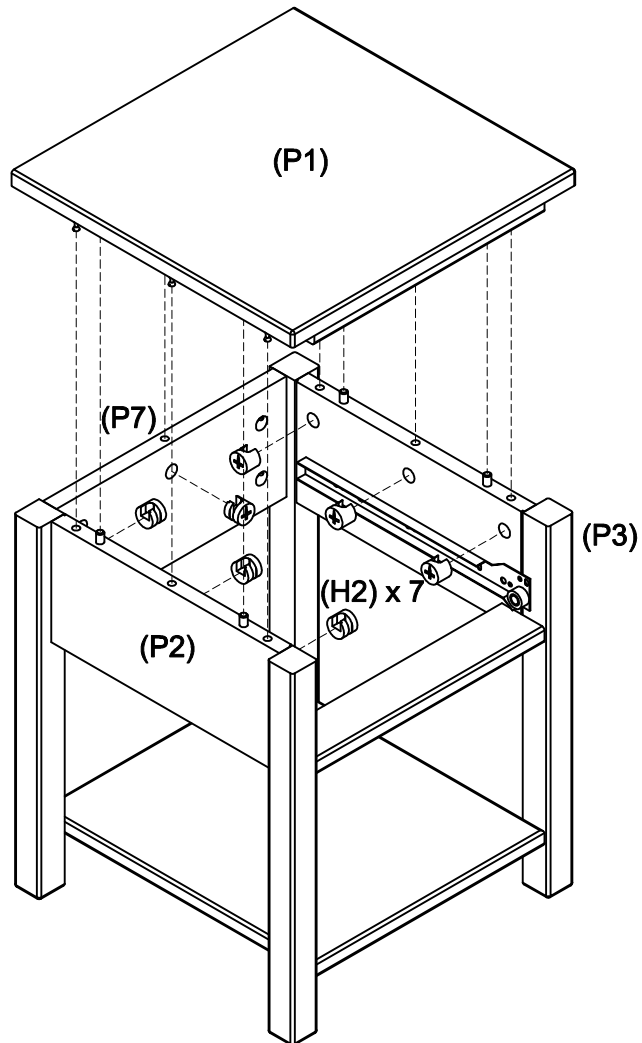

Insert cam nuts (H2) into the left side panel (P2), the right side panel (P3) and the back panel (P7) . Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1). To fix the left side panel (P2), the right side panel (P3) and the back panel (P7) to the top panel (P1), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 12


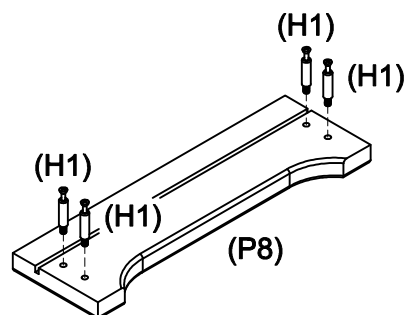
You will need	
	
4 x Cam bolts (H1)	Phillips head screwdriver



Fix 4 x cam bolts (H1) to the drawer front panel (P8) by tightening with a phillips head screwdriver.

Step 13


You will need	
	
4 x Cam Nuts (H2)	Phillips head screwdriver

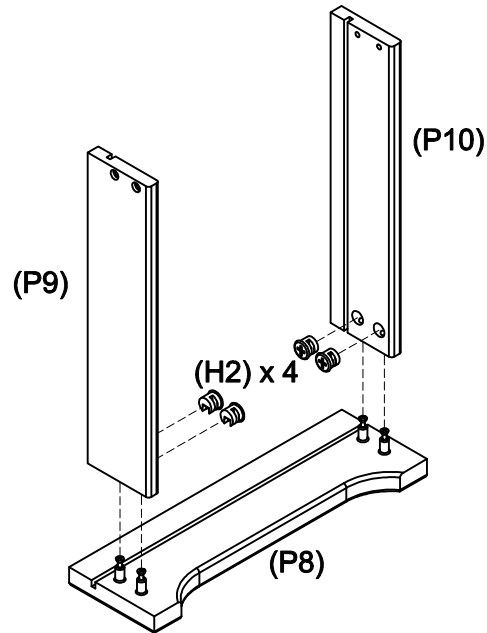

Insert 4 x cam nuts (H2) into the left and right drawer sides (P9, P10), rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).



To secure the left and right drawer sides (P9, P10) to the drawer front (P8), use the phillips head screwdriver to tighten the small cam nuts (H2).


Step 14

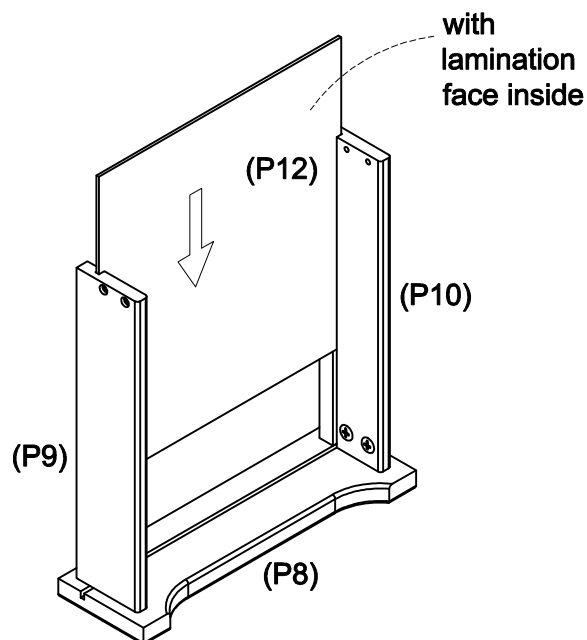

Slide the drawer base (P12) into the grooves of the left and right drawer sides (P9, P10) and the drawer front (P8).


Step 15


You will need	
	
4 x Large Screws (H4)	Phillips head screwdriver

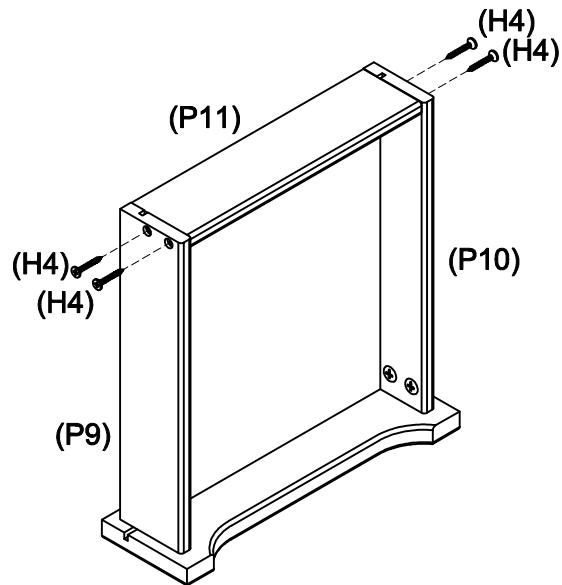

Use 4 x large screws (H4) to fix the drawer back (P11) to the drawer sides (P9, P10), by tightening with the phillips head screwdriver.


Step 16

You will need	
	
6 x Small Screws (H9)	Phillips head screwdriver
	
1 x Left Runner (H5)	1 x Right Runner (H6)

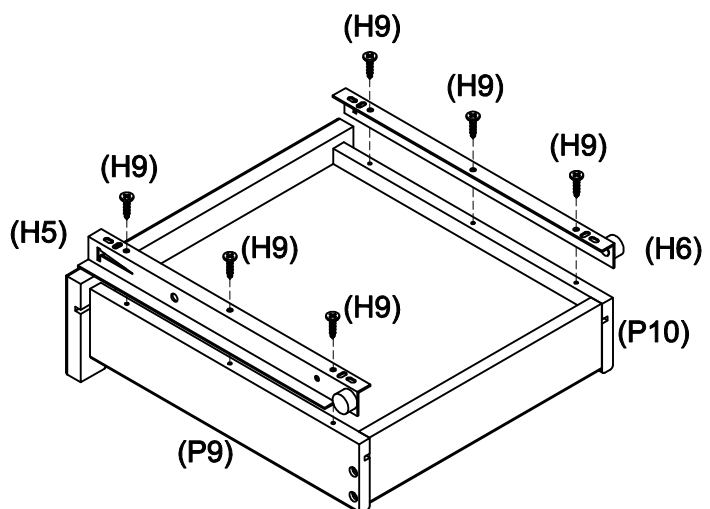


Fix the left runner (H5) to the left drawer side (P9) and right runner (H6) to the right drawer side (P10) with 6 x small screws (H9) by tightening with the phillips head screwdriver.

Step 17

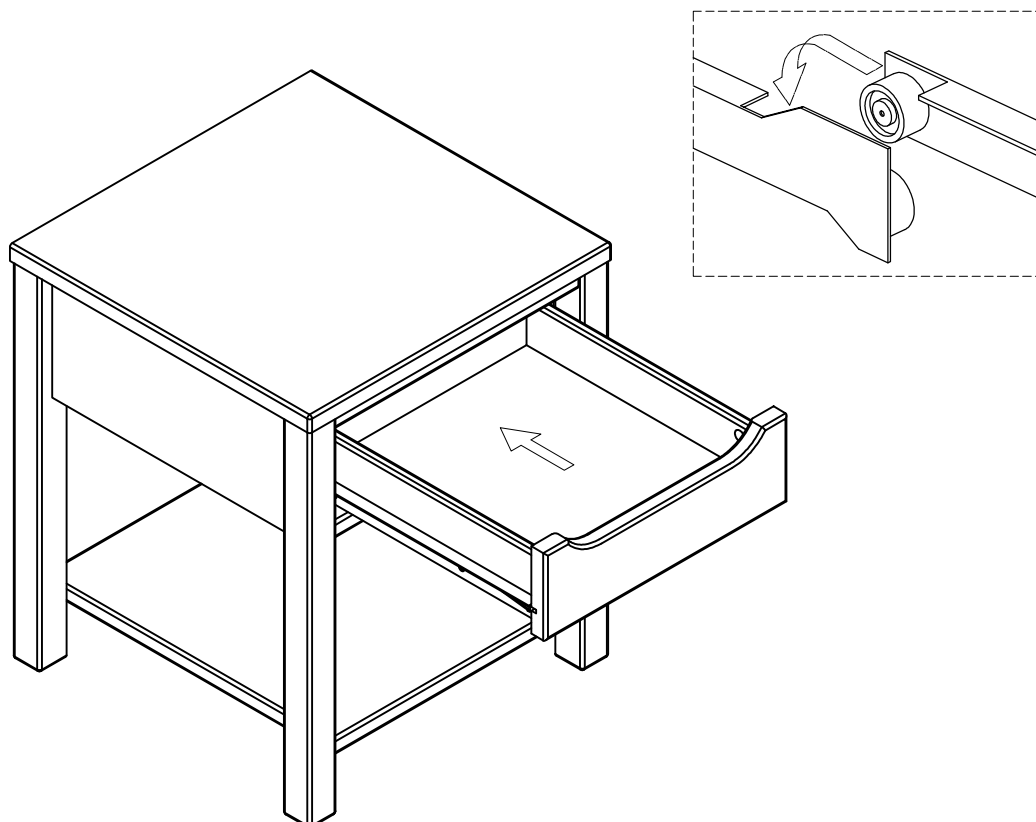

Carefully slide the drawer into the cabinet.

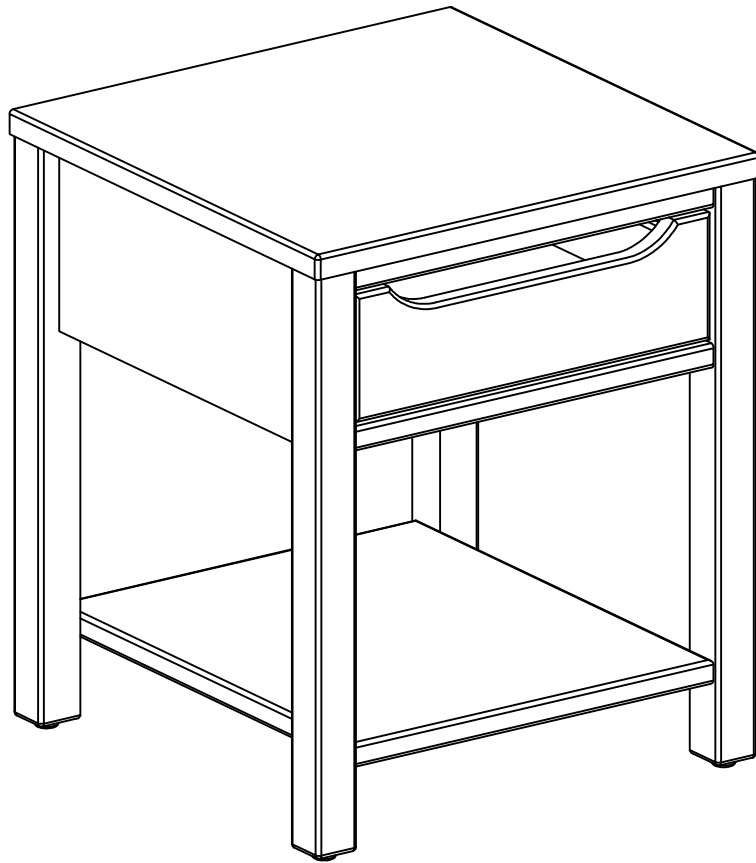

Job Complete!

In the interest of our environment
please dispose of all packing thoughtfully.