




Version 1.0

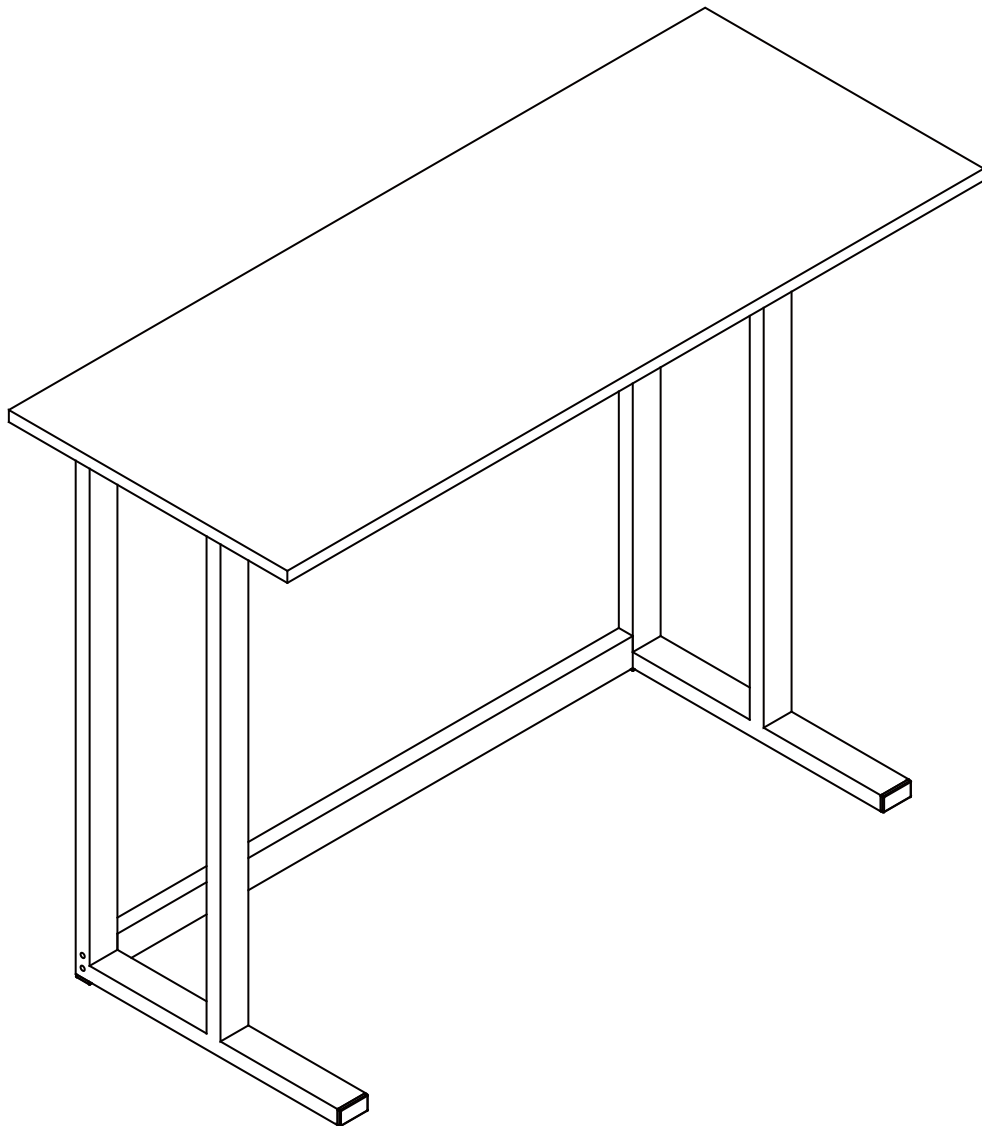

ADAPT

Laptop Desk

www.fantasticfurniture.com.au


Enjoy
Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.

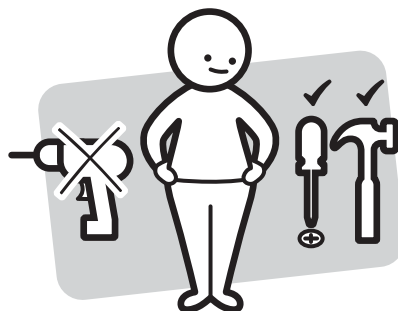

Make sure you have all the required tools.
Never use power tools unless instructed.

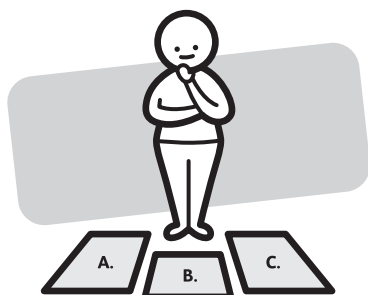

Identify and lay out all of the components before you begin assembly.

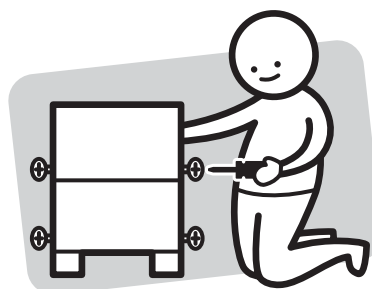

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE

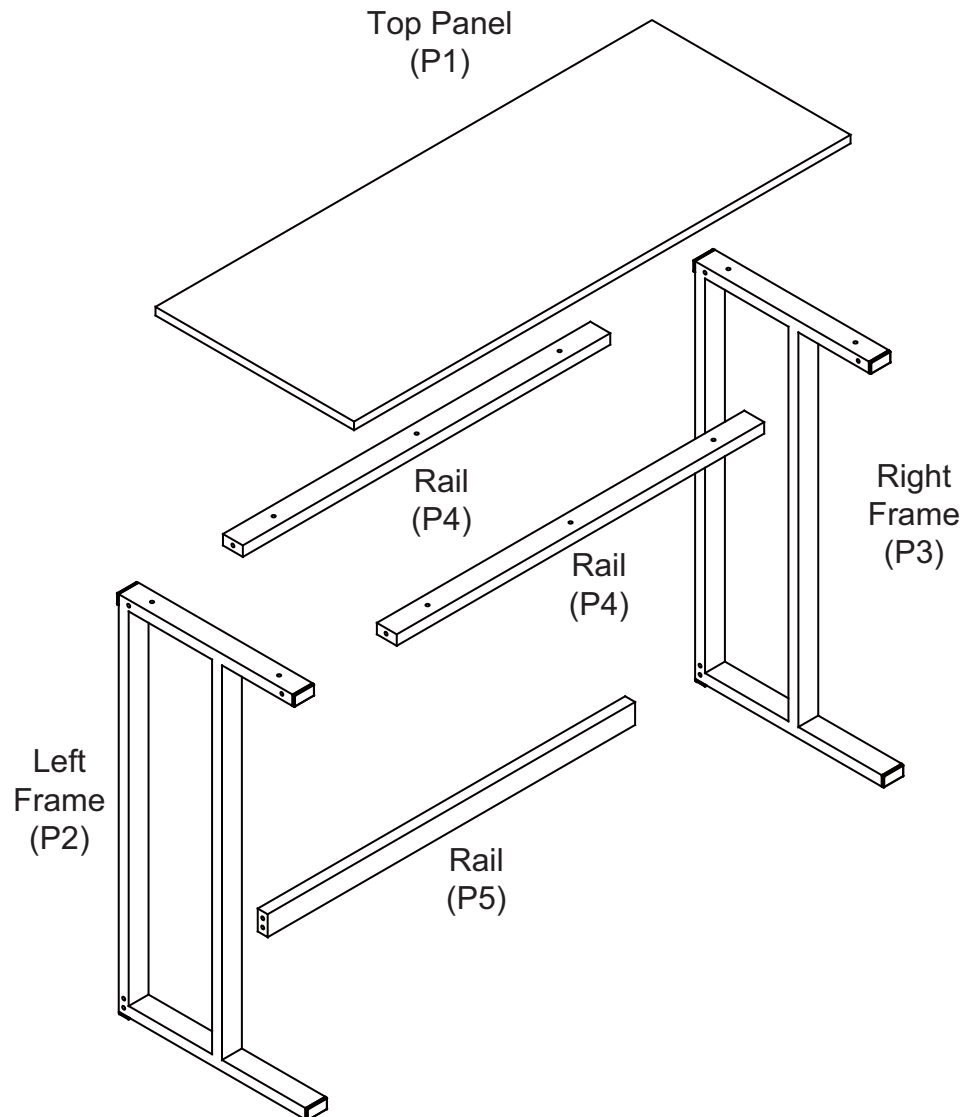

Parts list

Box 1: Top Panel (P1);
Left Frame (P2);
Right Frame (P3);
2 x Rails (P4);
Rail (P5);

Hardware



8 x Long Bolts
(H1)




10 x Bolts
(H2)






18 x Washers
(H3)

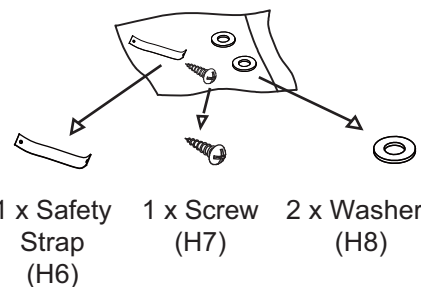


1 x Allen Key
(H4)






Step 1

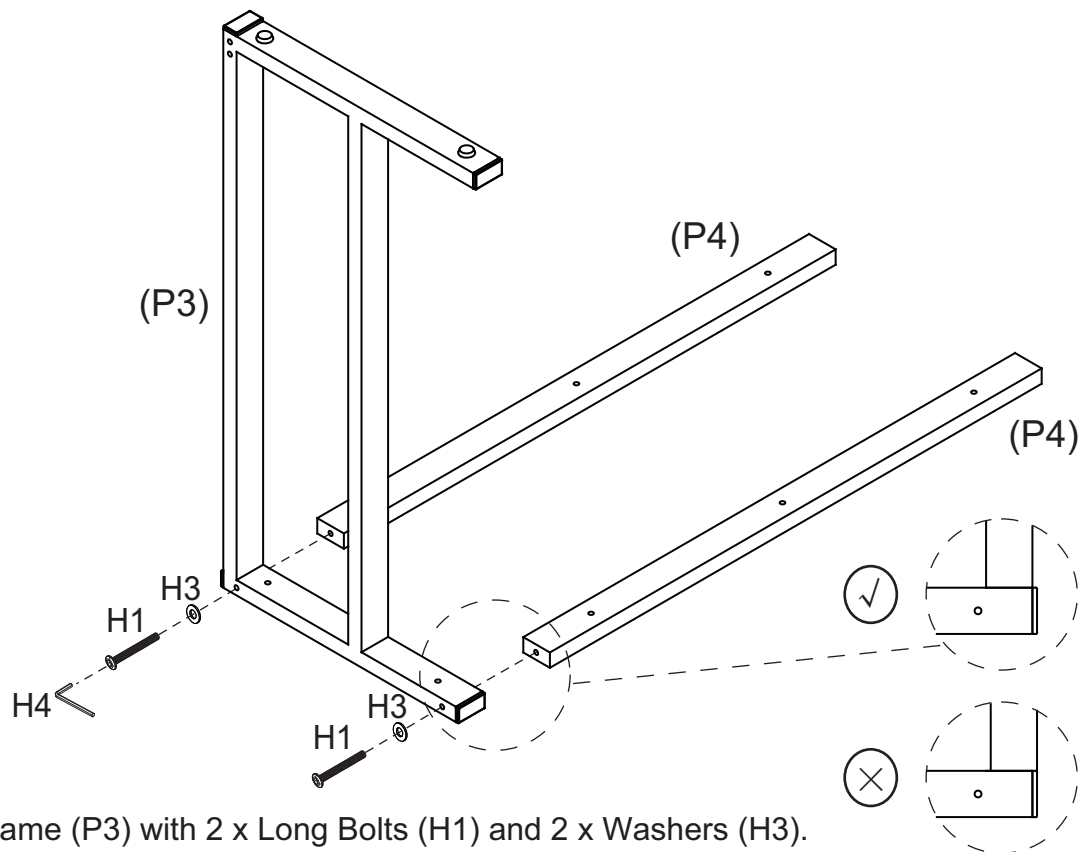
You will need	
	
2 x Long Bolts (H1)	2 x Washers (H3)
	
1 x Allen Key (H4)	



Attach Rails (P4) to Right Frame (P3) with 2 x Long Bolts (H1) and 2 x Washers (H3). Tighten the bolts using an Allen Key (H4). Do not fully tighten the bolts, leave a little loose at this stage.




Step 2

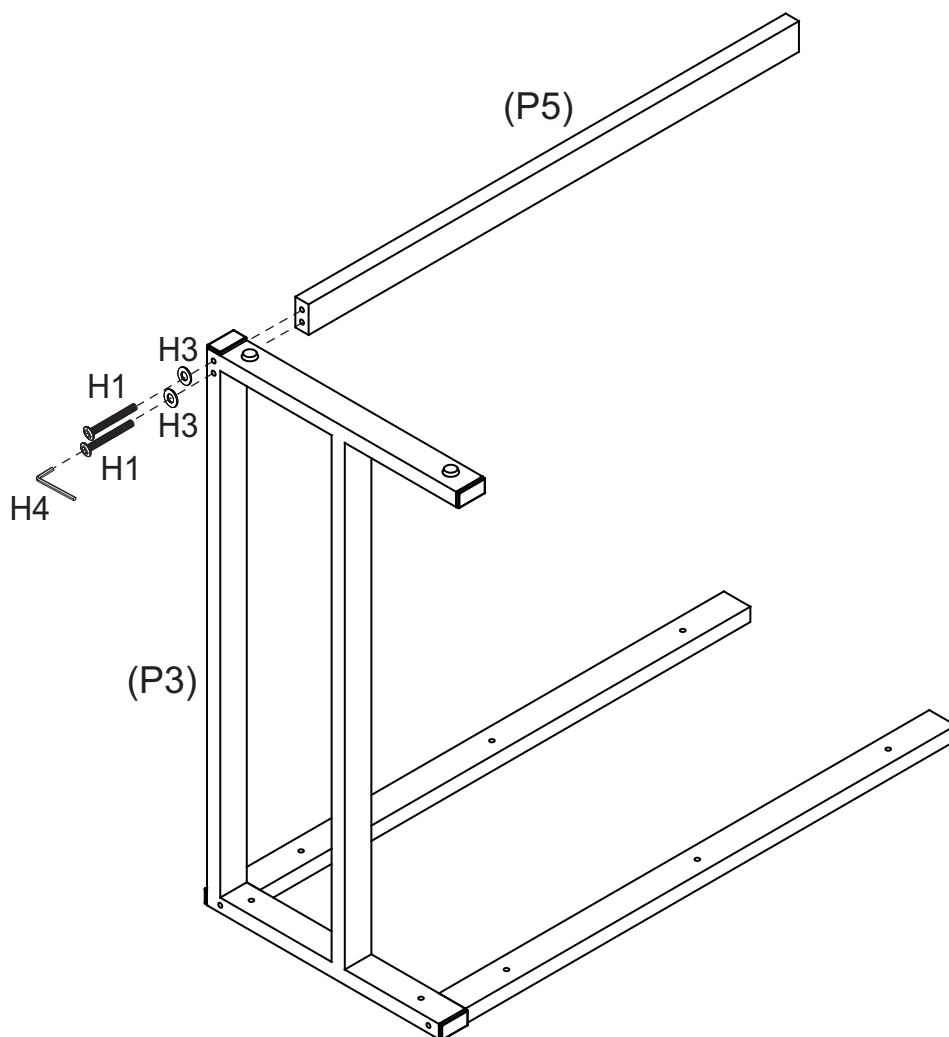
You will need	
	
2 x Long Bolts (H1)	2 x Washers (H3)
	
1 x Allen Key (H4)	



Attach Rail (P5) to Right Frame (P3) with 2 x Long Bolts (H1) and 2 x Washers (H3). Tighten the bolts using an Allen Key (H4). Do not fully tighten the bolts, leave a little loose at this stage.




Step 3

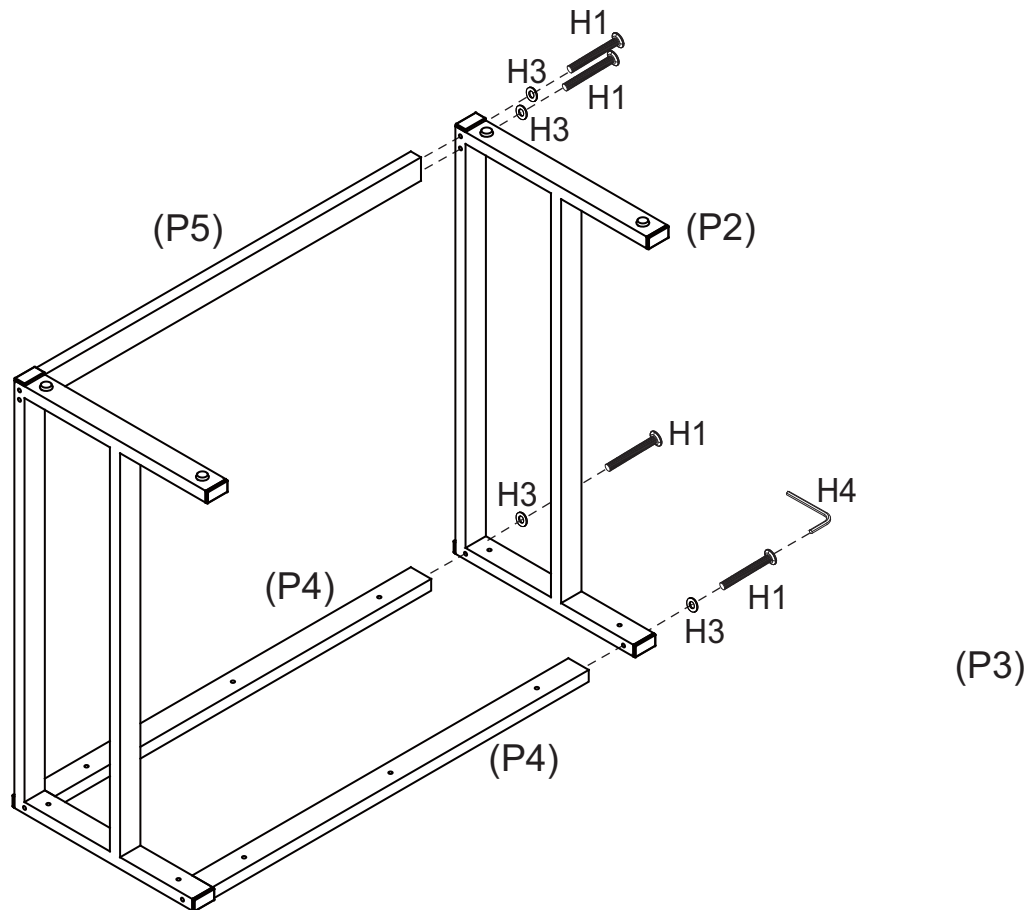
You will need	
	
4 x Long Bolts (H1)	4 x Washers (H3)
	
1 x Allen Key (H4)	



Attach Left Frame (P2) to Rails (P4, P5) with 4 x Long Bolts (H1) and 4 x Washers (H3). Tighten the bolts using an Allen Key (H4). Do not fully tighten the bolts, leave a little loose at this stage.

Step 4


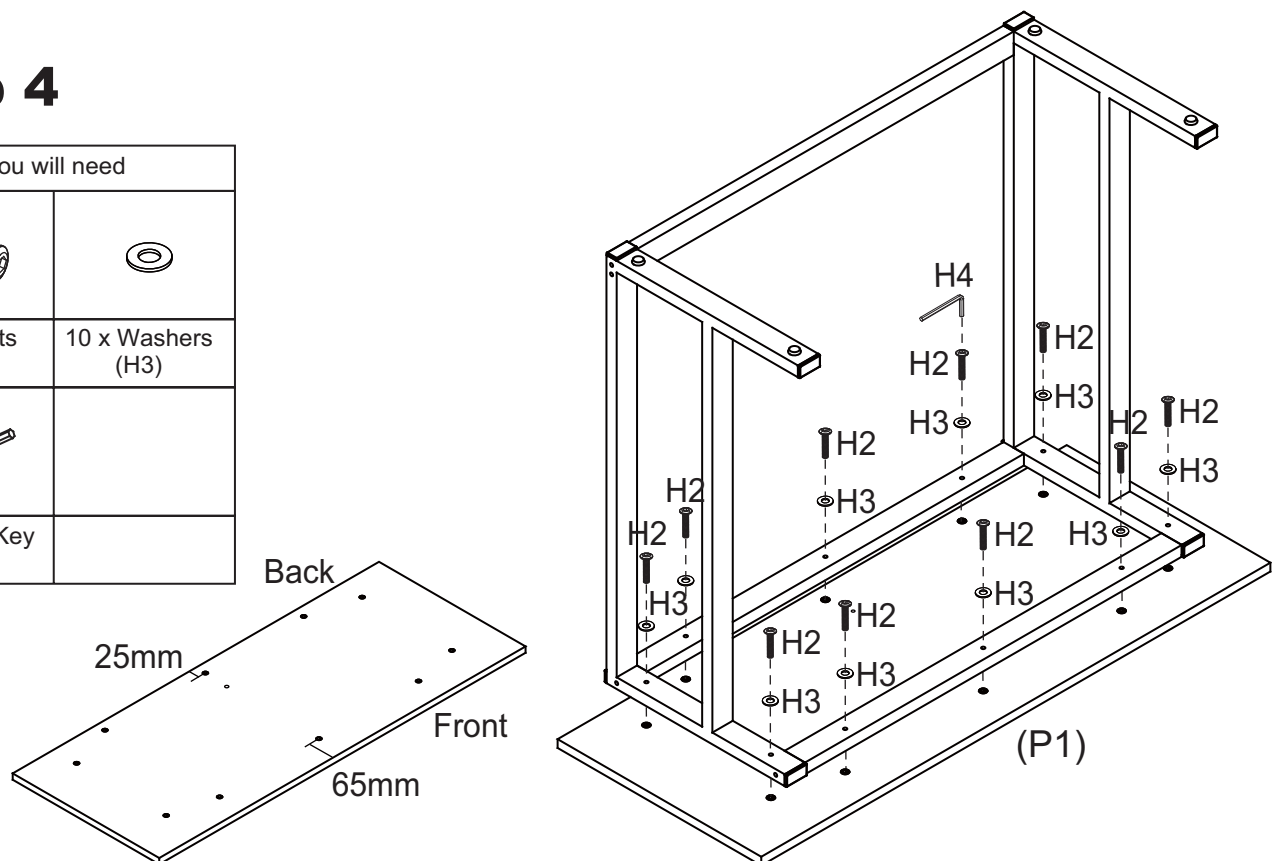


You will need	
	
10 x Bolts (H2)	10 x Washers (H3)
	
1 x Allen Key (H4)	





Put Top Panel (P1) on a soft flat surface as shown. Attach the frame to Top Panel (P1) with 10 x Bolts (H2) and 10 x Washers (H3) using an Allen Key (H4). Check and tighten all bolts.

Step 5

We strongly advise that you use the wall safety strap provided to prevent the unit toppling

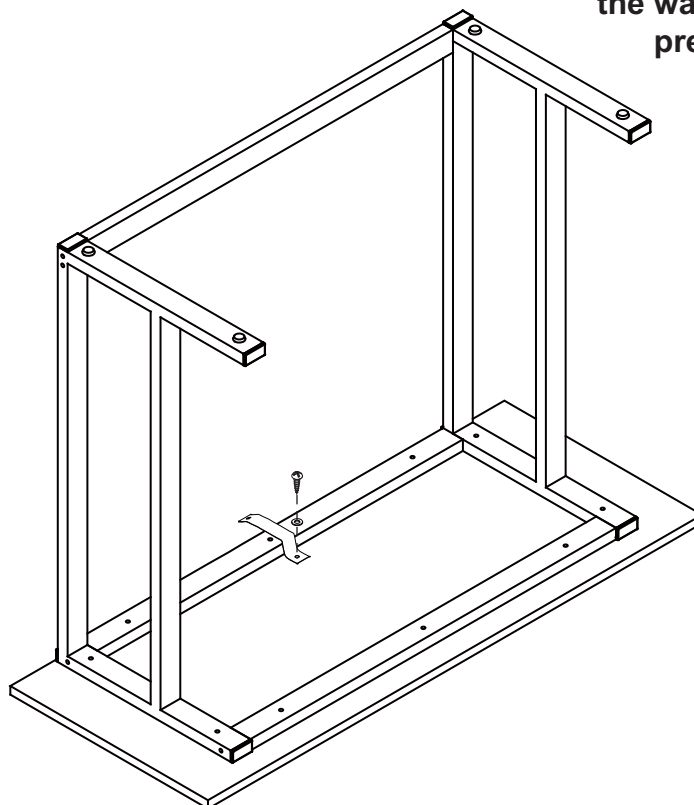

You will need	
	
1 x Safety Strap (H6)	1 x Screw (H7)
	
1 x Washer (H8)	Phillips head screwdriver





Use Screw (H7) and Washer (H8) to attach Safety Strap (H6) securely on the bottom of Top Panel (P1) as shown.

Step 6


Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

You will need	
	
1 x Washer (H8)	Phillips head screwdriver
Screw and Wall Plug which are not provided. Please use appropriate fixtures for your wall.	

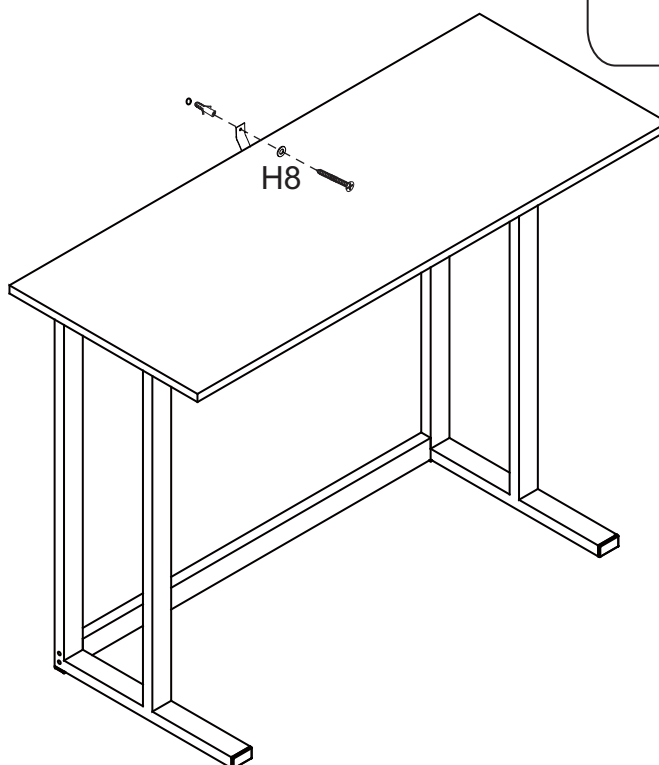


Move the desk to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

Step 7

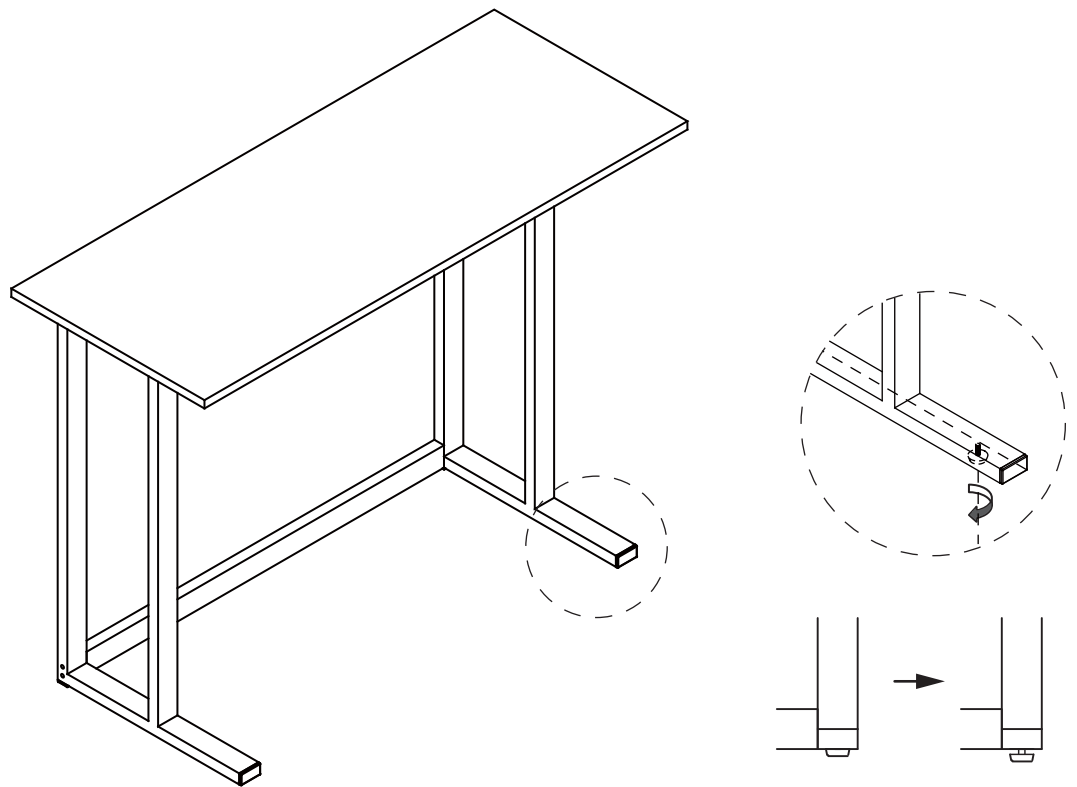

Gentle advise:

If the floor is uneven, please twist the adjustable feet to stabilize the table.

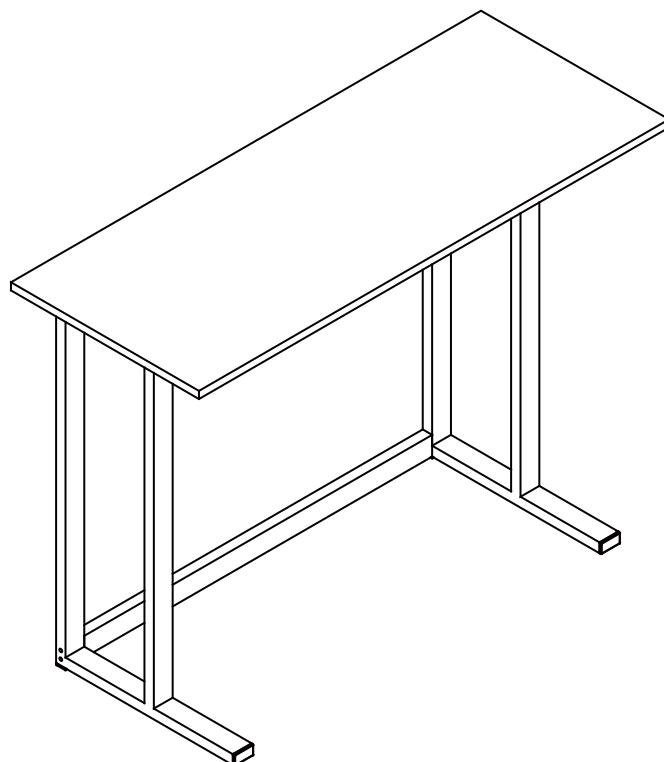


Recommended weight capacity : 50KG.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.0

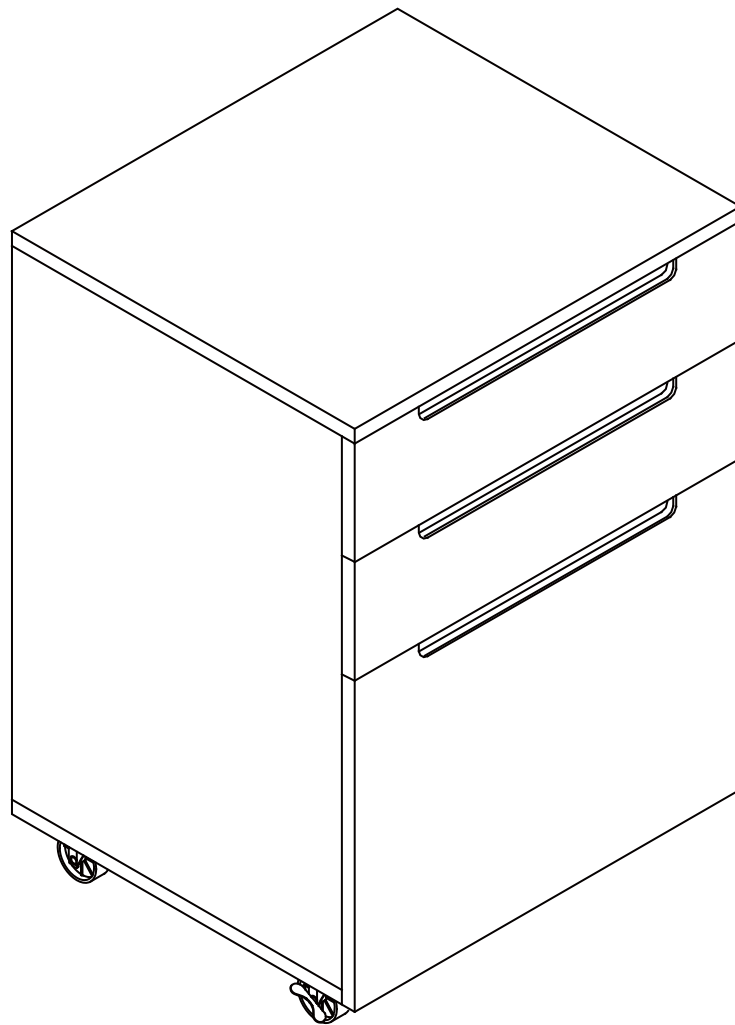

ADAPT

File 3 Drawer

www.fantasticfurniture.com.au


Enjoy
Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.

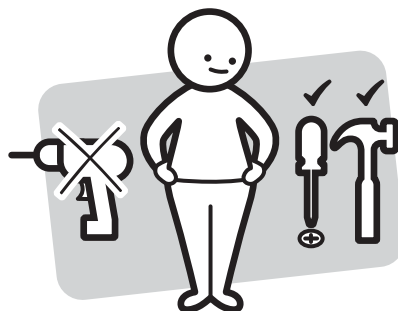

Make sure you have all the required tools.
Never use power tools unless instructed.

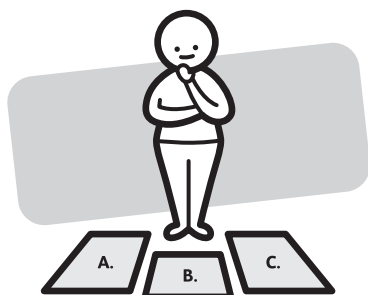

Identify and lay out all of the components before you begin assembly.

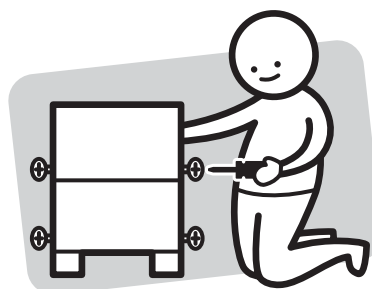

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product




DO NOT USE





Additional Tools Required

Flat head screwdriver;
Phillips head screwdriver;

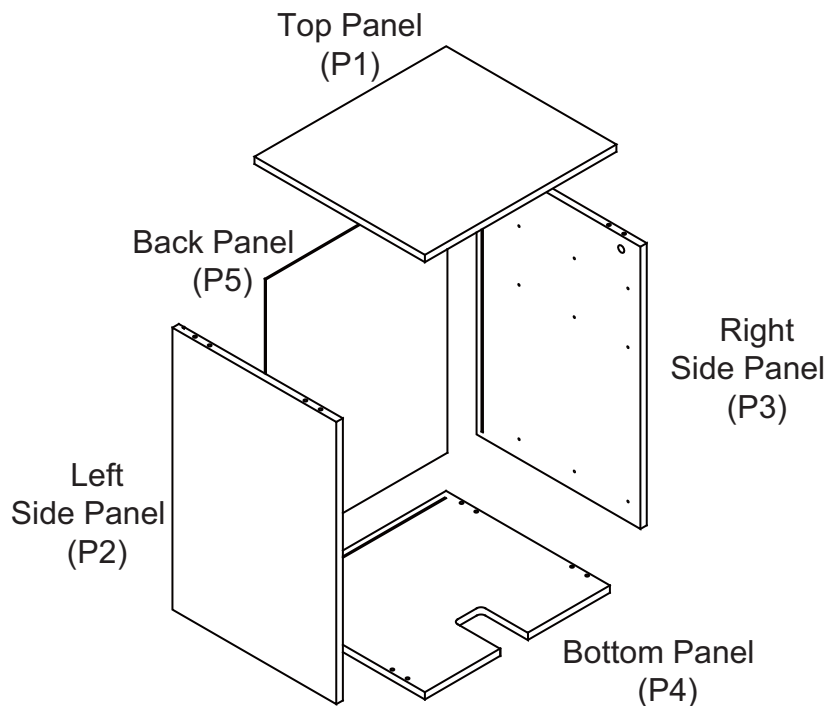

Parts list

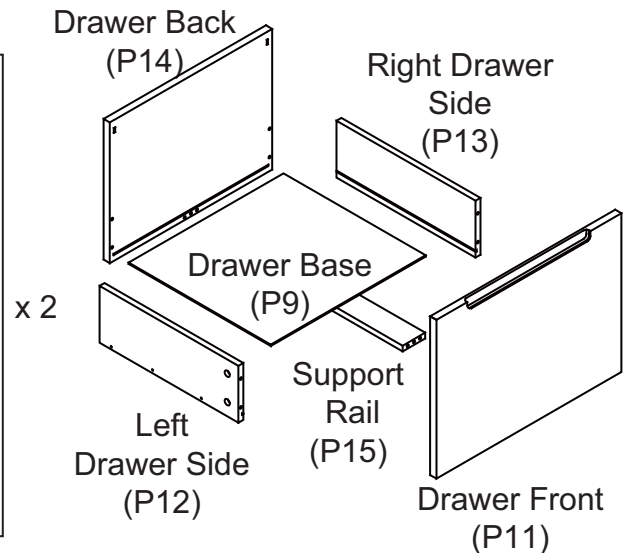
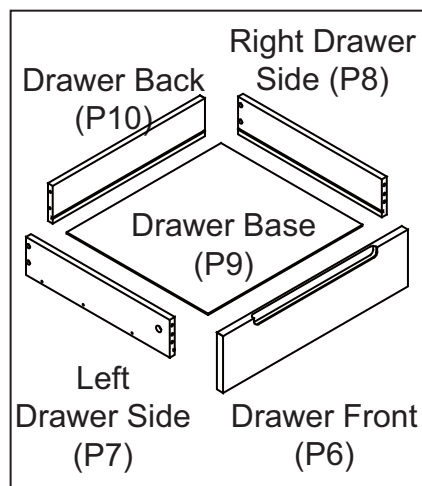


Box 1: Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
Bottom Panel (P4);
Back Panel (P5);
2 x Drawer Fronts (P6);
2 x Left Drawer Sides (P7);
2 x Right Drawer Sides (P8);
3 x Drawer Bases (P9);
2 x Drawer Backs (P10);
Drawer Front (P11);
Left Drawer Side (P12);
Right Drawer Side (P13);
Drawer Back (P14);
Support Rail (P15);






Hardware Pack

8 x Dowels (H1)	12 x Small Dowels (H2)	13 x Cam Bolts (H3)	13 x Cam Nuts (H4)	36 x Small Screws (H5)	3 x CL Runner Tracks (H6)	3 x CR Runner Tracks (H7)	3 x DL Runners (H8)	3 x DR Runners (H9)
2 x Front Wheels (H10)	2 x Wheels (H11)	1 x Large Wheel (H12)	20 x Round Screws (H13)	17 x Long Screws (H14)	2 x Metal Bars (H15)	4 x Wedges (H16)	4 x Screws (H17)	



Step 1


You will need	
	
3 x CL Runner Tracks (H6)	3 x CR Runner Tracks (H7)
	
18 x Small Screws (H5)	Phillips head screwdriver

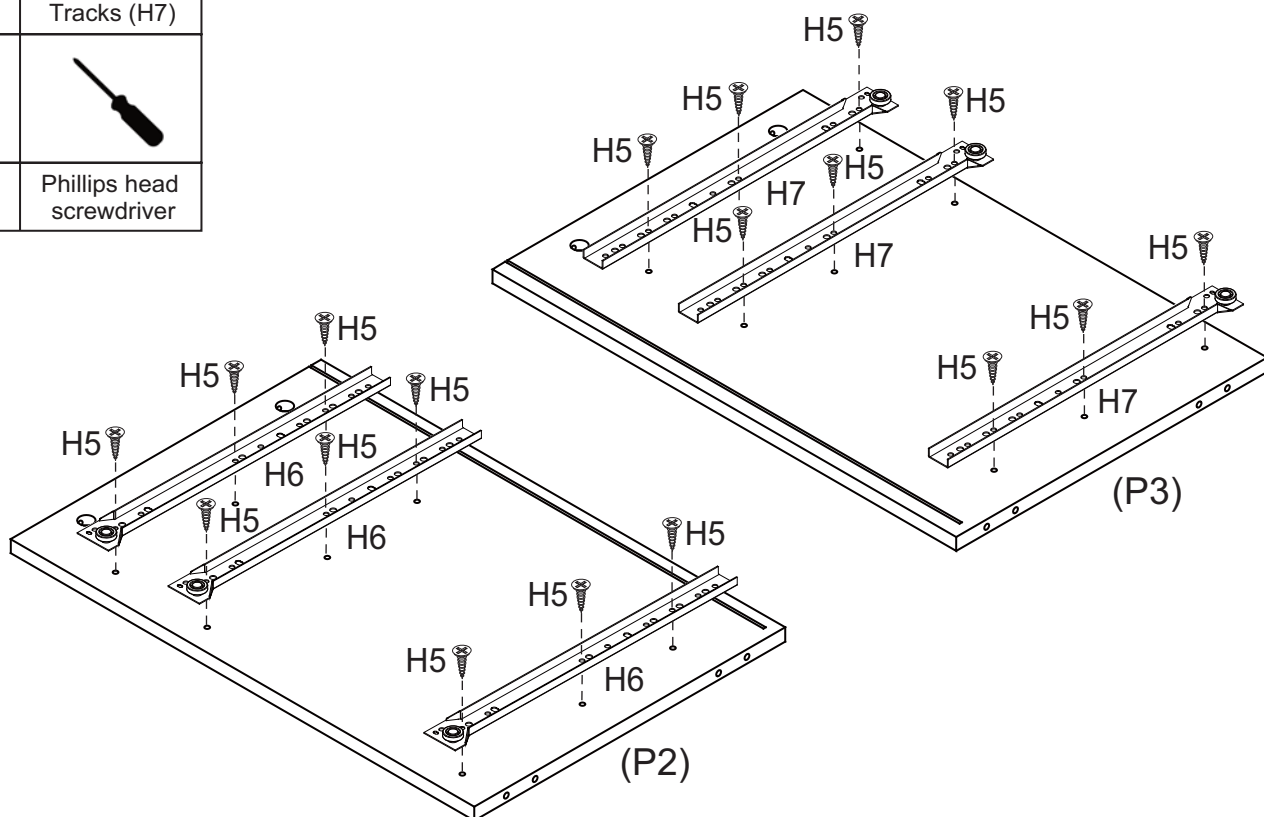

Attach 3 x CL Runner Tracks (H6) to Left Side Panel (P2) with 9 x Small Screws (H5).
Attach 3 x CR Runner Tracks (H7) to Right Side Panel (P3) with 9 x Small Screws (H5) as shown.




Step 2

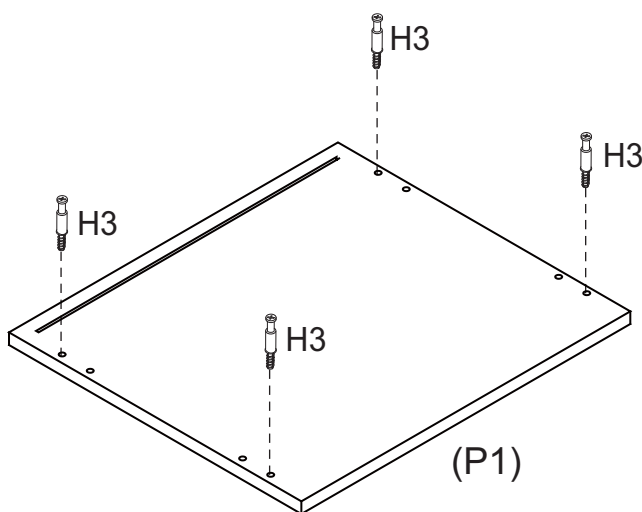You will need	
	
4 x Cam Bolts (H3)	Phillips head screwdriver




Attach 4 x Cam Bolts (H3) into Top Panel (P1) as shown.


Step 3

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Flat head screwdriver	

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

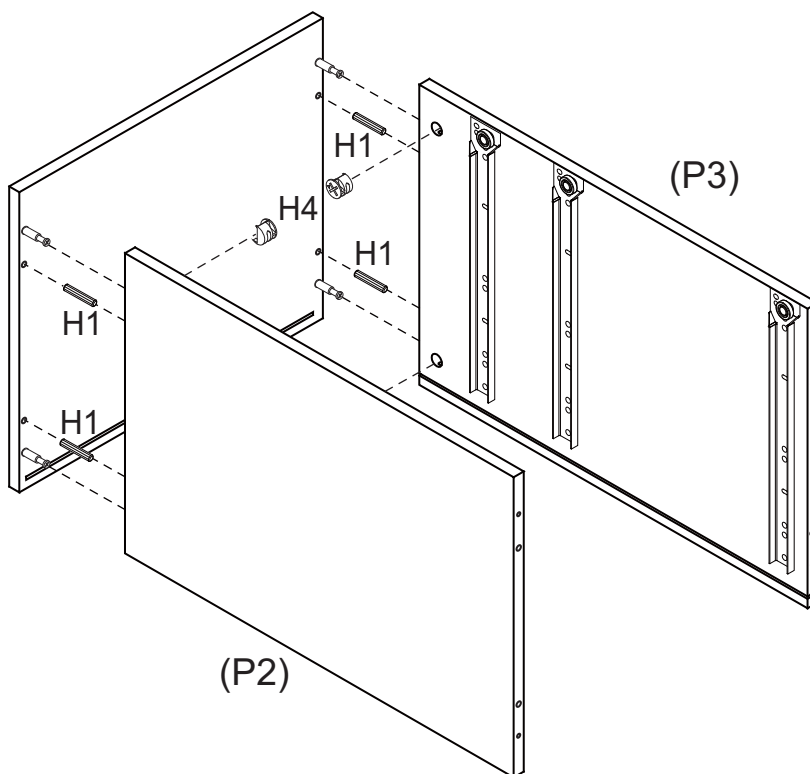


Insert 4 x Dowels (H1) into Side Panels (P2, P3).

Insert 4 x Cam Nuts (H4) into the holes of Side Panels (P2, P3).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Push Top Panel (P1) into place and then tighten the cam nuts using a Flat head screwdriver.

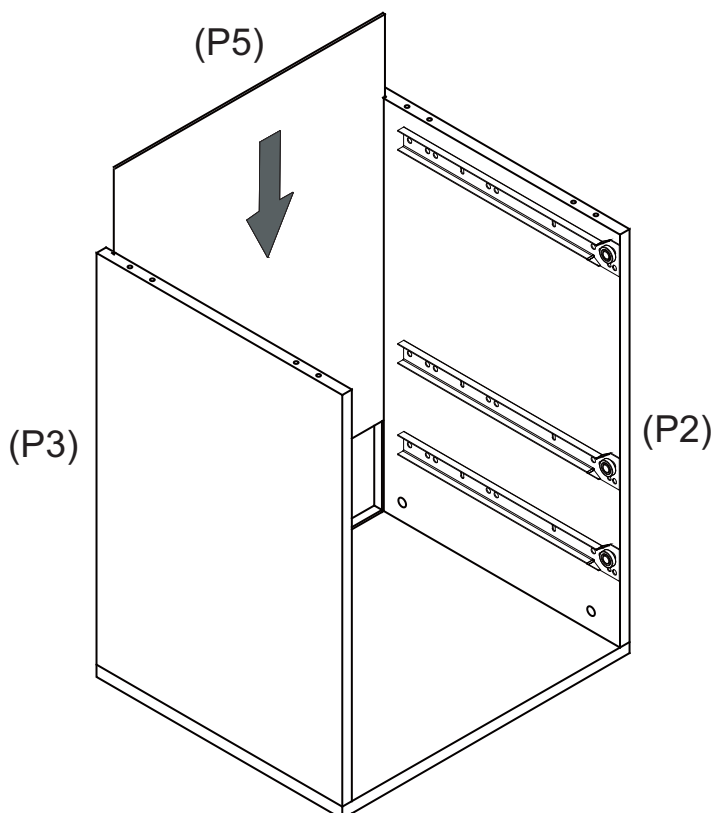


Step 4




Carefully turn the frame over to an upright position.

Slide Back Panel (P5) in through the grooves of Side Panels (P2, P3) as shown.



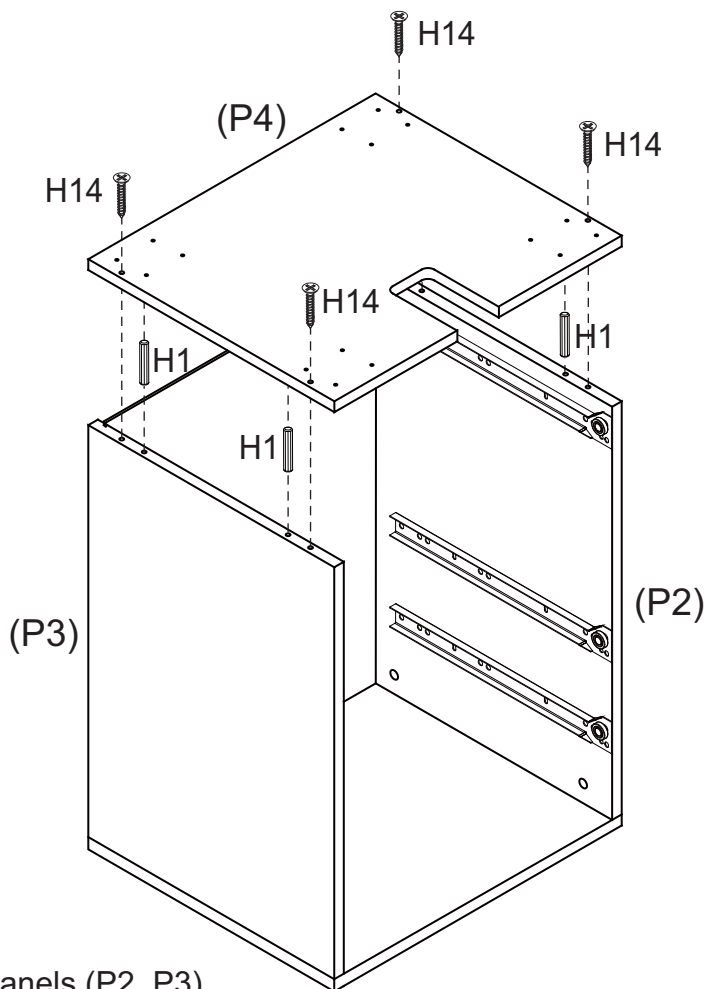

Step 5


You will need	
	
4 x Dowels (H1)	4 x Long Screws (H14)
	
Phillips head screwdriver	



Insert 4 x Dowels (H1) into Side Panels (P2, P3).
Attach Bottom Panel (P4) to Side Panels (P2, P3) with 4 x Long Screws (H14).
Tighten screws using a Phillips head screwdriver.




Step 6


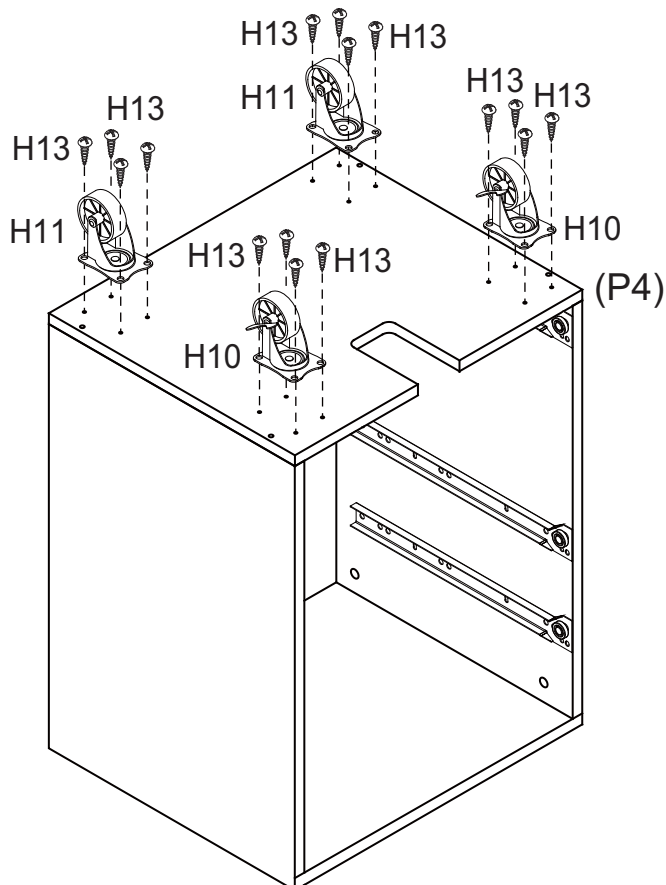
You will need	
	
2 x Front Wheels (H10)	2 x Wheels (H11)
	
16 x Round Screws (H13)	Phillips head screwdriver



Attach 2 x Front Wheels (H10) and 2 x Wheels (H11) to Bottom Panel (P4) with 16 x Round Screws (H13) using a Phillips head screwdriver.



Step 7

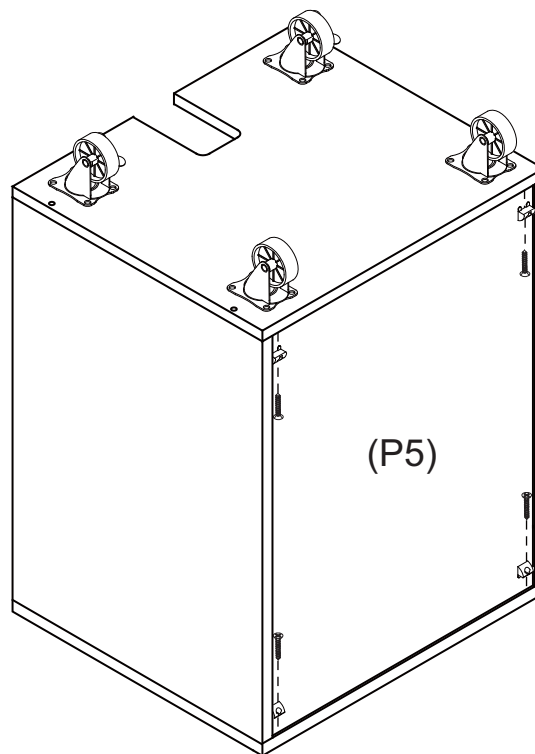
You will need	
	
4 x Wedges (H16)	4 x Screws (H17)
	
Phillips head screwdriver	



Secure Back Panel (P5) in place with 4 x Wedges (H16) using 4 x Screws (H17). Tighten Screws using a Phillips head screwdriver.




Step 8

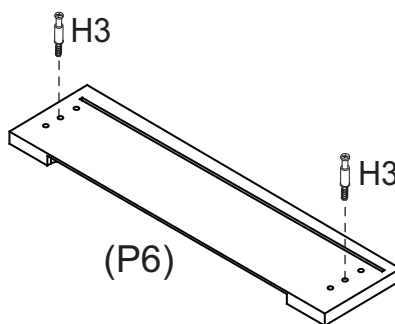
You will need	
	
2 x Cam Bolts (H3)	Phillips head screwdriver



Insert 2 x Cam Bolts (H3) into Drawer Front (P6) with a Phillips head screwdriver.

Step 9


You will need	
	
4 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Flat head screwdriver	

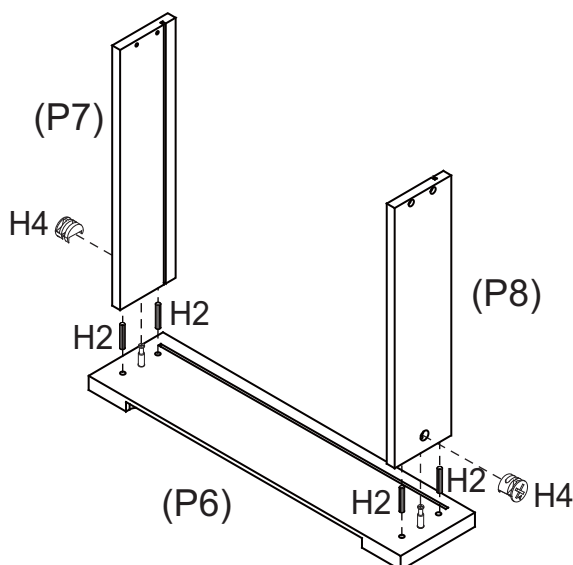

Insert 4 x Small Dowels (H2) into the holes of Drawer Front (P6) as shown. Insert 2 x Cam Nuts (H4) into the holes of Drawer Sides (P7, P8). Rotate the Cam Nuts so the arrows point towards the in-coming Cam Bolts. Push Drawer Sides (P7, P8) into place. Tighten the Cam Nuts using a Flat head screwdriver.



www.fantasticfurniture.com.au

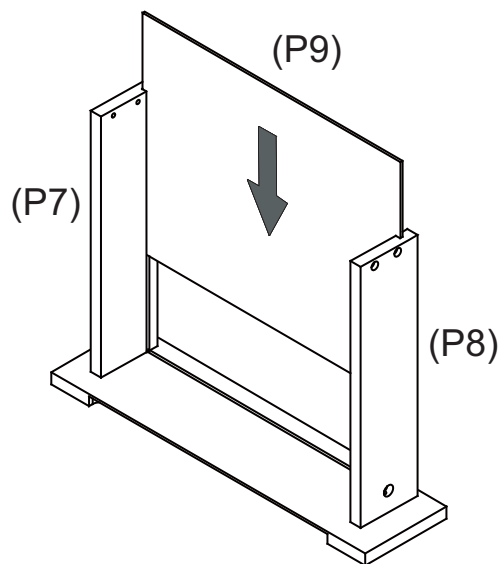
Step 10



Slide Drawer Base (P9) into the grooves of Drawer Sides (P7, P8).





Step 11


You will need	
	
4 x Long Screws (H14)	Phillips head screwdriver

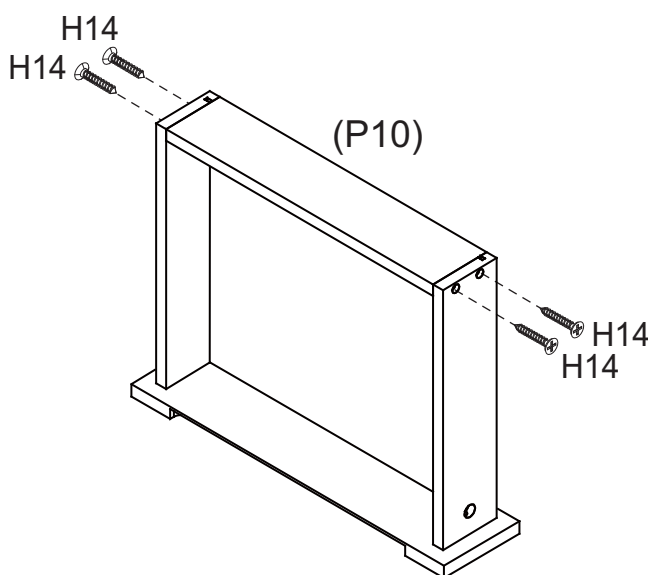

Attach Drawer Back (P10) to Drawer Sides (P7, P8) with 4 x Long Screws (H14), make sure that the groove lines up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.



Step 12


You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
6 x Small Screws (H5)	Phillips head screwdriver

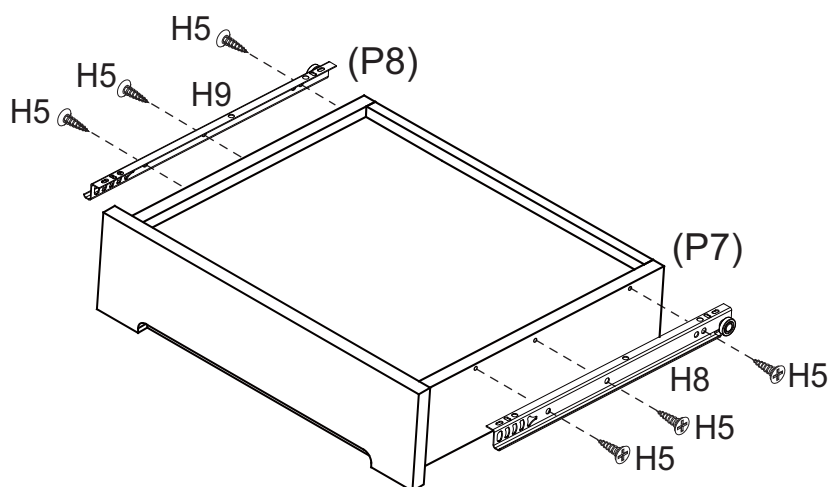

Attach 1 x DL Runner (H8) to Left Drawer Side (P7) and 1 x DR Runner (H9) to Right Drawer Side (P8) with 6 x Small Screws (H5). **Repeat Step 8 to Step 12 to assemble another drawer.**




Step 13

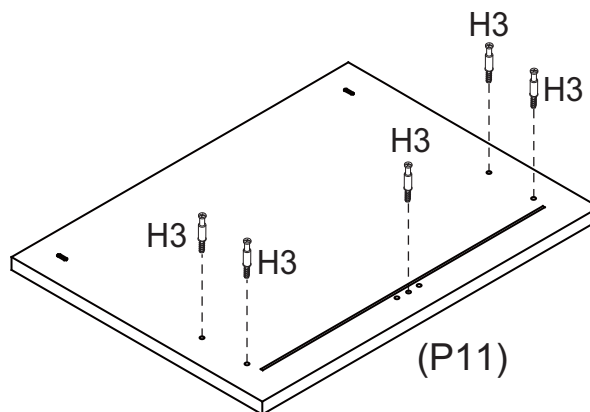
You will need	
	
5 x Cam Bolts (H3)	Phillips head screwdriver



Insert 5 x Cam Bolts (H3) into Drawer Front (P11) with a Phillips head screwdriver.


Step 14

You will need	
	
2 x Small Dowels (H2)	5 x Cam Nuts (H4)
	
Flat head screwdriver	

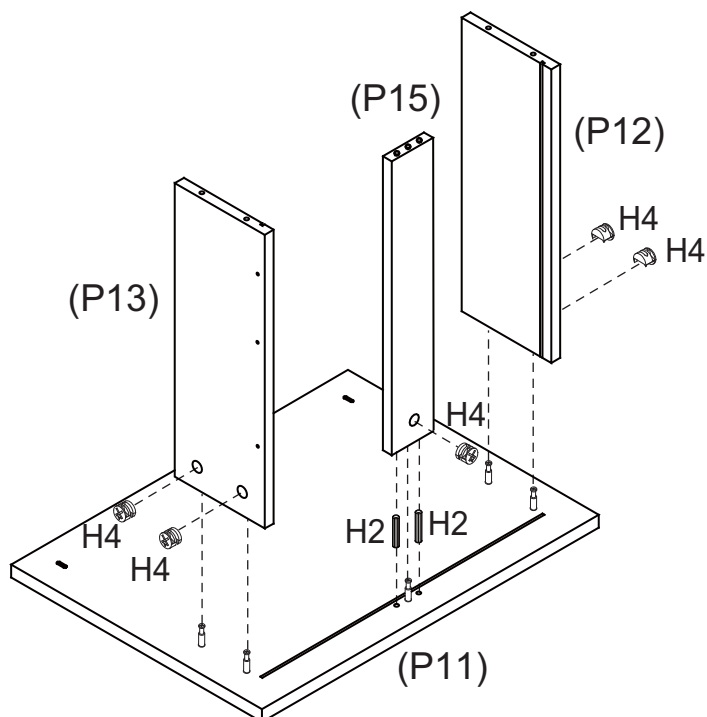





Insert 2 x Small Dowels (H2) into the holes of Drawer Front (P11) as shown.
 Insert 5 x Cam Nuts (H4) into the holes of Drawer Sides (P12, P13) and Support Rail (P15).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Push Drawer Sides (P12, P13) and Support Rail (P15) into place and tighten the cam nuts.

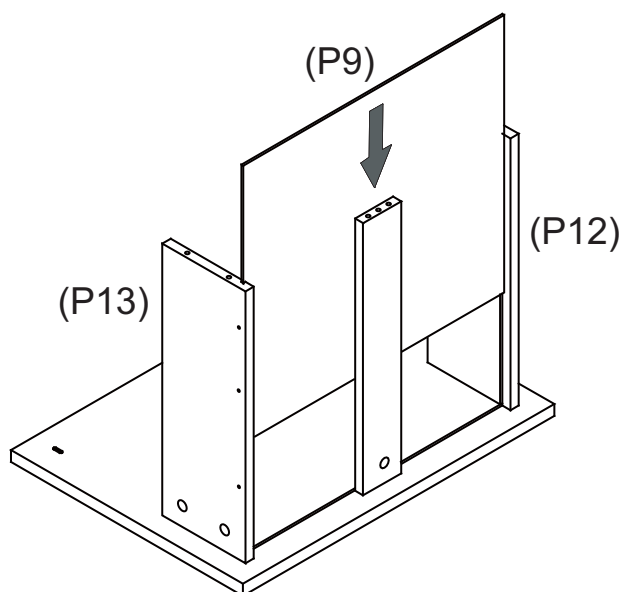
Step 15



Slide Drawer Base (P9) into the grooves of Drawer Sides (P12, P13).





Step 16


You will need	
	
2 x Small Dowels (H2)	5 x Long Screws (H14)
	
2 x Metal Bars (H15)	Phillips head screwdriver

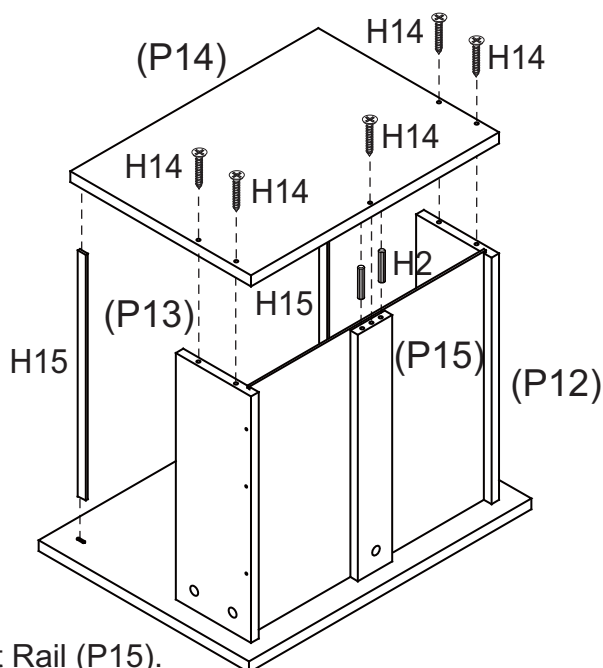

Insert 2 x Small Dowels (H2) into Support Rail (P15).
 Insert one side of 2 x Metal Bars (H15) to the grooves of Drawer Front (P13),
 Attach Drawer Back (P14) to Drawer Sides (P12, P13) and Support Rail (P15)
 with 5 x Long Screws (H14), make sure that the groove lines up the whole way
 around the drawer and another side of Metal bars (H15).
 Tighten Screws using a Phillips head screwdriver.




Step 17


You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
6 x Small Screws (H5)	Phillips head screwdriver

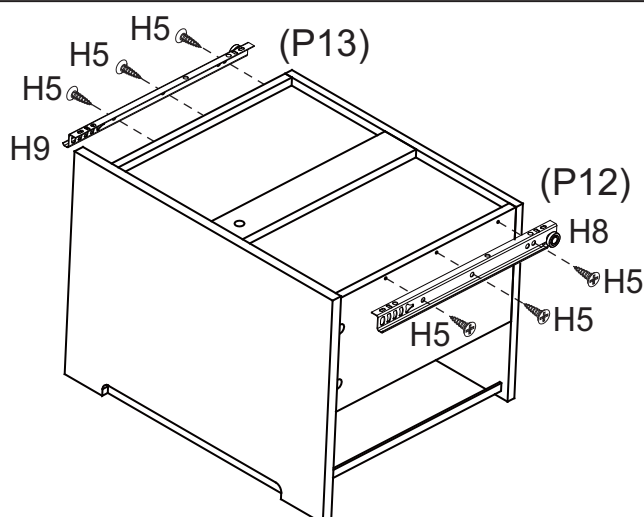

Attach 1 x DL Runner (H8) to Left Drawer Side (P12) and
 1 x DR Runner (H9) to Right Drawer Side (P13) with 6 x Small Screws (H5).


Step 18

You will need	
	
1 x Large Wheel (H12)	4 x Round Screws (H13)
	
Phillips head screwdriver	

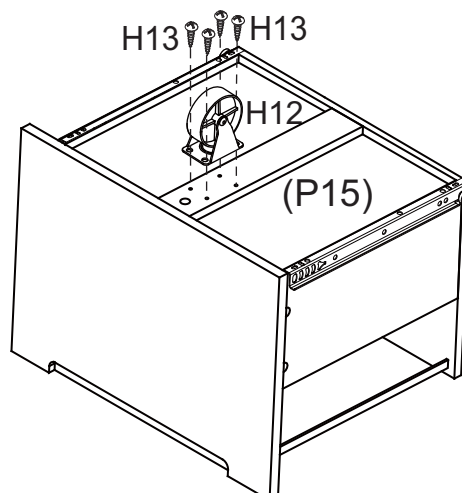


Attach 1 x Large Wheel (H12) to Support Rail (P15) with
 4 x Round Screws (H13) using a Phillips head screwdriver.

Step 19

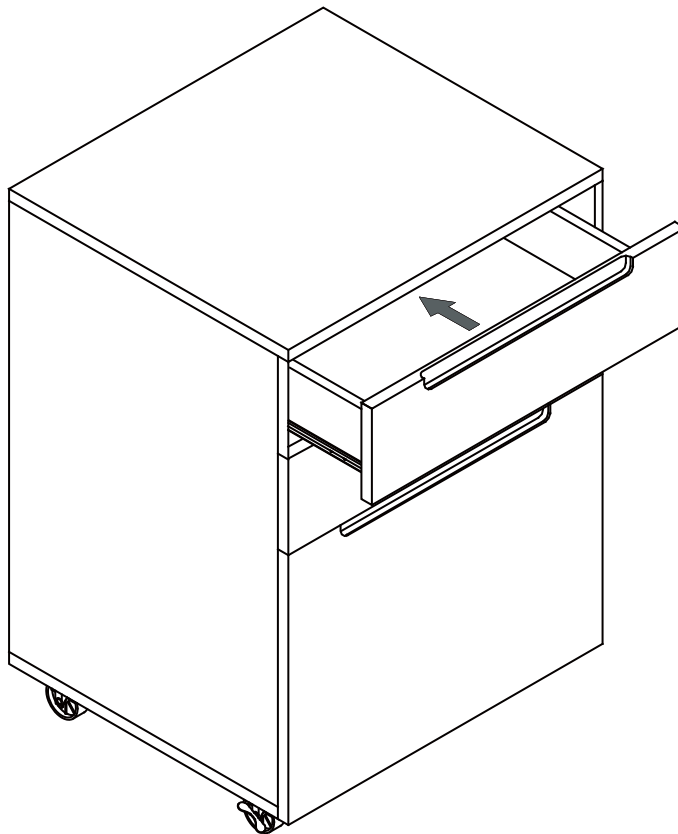

Put the drawers into the chest as shown.

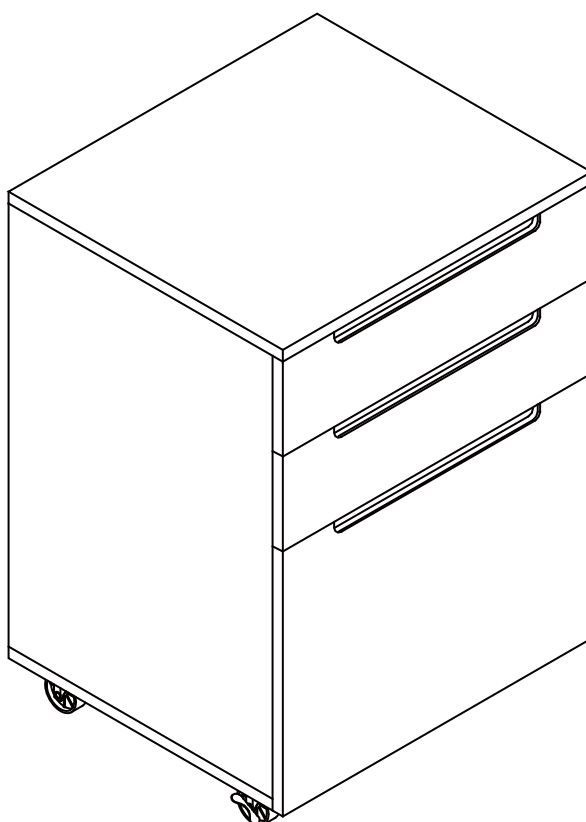


Recommended weight capacity : 80KG.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.0

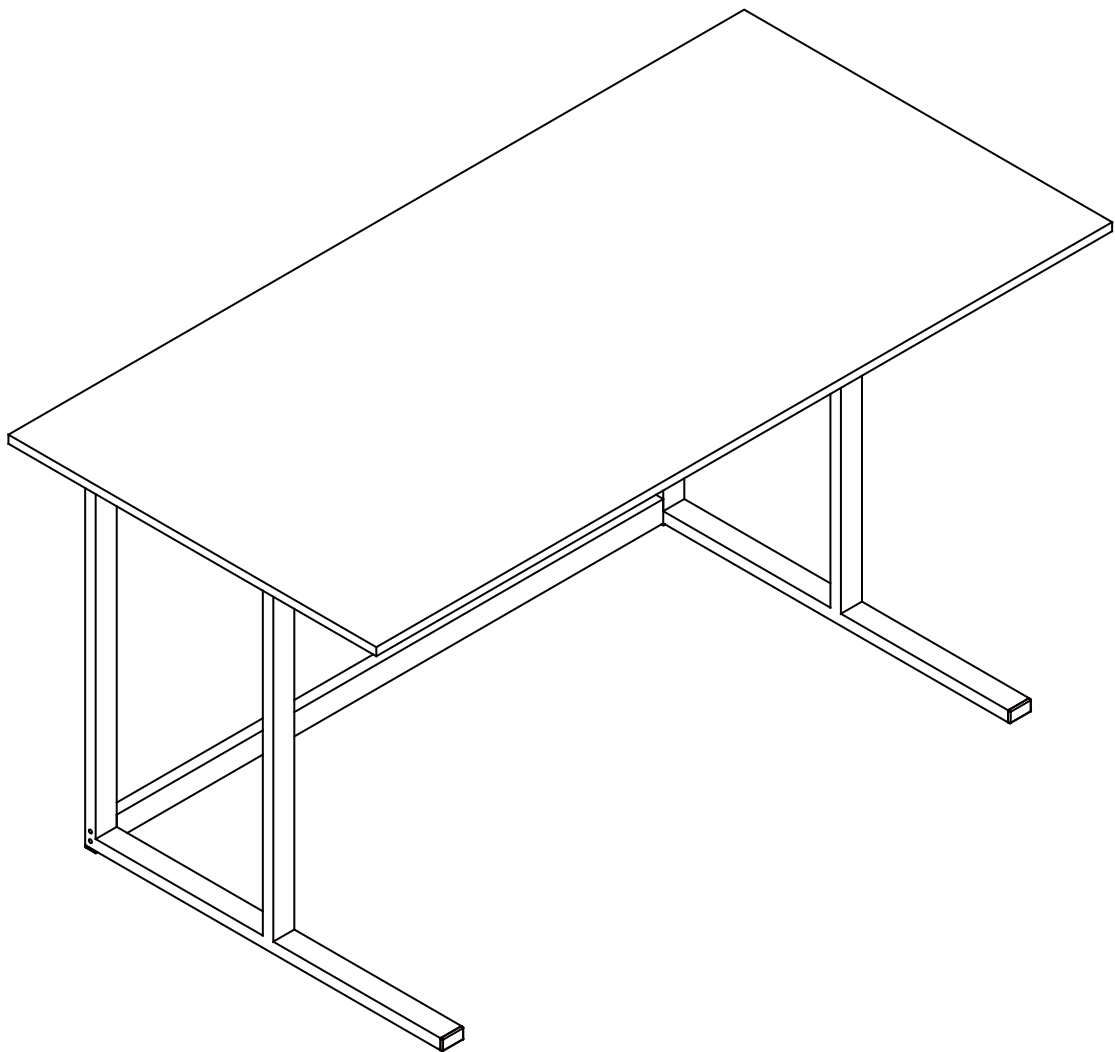

TWO PEOPLE



REQUIRED

ADAPT

Desk

www.fantasticfurniture.com.au


Enjoy
Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.

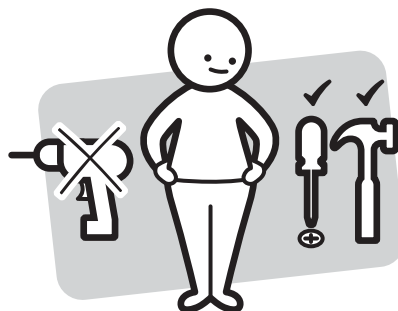

Make sure you have all the required tools.
Never use power tools unless instructed.

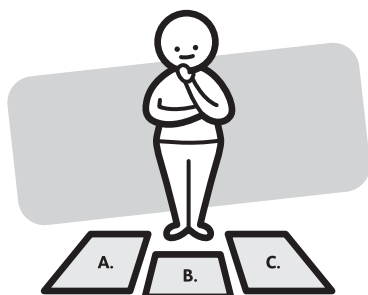

Identify and lay out all of the components before you begin assembly.

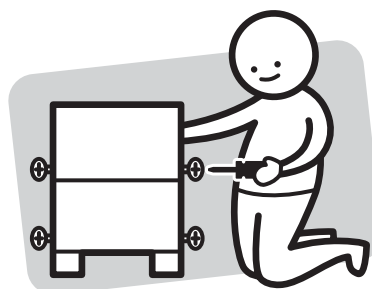

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE

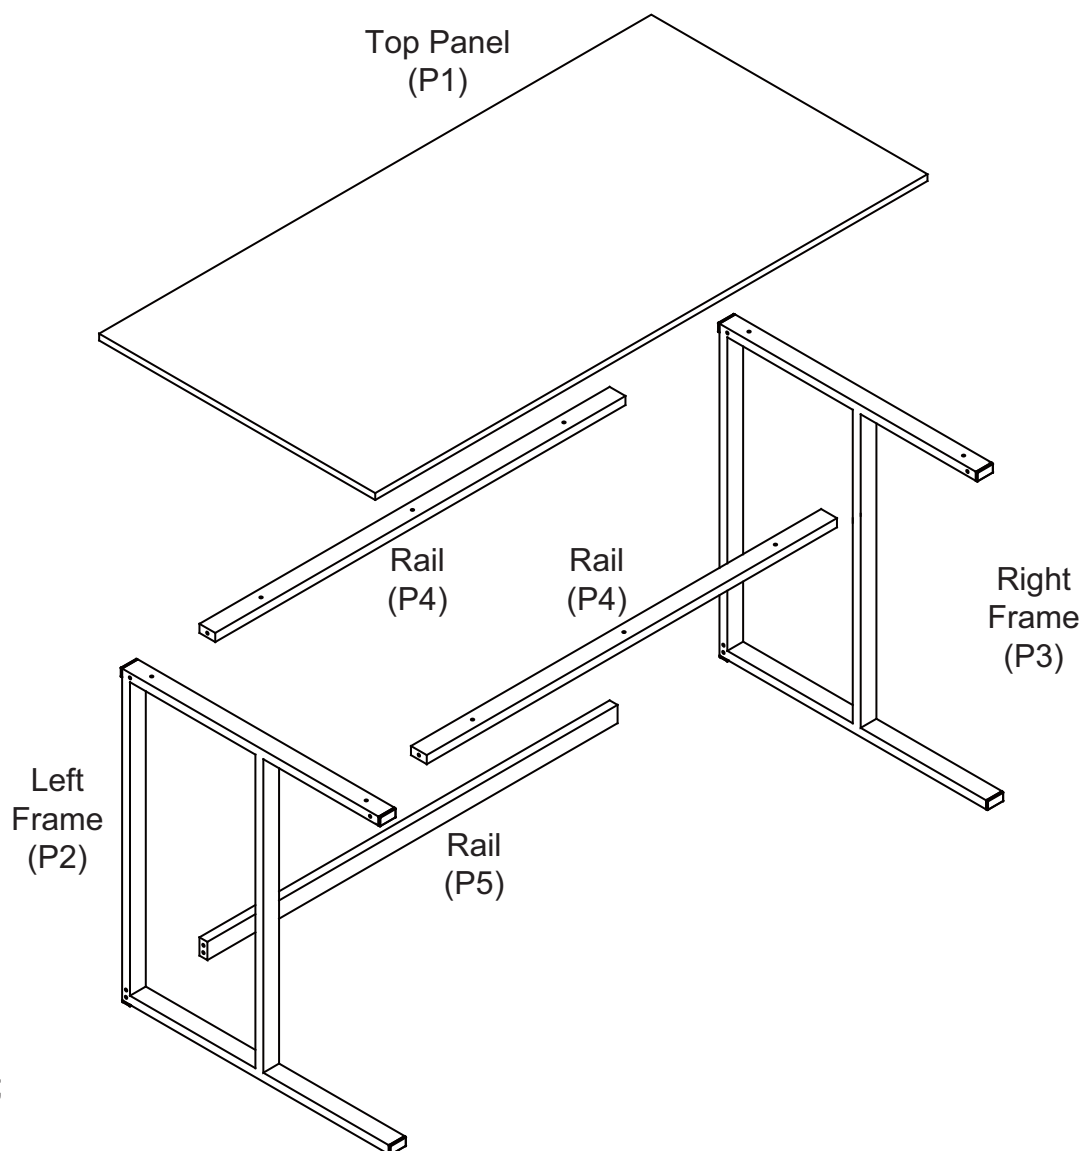

Parts list

Box 1: Top Panel (P1);
Left Frame (P2);
Right Frame (P3);
2 x Rails (P4);
Rail (P5);

Hardware



8 x Long Bolts
(H1)



10 x Bolts
(H2)






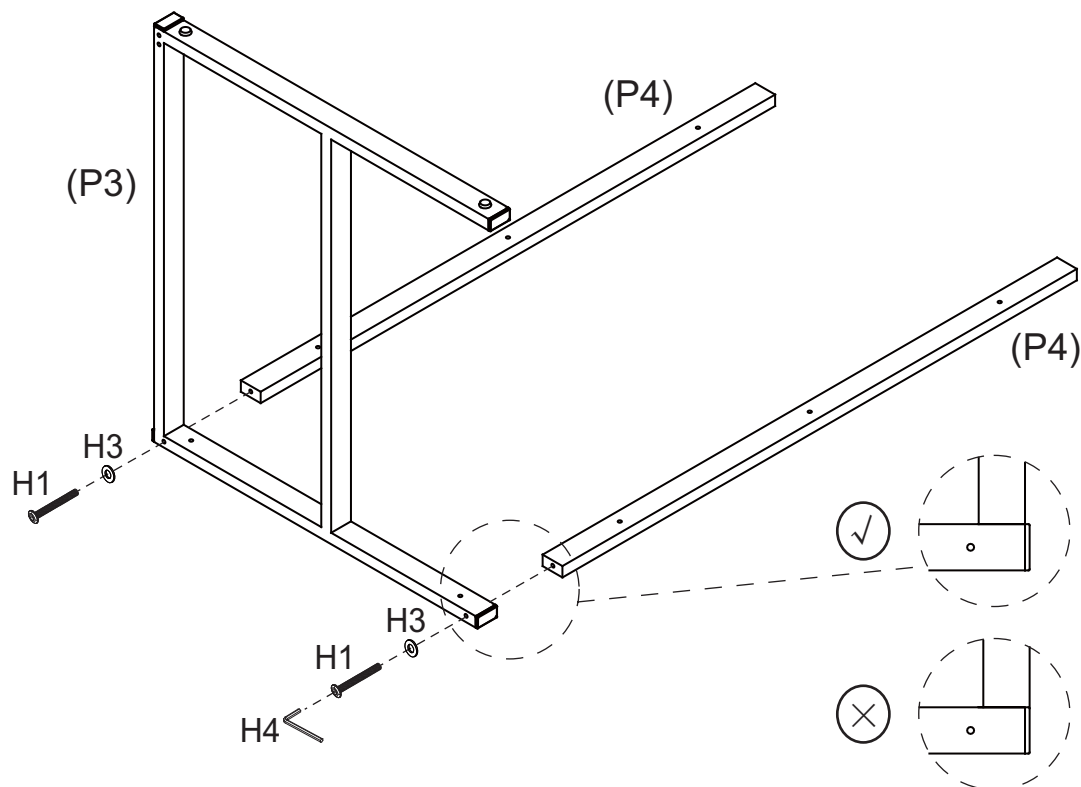
18 x Washers
(H3)



1 x Allen Key
(H4)




Step 1


You will need	
	
2 x Long Bolts (H1)	2 x Washers (H3)
	
1 x Allen Key (H4)	



Attach Rails (P4) to Right Frame (P3) with 2 x Long Bolts (H1) and 2 x Washers (H3). Tighten the bolts using an Allen Key (H4). Do not fully tighten the bolts, leave a little loose at this stage.

Step 2

You will need	
	
2 x Long Bolts (H1)	2 x Washers (H3)
	
1 x Allen Key (H4)	

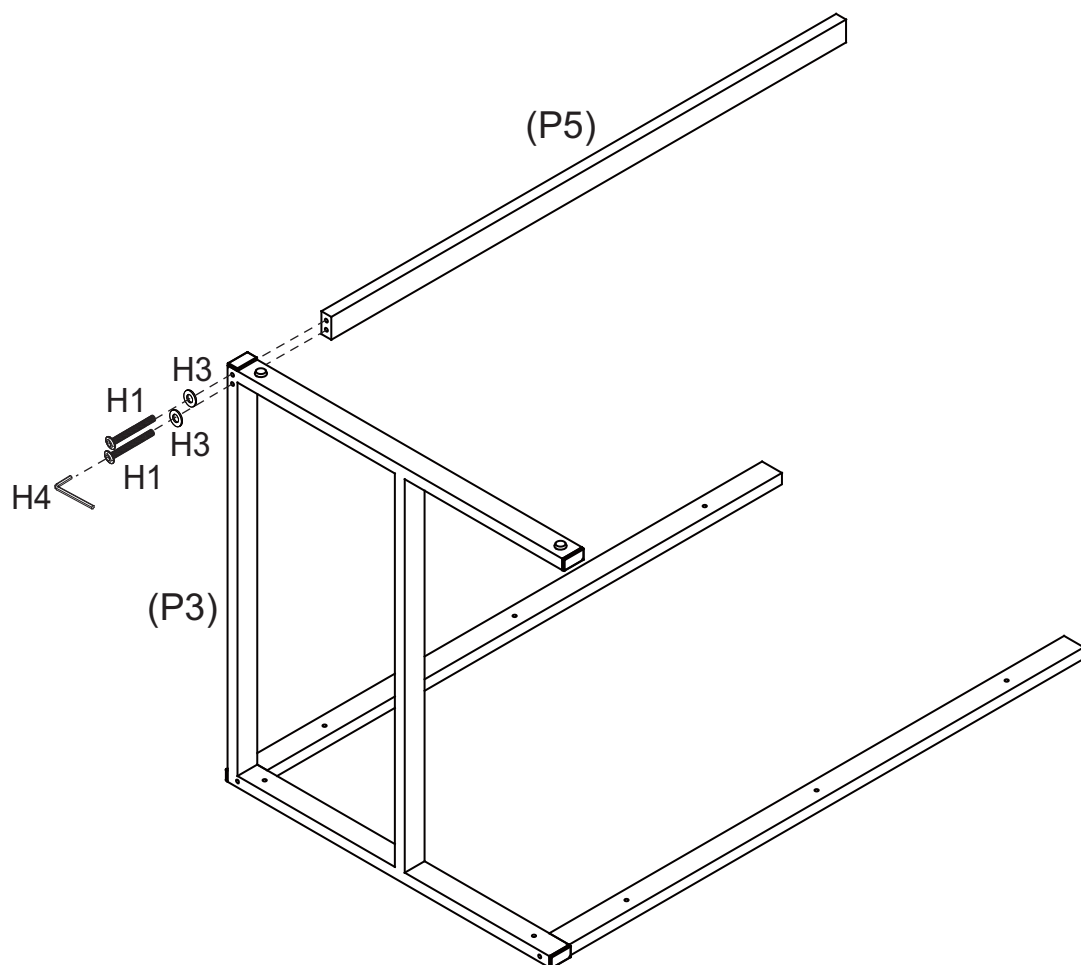




TWO PEOPLE



REQUIRED

Attach Rail (P5) to Right Frame (P3) with 2 x Long Bolts (H1) and 2 x Washers (H3). Tighten the bolts using an Allen Key (H4). Do not fully tighten the bolts, leave a little loose at this stage.


Step 3

You will need	
	
4 x Long Bolts (H1)	4 x Washers (H3)
	
1 x Allen Key (H4)	

TWO PEOPLE



REQUIRED

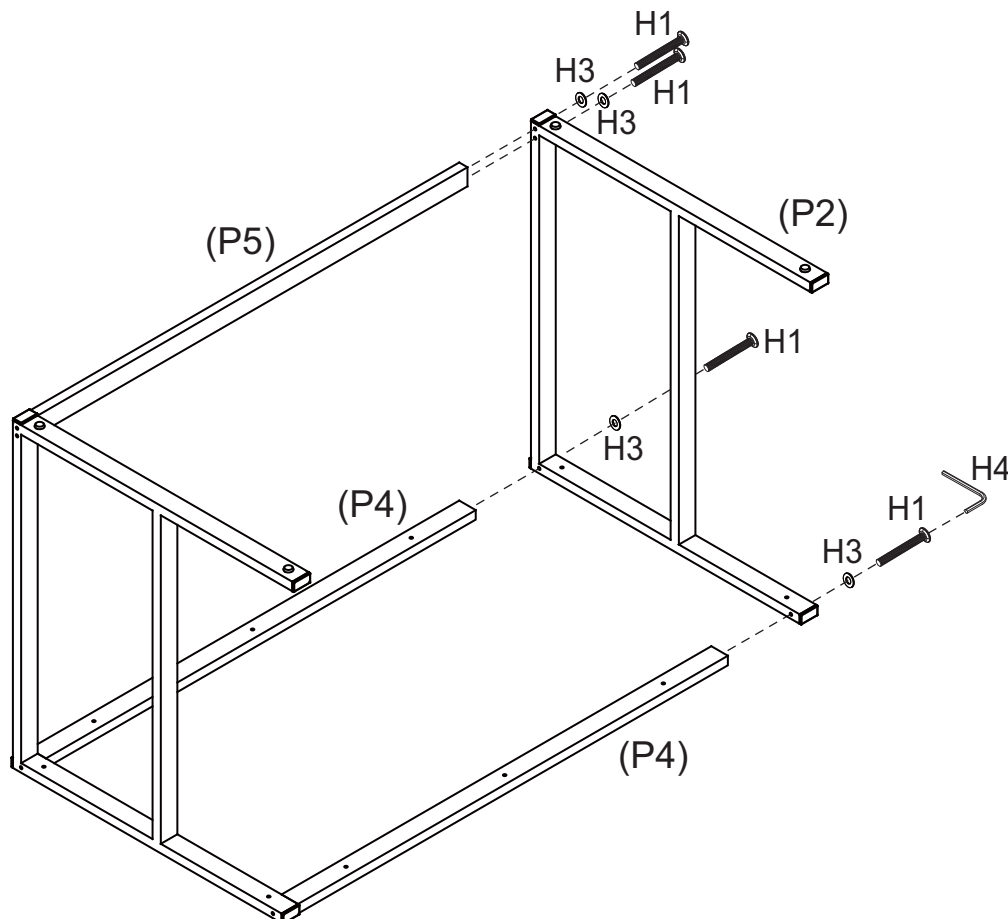




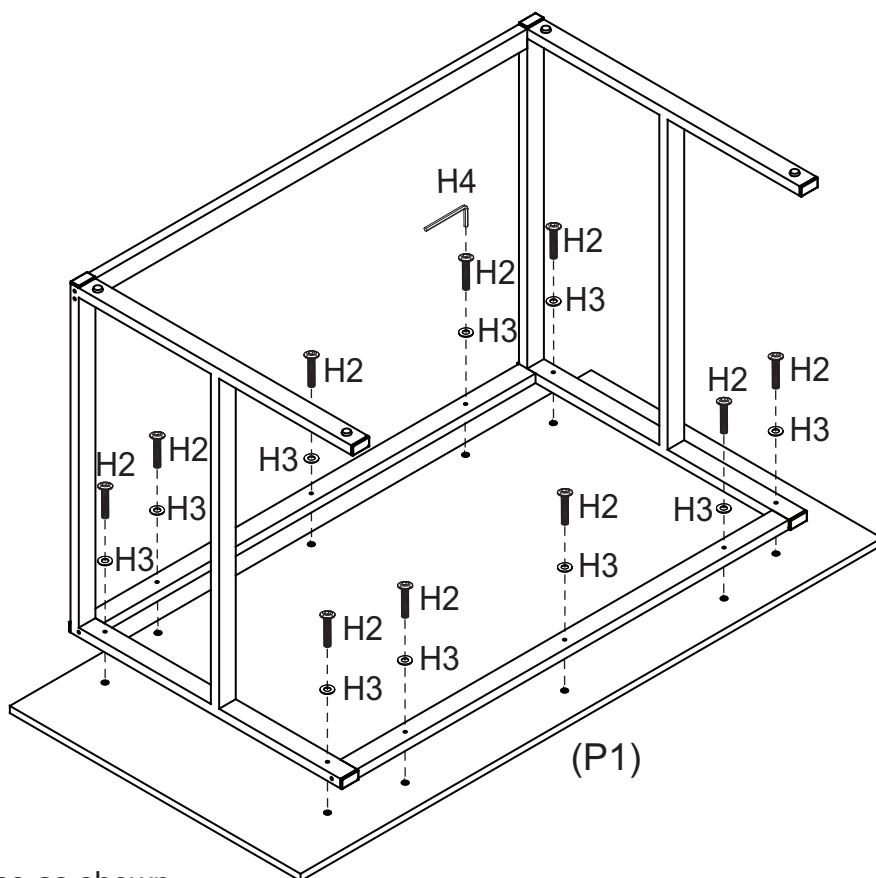
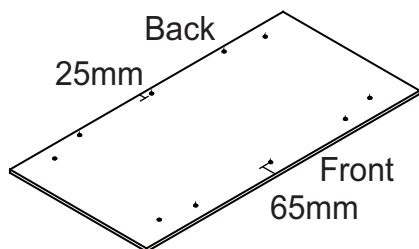
Attach Left Frame (P2) to Rails (P4, P5) with 4 x Long Bolts (H1) and 4 x Washers (H3).

Tighten the bolts using an Allen Key (H4).

Do not fully tighten the bolts, leave a little loose at this stage.

Step 4

You will need	
	
10 x Bolts (H2)	10 x Washers (H3)
	
1 x Allen Key (H4)	




Put Top Panel (P1) on a soft flat surface as shown.

Attach the frame to Top Panel (P1) with 10 x Bolts (H2)

and 10 x Washers (H3) using an Allen Key (H4).



Check and tighten all bolts.

Step 5

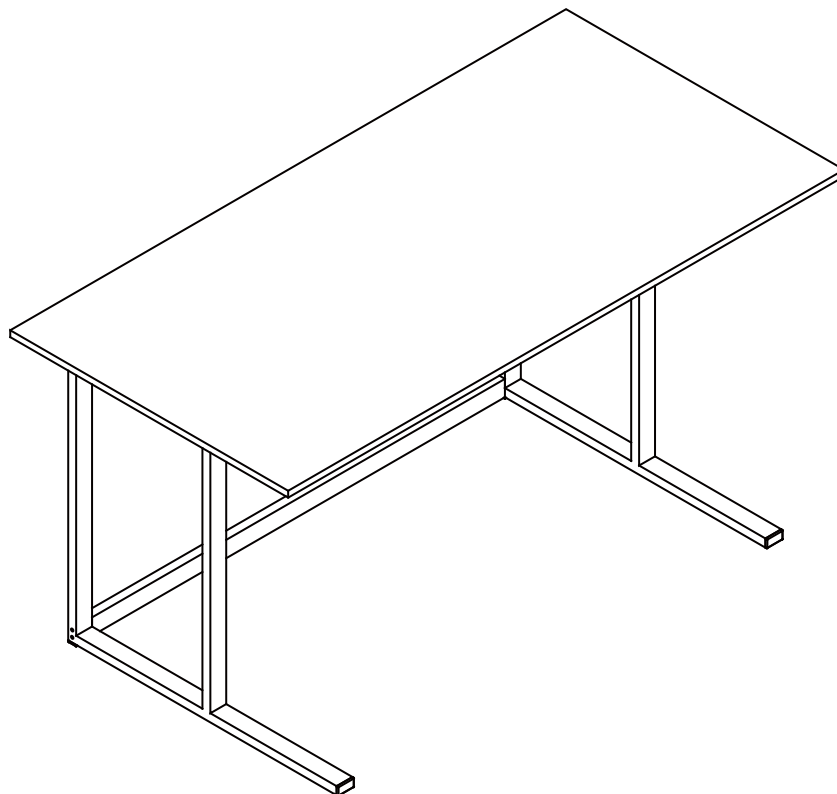

Gentle advise:

If the floor is uneven, please twist the adjustable feet to stabilize the table.

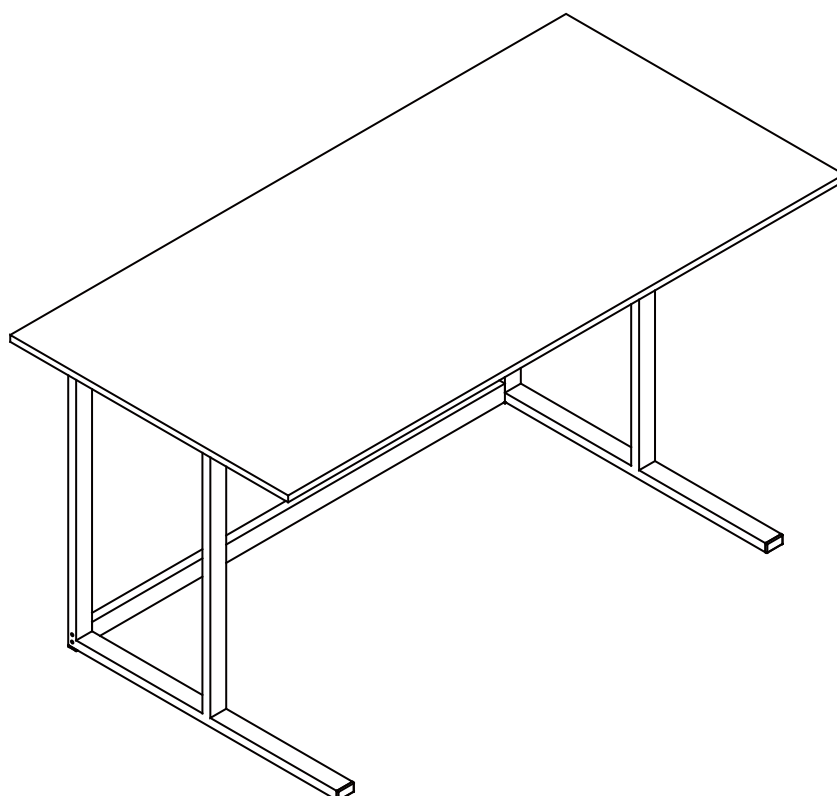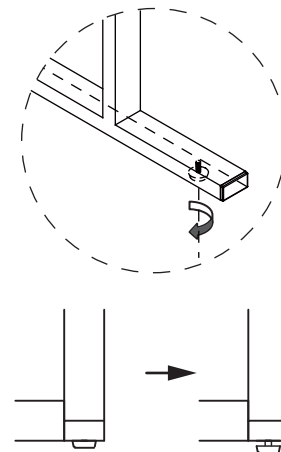

Recommended weight capacity : 50KG.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.