




**Fantastic
Furniture**

Version 1.0

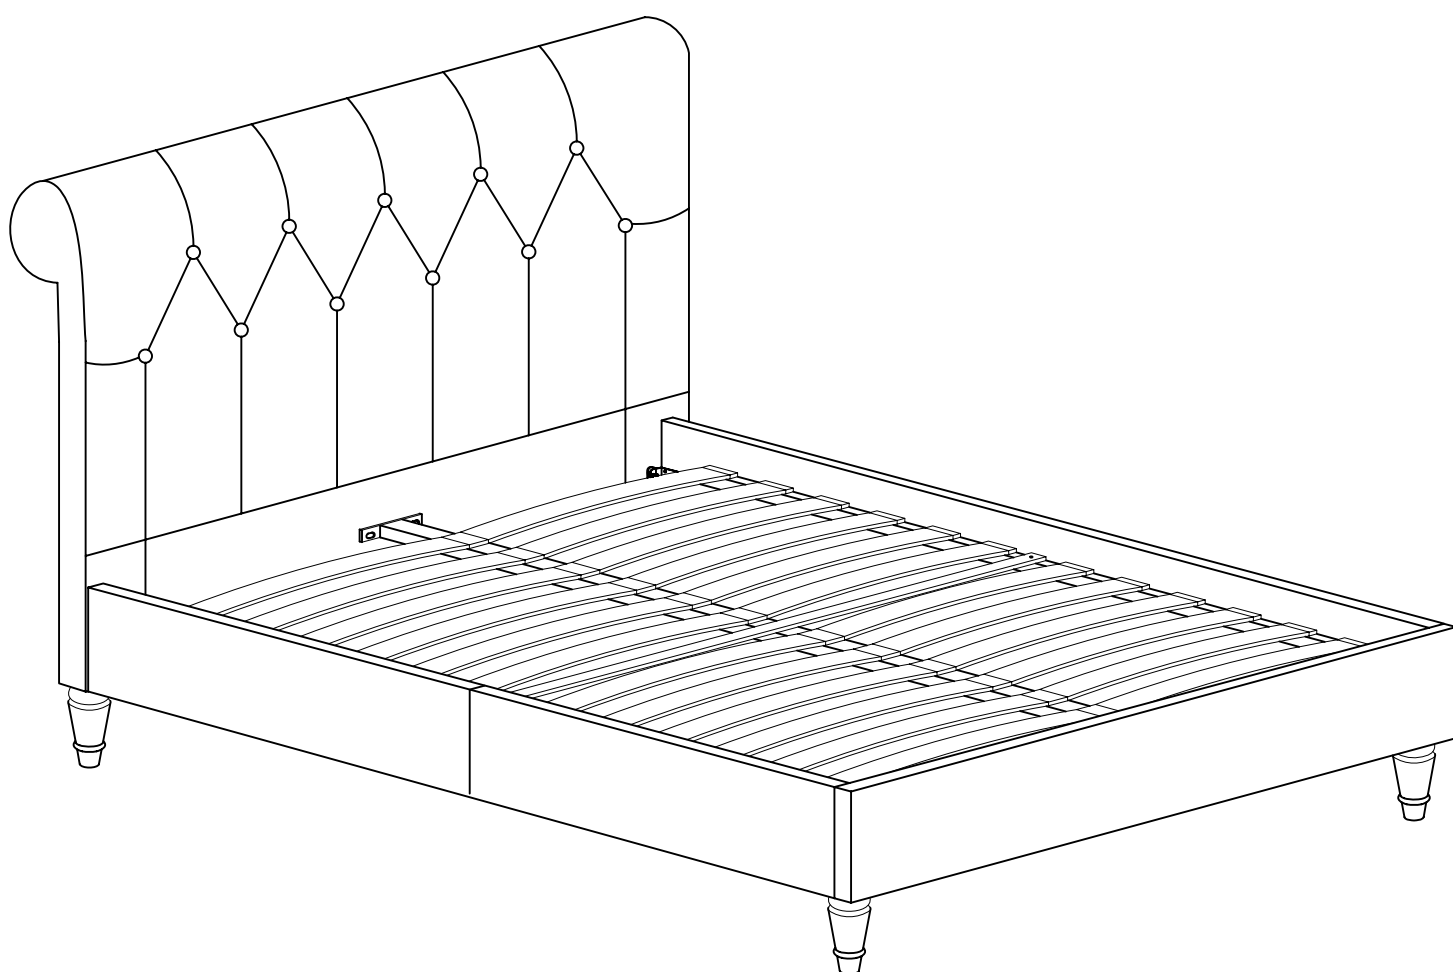

Two People



Required

Chester

Queen Bed

fantasticfurniture.com.au

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

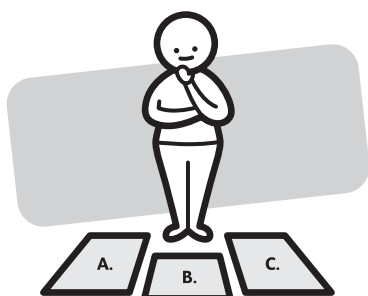

Identify and lay out all of the components before you begin assembly.

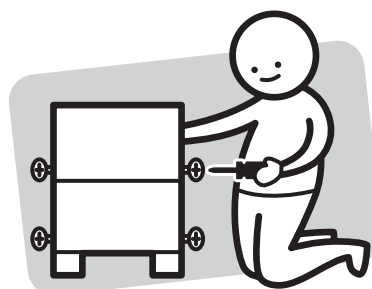

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE

Other tools you need:

Phillips head screwdriver;



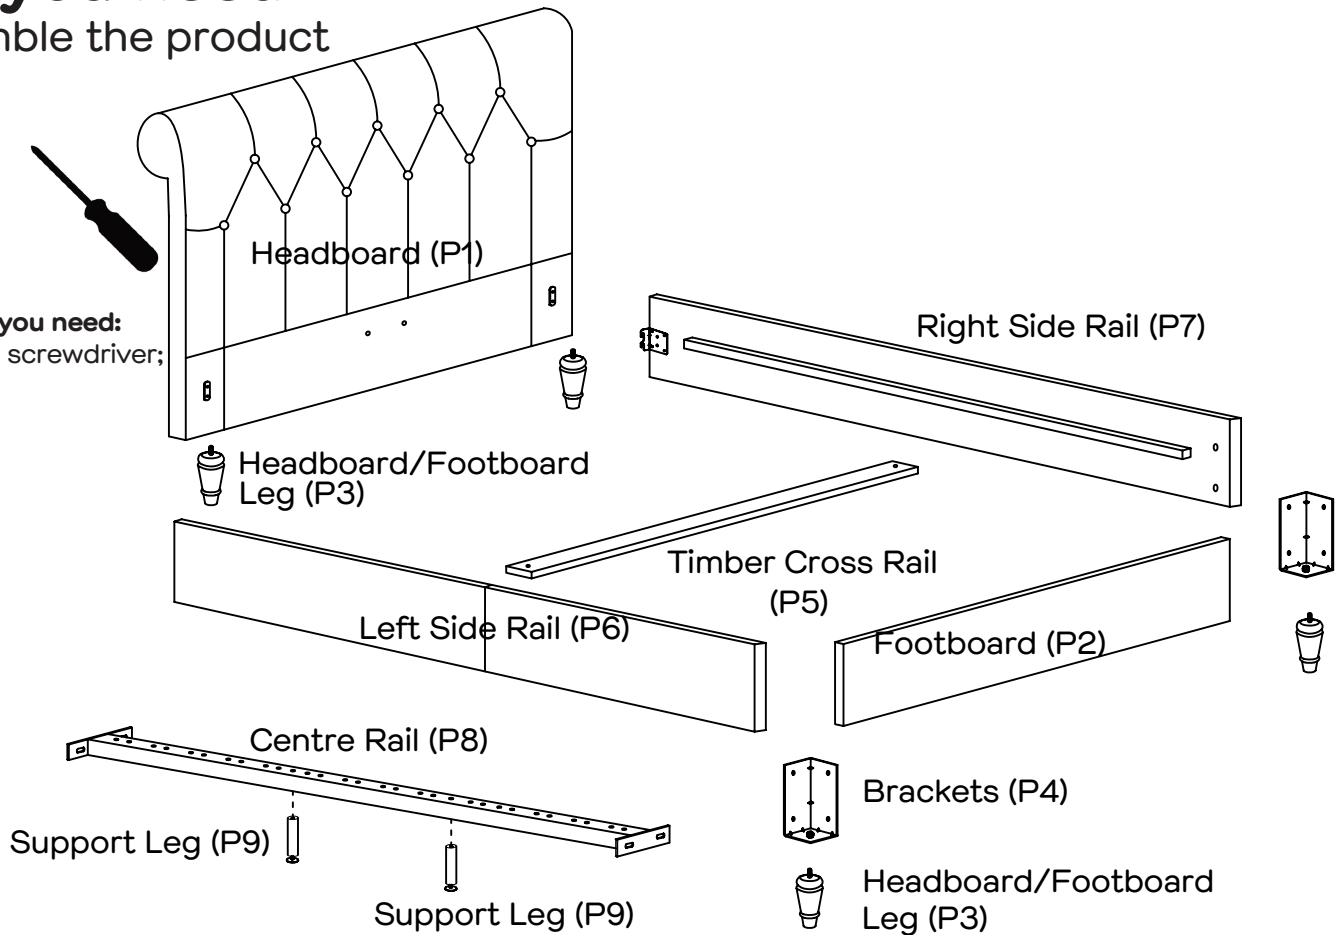


Parts list

Box 1 : Footboard (P2) ; 4 x Headboard/Footboard Legs (P3) ; 2 x Brackets (P4) ; Timber Cross Rail (P5) ; Left Side Rails (P6) ; Right Side Rail (P7) ; Centre Rail (P8) ; 2 x Support Legs (P9) ; End Connectors (P10) ; Centre Connectors (P11) ; Hardware Pack.

Box 2 : Headboard (P1) ; Slats (P12)

28 x End Connectors (P10) 14 x Centre Connectors (P11)

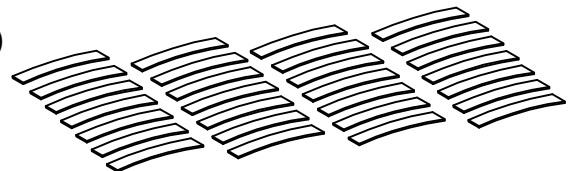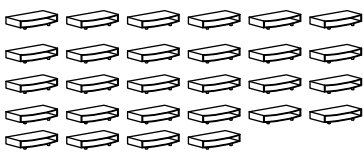


28 x Slats (P12)

Hardware pack



(Bolt)
4 x M8 x 16mm
(H1)



1 x M5 (Allen Key)
(H2)




(Bolt)
14 x M8 x 25mm
(H3)



(Washer)
14 x M8 x 19mm
(H4)



(Screw)
2 x M4 x 32mm
(H5)





(Felt Pad)
1 x 40 x 20mm
(H6)



(Spring Washer)
4 x M8
(H7)

Step 1


Two People

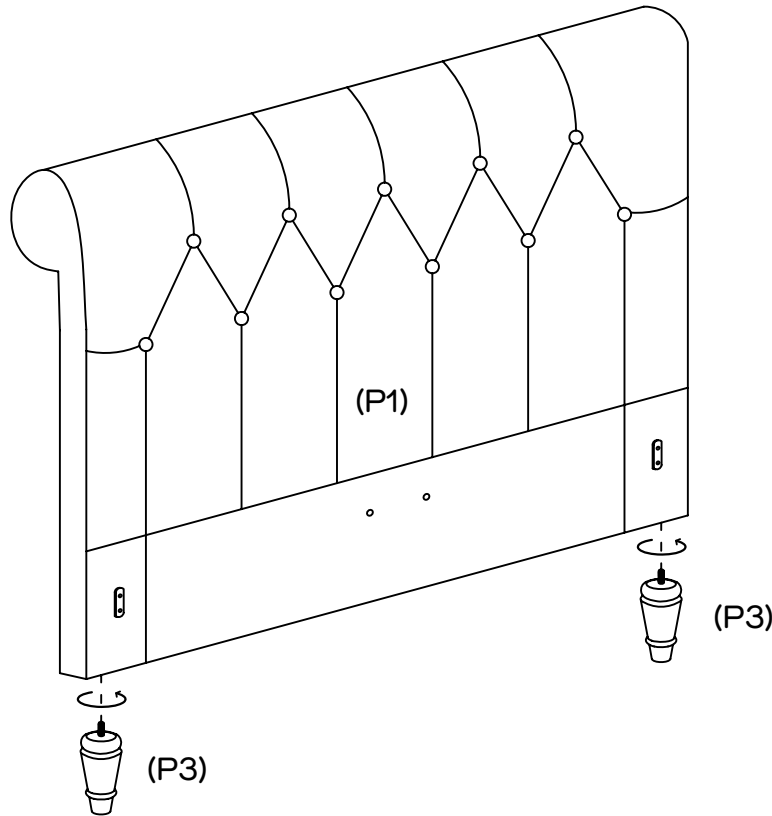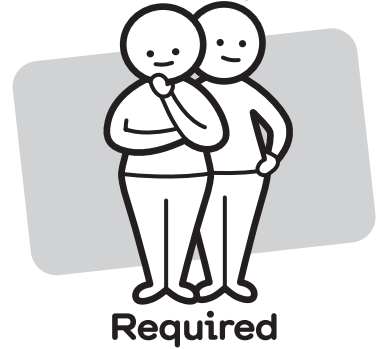

Attach 2 x headboard legs (P3) to the bottom of headboard (P1) and rotate as shown.

Step 2

You will need		
Allen Key (H2)	4 x Bolts 25mm (H3)	4 x Washers M8 (H4)

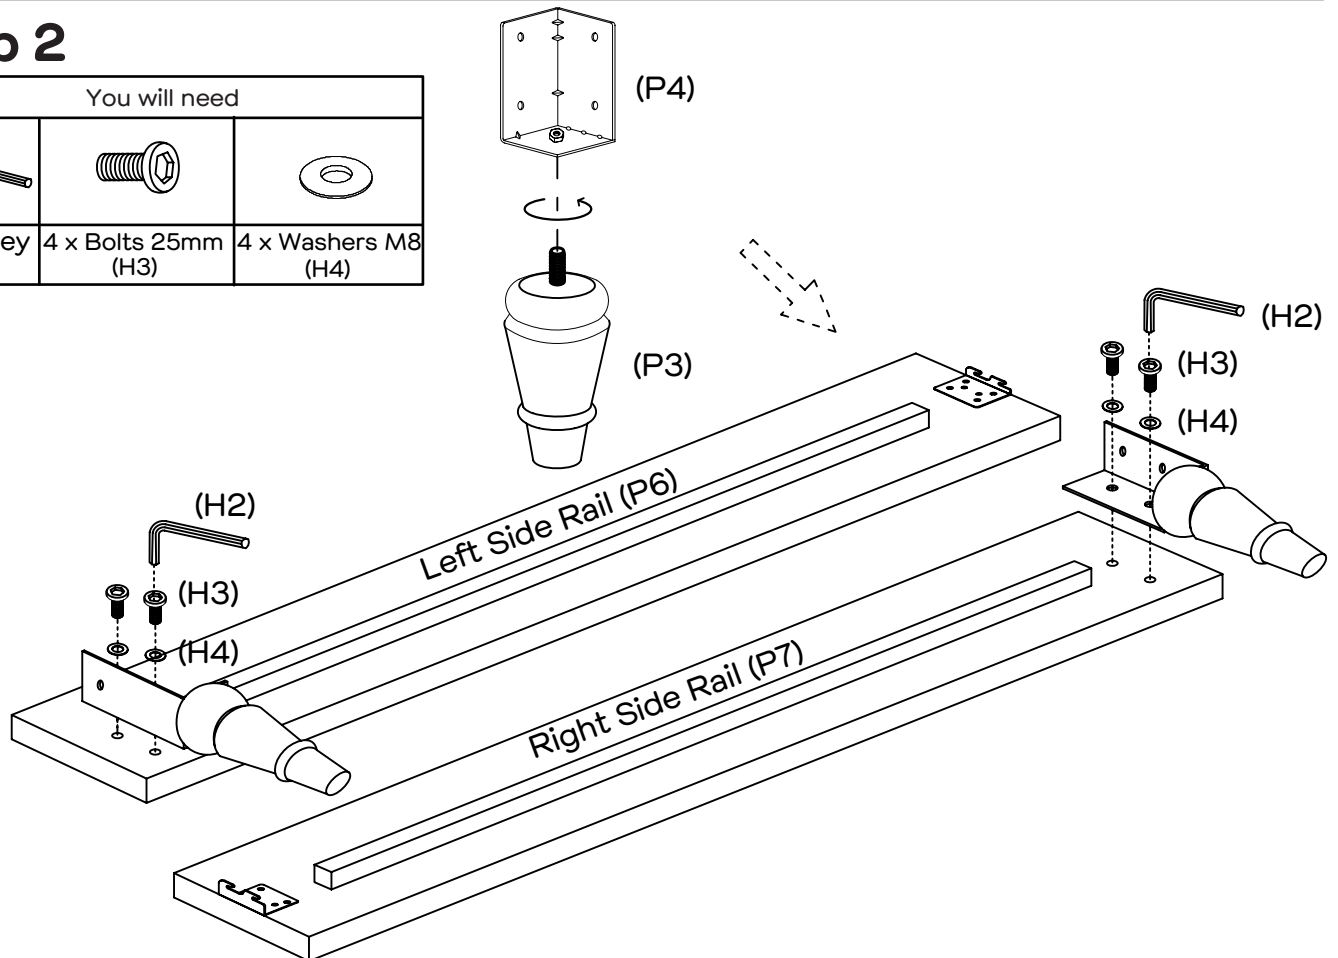






Attach footboard legs (P3) to the bottom of the bracket (P4) and rotate as shown. Then, attach brackets (P4) to the left side rail (P6) with 2 x bolts (H3) and 2 x washers (H4) by using the allen key (H2). Repeat for the right side rail (P7). Do not fully tighten the bolts (H3) until step 7.

Step 3

Two People




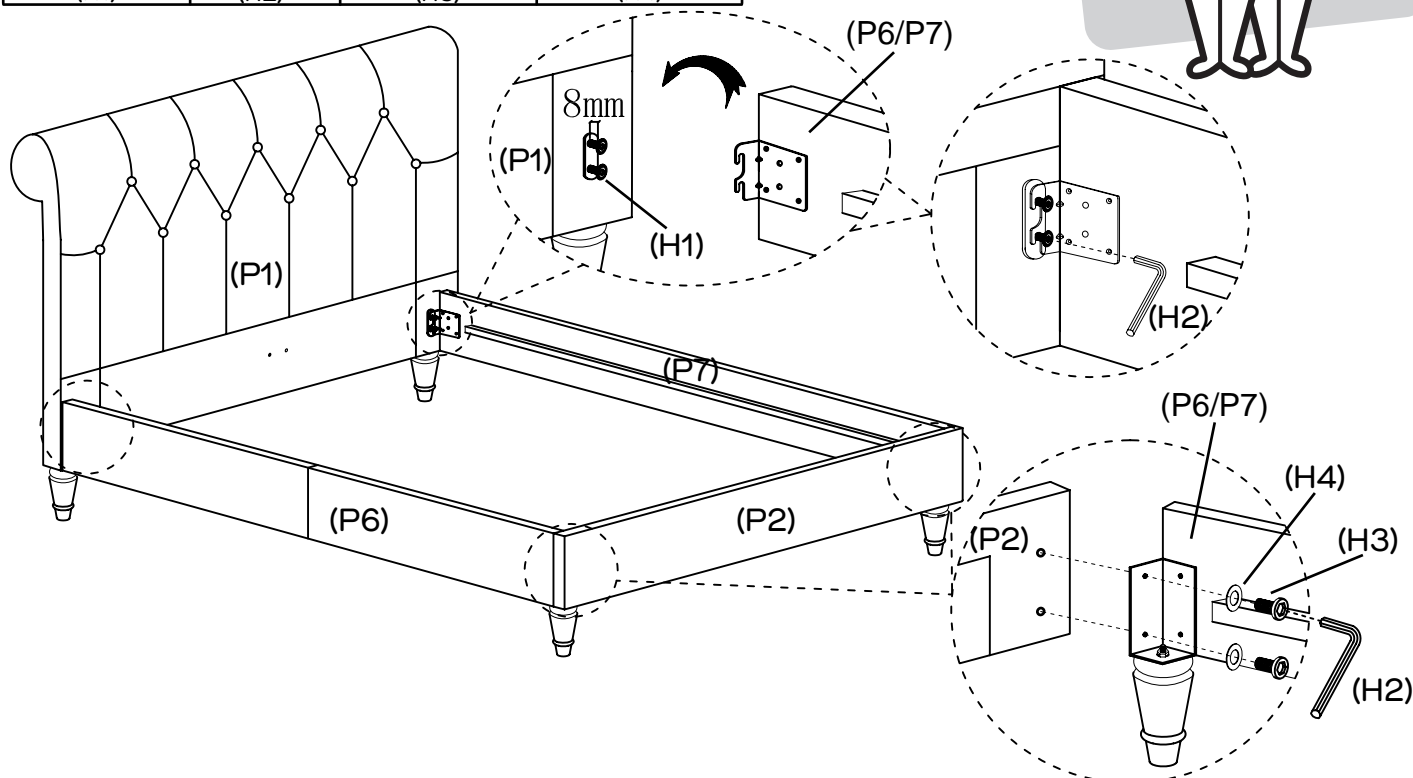


You will need			
			
4 x Bolts 16mm (H1)	Allen Key (H2)	4 x Bolts 25mm (H3)	4 x Washers M8 (H4)



Install 4 x bolts (H1) to the brackets of headboard (P1) by using allen key (H2) as shown, do not tighten the bolts and keep them 8mm loose. Then attach the side rails (P6/P7) to the headboard (P1) over the bolts (H1) as shown. Finally, attach the side rails (P6/P7) to the footboard (P2) with 4 x bolts (H3) and 4 x washers (H4) by using the allen key (H2). Do not fully tighten the bolts (H3) until step 7.

Step 4

You will need		
		
Allen Key (H2)	2 x Bolts 25mm (H3)	2 x Washers M8 (H4)

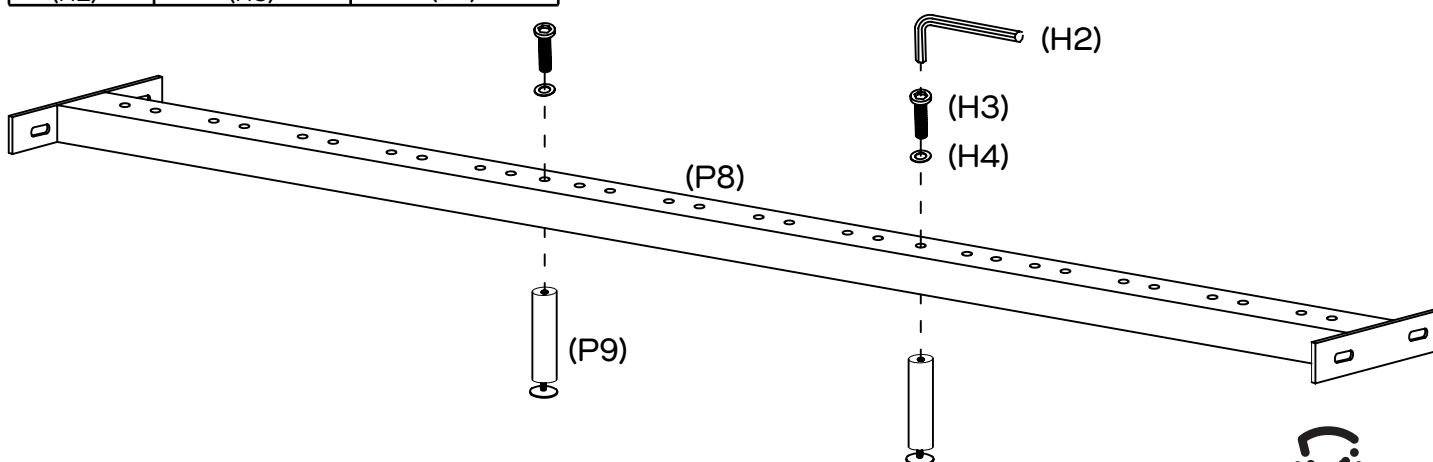





Attach 2 x support legs (P9) to the centre rail (P8) with 2 x bolts (H3) and 2 x washers (H4) by using allen key (H2).


fantasticfurniture.com.au



**Fantastic
Furniture**




Step 5

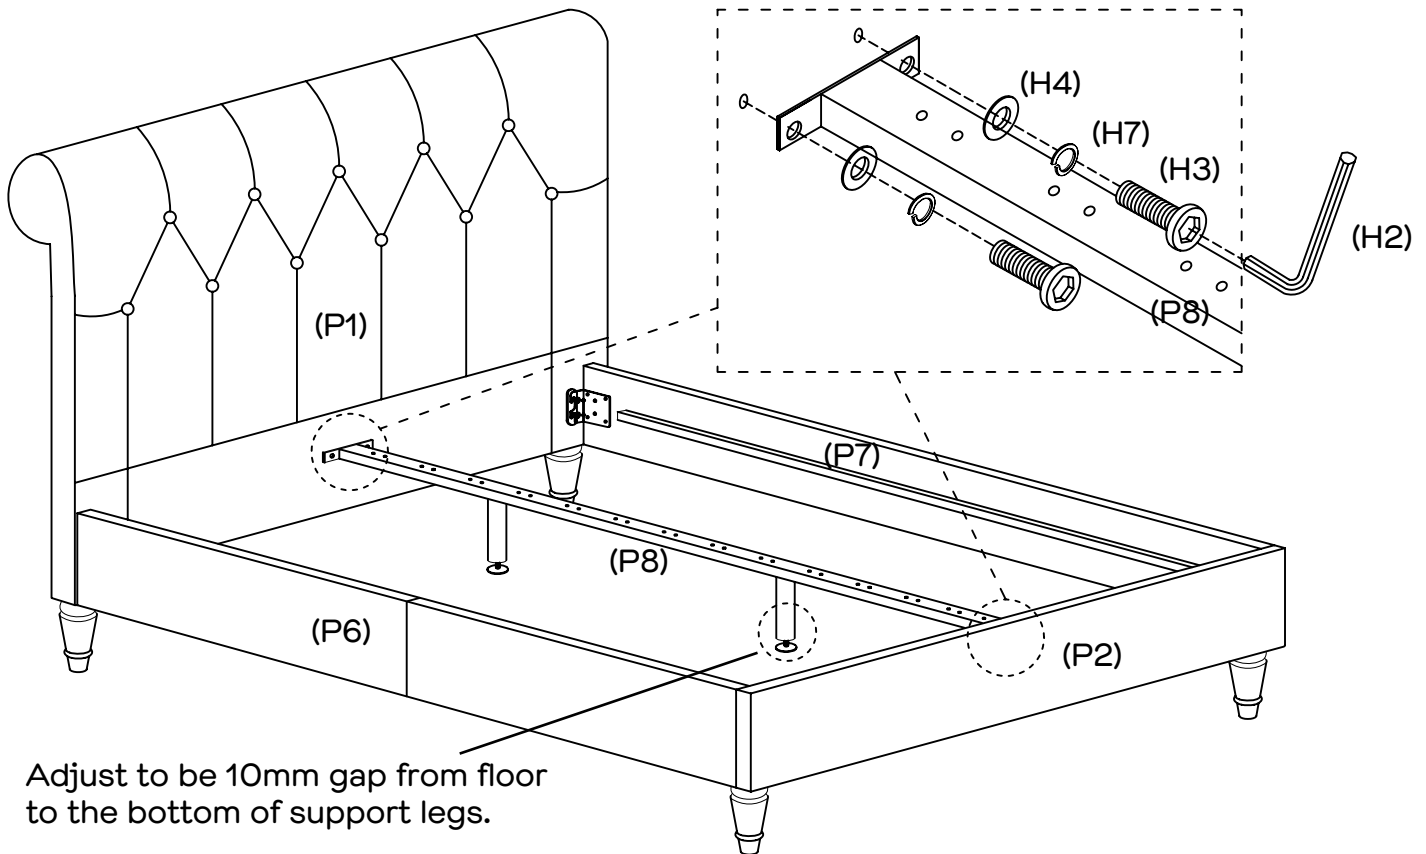
You will need			
			
Allen Key (H2)	4 x Bolts 20mm (H3)	4 x Washers M8 (H4)	4 x Spring Washer (H7)



Slot the centre rail (P8) into the headboard (P1) and footboard (P2).
Rotate 4 x bolts (H3), 4 x washers (H4) and 4 x spring washers (H7) to the headboard (P1) and footboard (P2) by using alley key (H2). No need to tighten bolts until step 7.


Step 6

You will need	
	
28 x End Connectors (P10)	14 x Centre Connectors (P11)
	
28 x Slats (P12)	

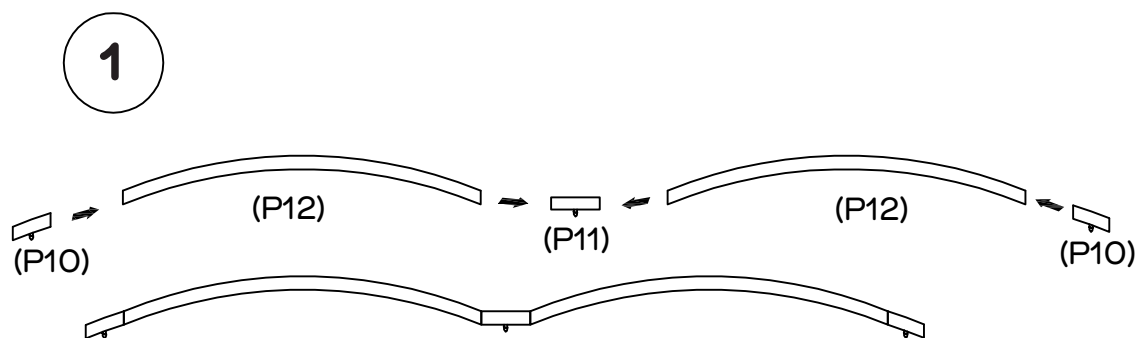


Push 2 end connectors (P10), 2 pcs slats (P12) and a centre connector (P11) together.

2

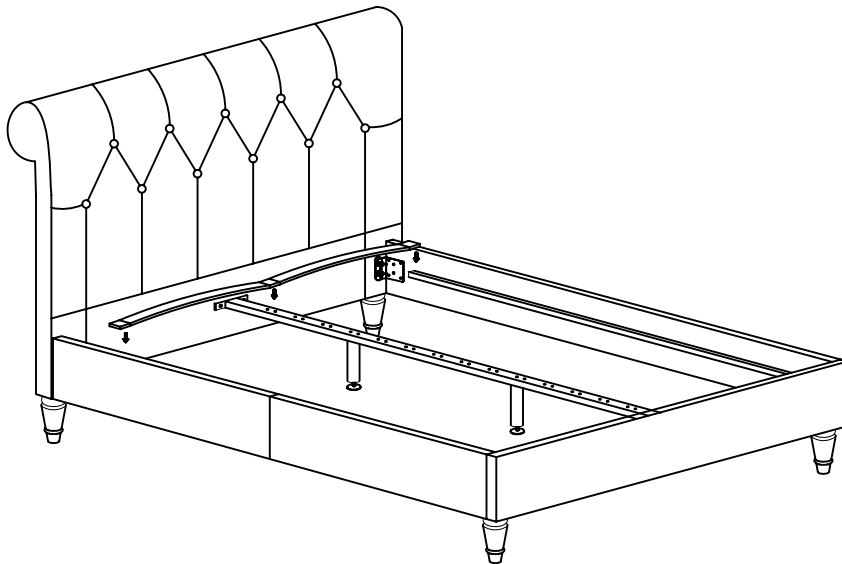


Insert the full slat into the side rail and centre rail one by one.

3

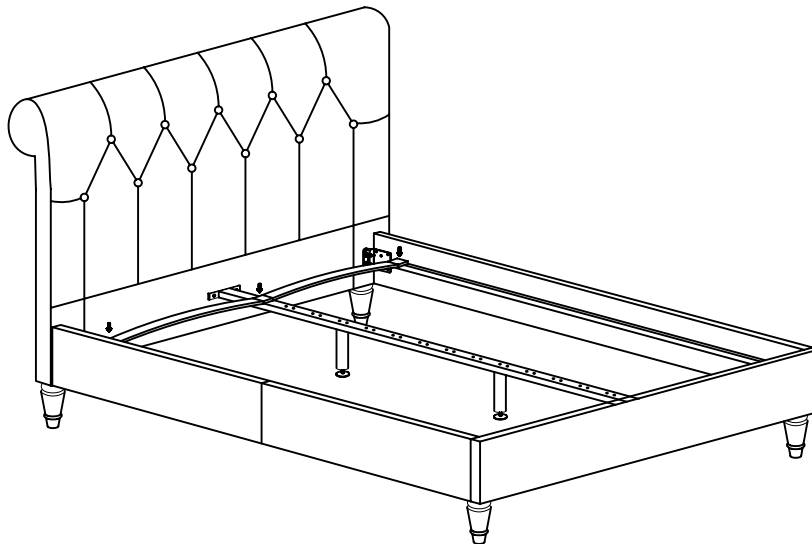




Sometimes it makes it easier to line up the hole if you press down in the middle of the slat to flatten it out.


4

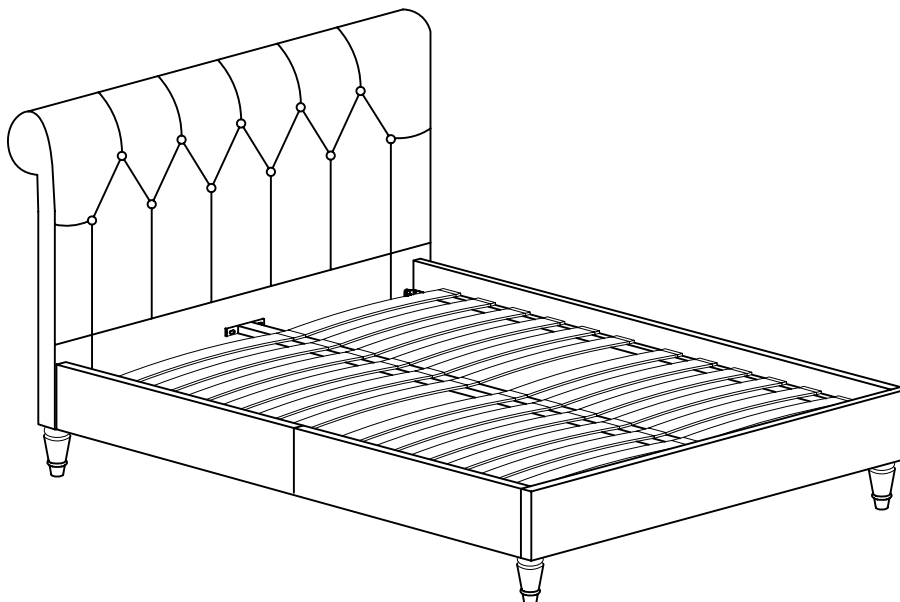

Repeat for every bed slat until finished.

Step 7

You will need	
	
Allen Key (H2)	2 x Screws 32mm (H5)
	
Felt Pad 1 x 40 x 20mm (H6)	Phillips head Screwdriver (not provided)

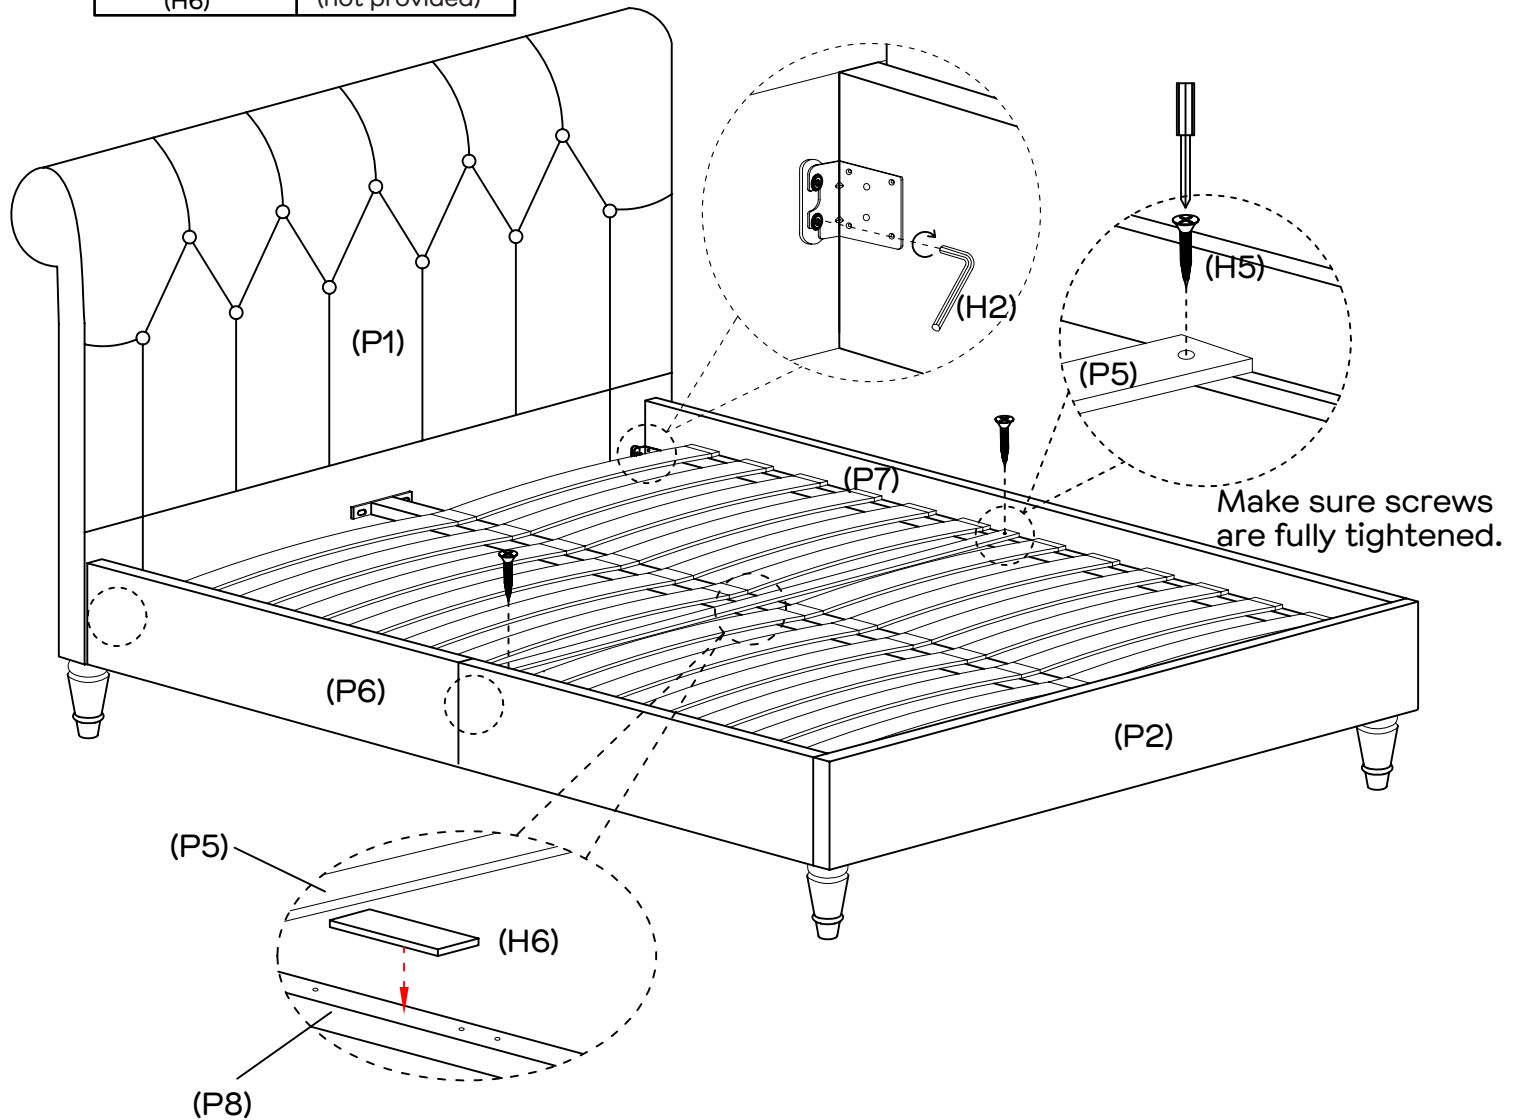


Make sure the inner space is square.

Attach the felt pad (H6) to the centre of centre rail (P8).

Then attach the timber cross rail (P5) to the centre of side rails (P6/P7) by using 2 x screws (H5). Now tighten all the bolts on the centre rail (P8) and tighten bolts on the headboard (P1), footboard (P2) and side rails (P6/P7).

Step 8

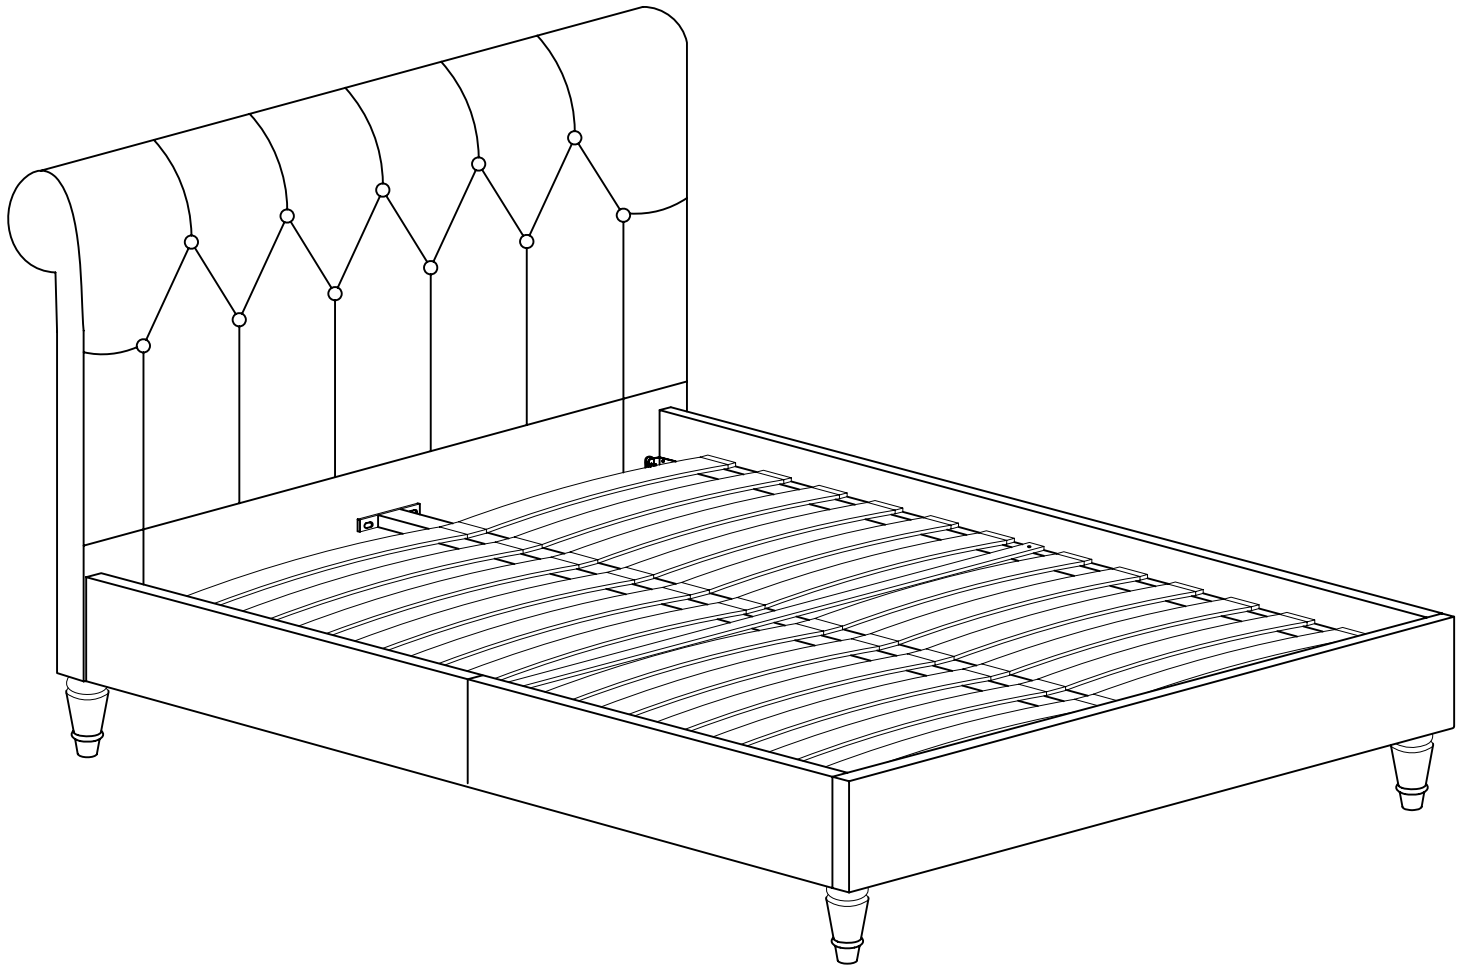


Job complete!

In the interest of our environment please dispose of all packaging thoughtfully.



**Fantastic
Furniture**

Version 1.0

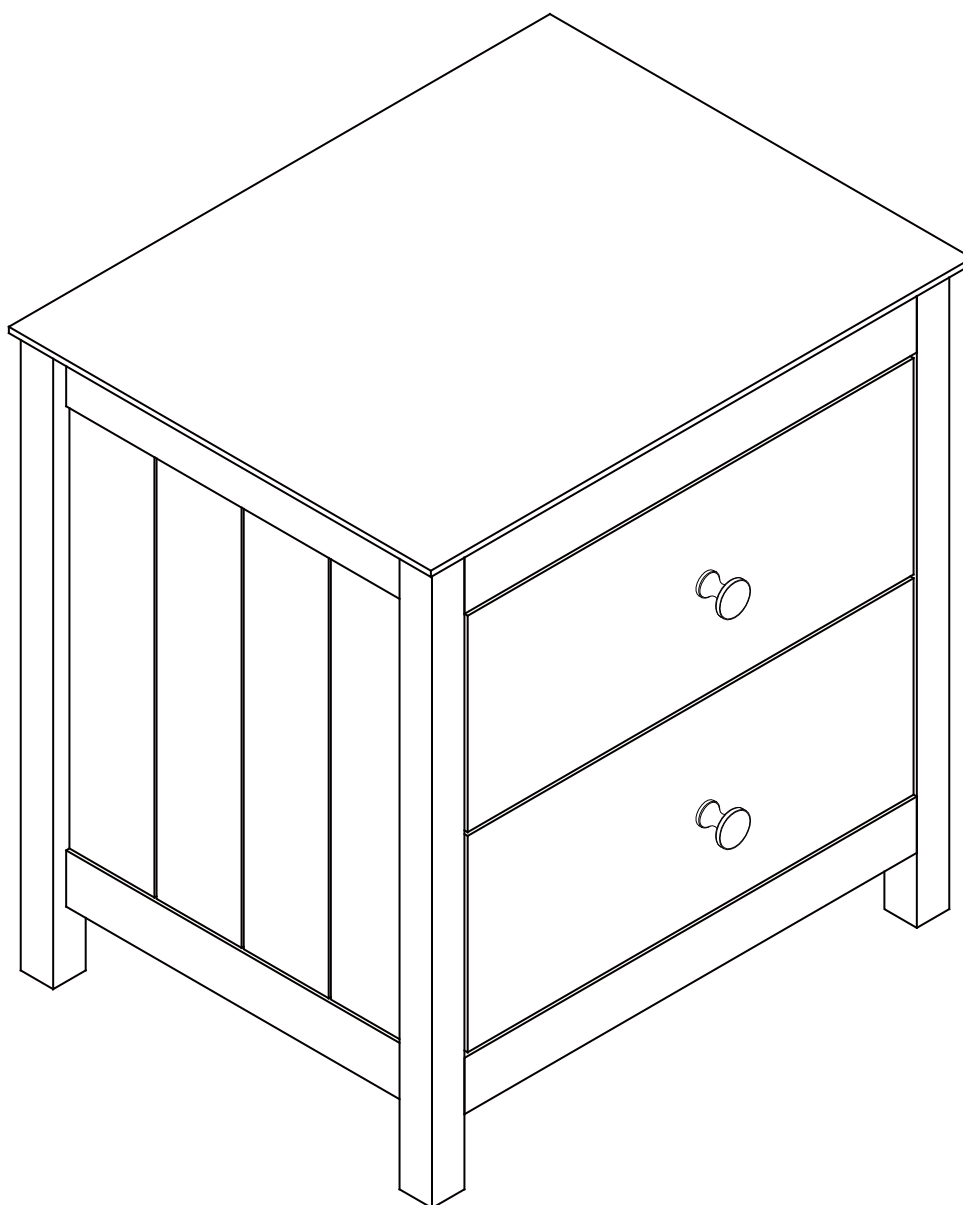

Hamilton

Bedside 2 Drawer

fantasticfurniture.com.au

Recommended weight capacity : 50kgs on top.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

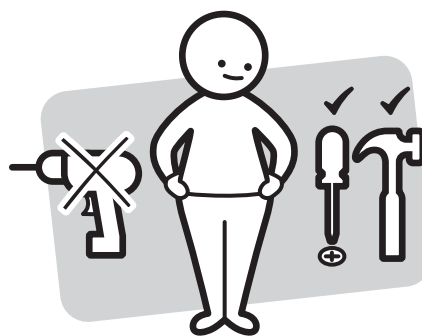

Make sure you have all the required tools. Never use power tools unless instructed.

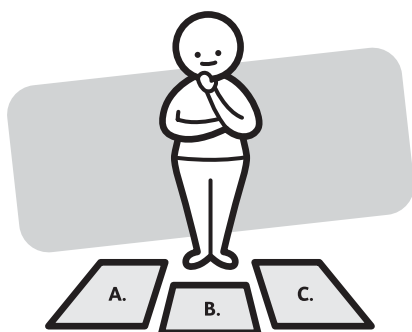

Identify and lay out all of the components before you begin assembly.

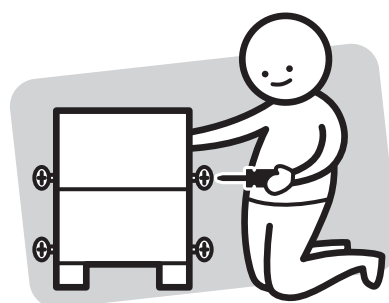

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE




Other tools you need:
Phillips head screwdriver;

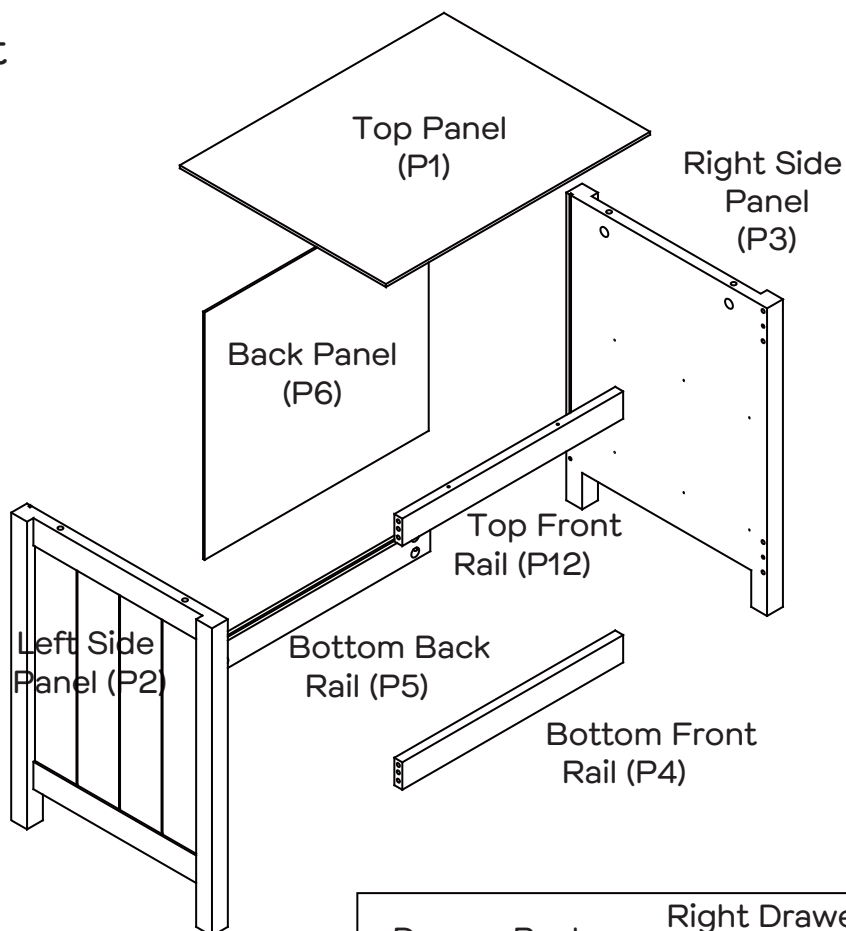












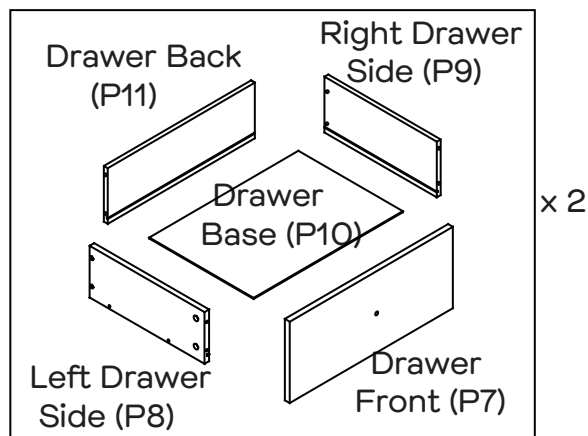


Parts list





Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
Bottom Front Rail (P4);
Bottom Back Rail (P5);
Back Panel (P6);
2 x Drawer Fronts (P7);
2 x Left Drawer Sides (P8);
2 x Right Drawer Sides (P9);
2 x Drawer Bases (P10);
2 x Drawer Backs (P11);
Top Front Rail (P12)


Hardware pack



						
8 x Dowels (H1)	8 x Medium Screws (H2)	20 x Cam Bolts (H3)	20 x Cam Nuts (H4)	20 x Small Screws (H5)	2 x CL Runner Tracks (H6)	2 x CR Runner Tracks (H7)
						
2 x DL Runners (H8)	2 x DR Runners (H9)	2 x Handle (H10)	2 x Handle Bolt (H11)	4 x Wedges (H12)	4 x Wedge Screws (H13)	2 x Long Screws (H14)



Step 1


You will need	
	
12 x Small Screws (H5)	2 x CL Runner Tracks (H6)
	
2 x CR Runner Tracks (H7)	Phillips Head Screwdriver

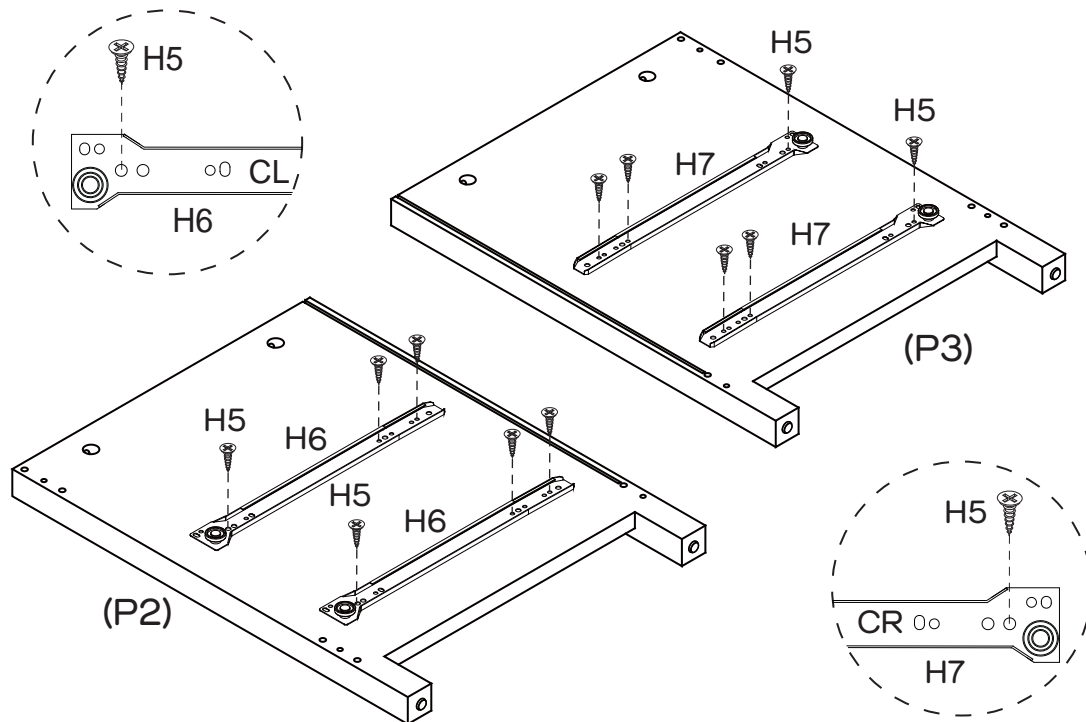

Attach 2 x CL RunnerTracks (H6) and 2 x CR Runner Tracks (H7) to Left&Right Side Panels (P2&P3) with 12 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.




Step 2

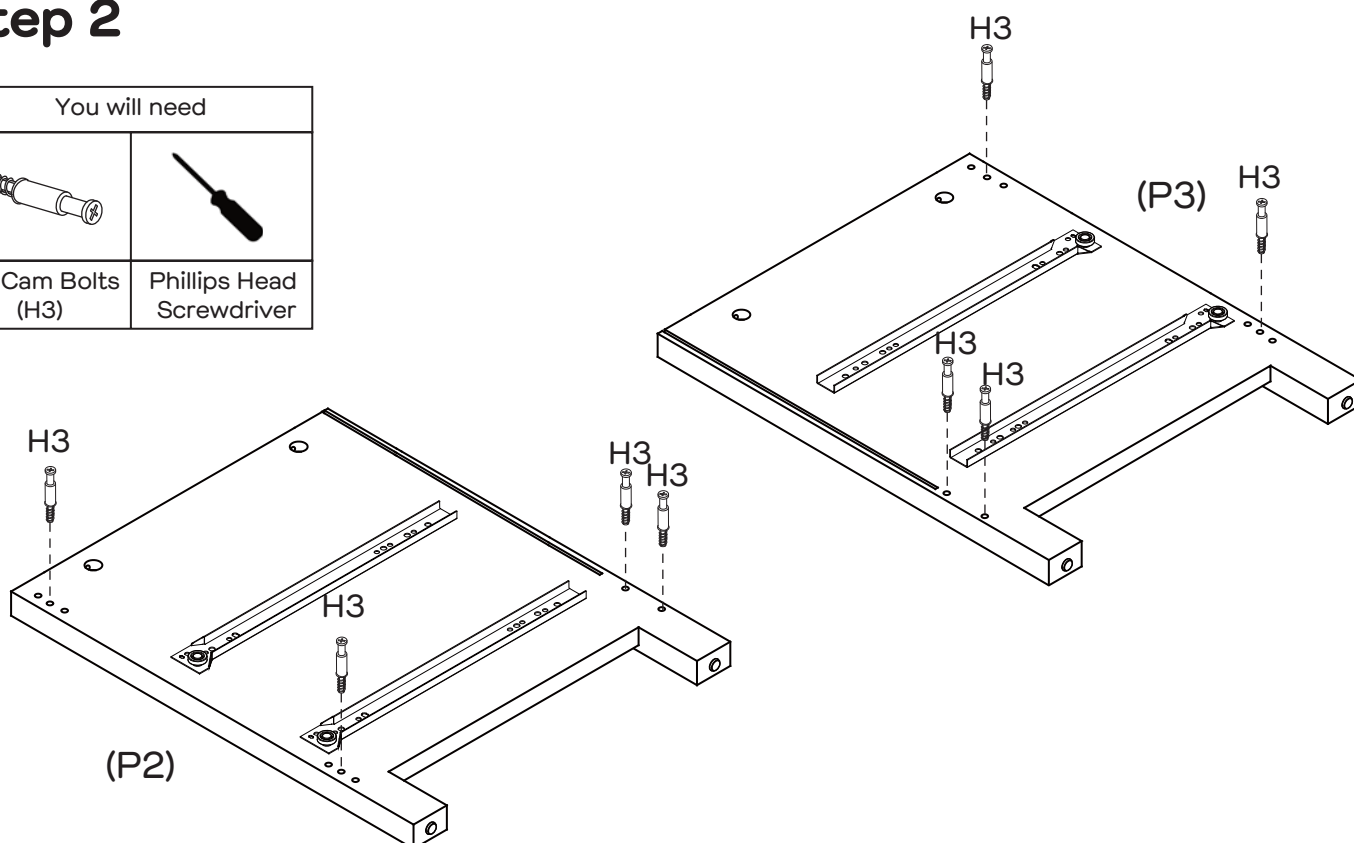You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver




Attach 8 x Cam Bolts (H3) to Left&Right Side Panels (P2&P3) by tightening with the Phillips Head Screwdriver.


Step 3

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

This is how a cam nut works.....




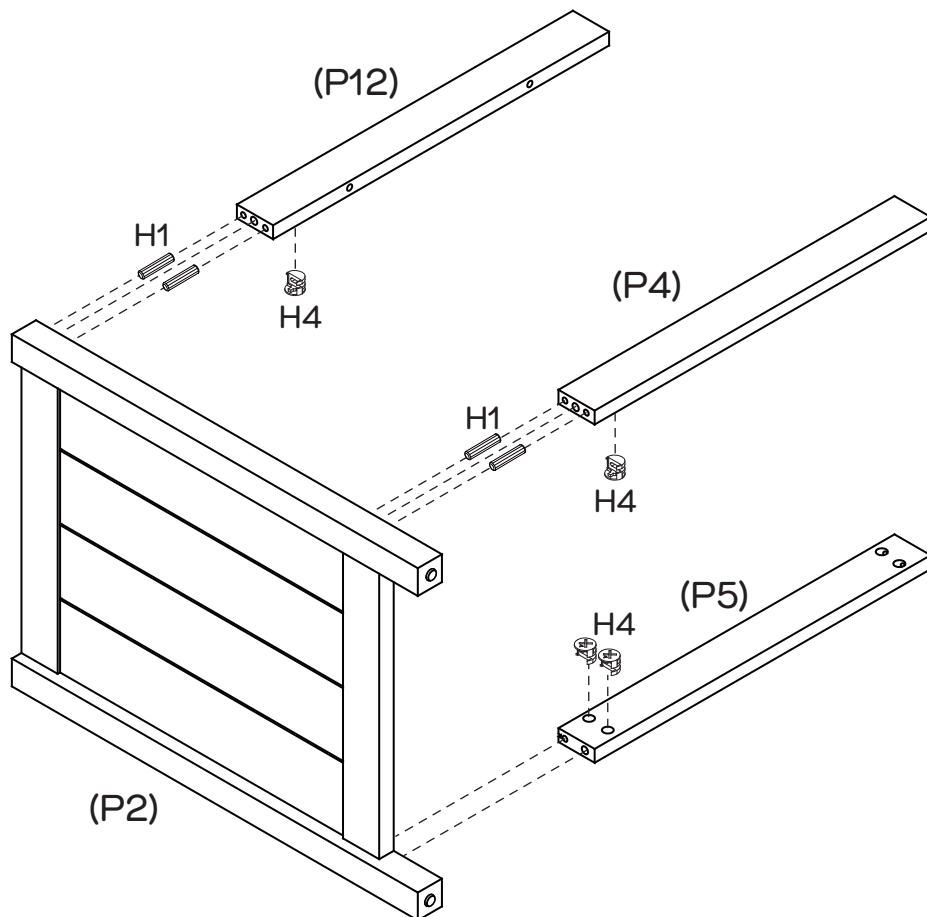


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Insert 4 x Dowels (H1) into Left Side Panel (P2). Insert 4 x Cam Nuts (H4) into Rails (P4&P5&P12) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Rails (P4&P5&P12) to Left Side Panel (P2) by tightening all cam nuts with the Phillips Head Screwdriver.


Step 4

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

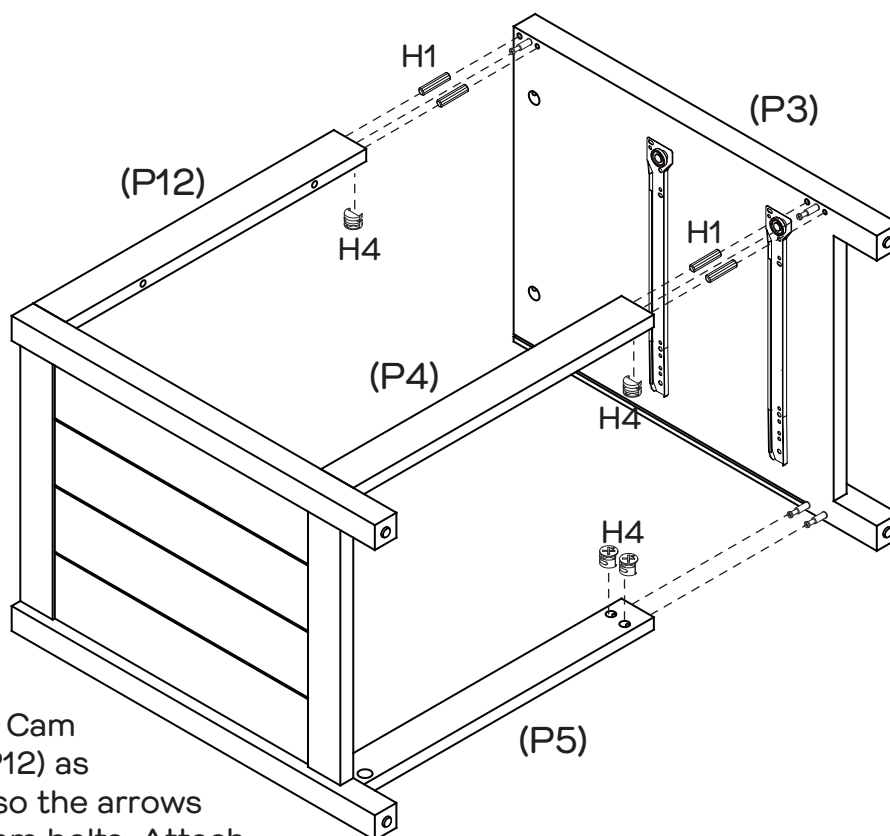

Insert 4 x Dowels (H1) and 4 x Cam Nuts (H4) into Rails (P4&P5&P12) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Right Side Panel (P3) to Rails (P4&P5&P12) by tightening all cam nuts with the Phillips Head Screwdriver.


Step 5

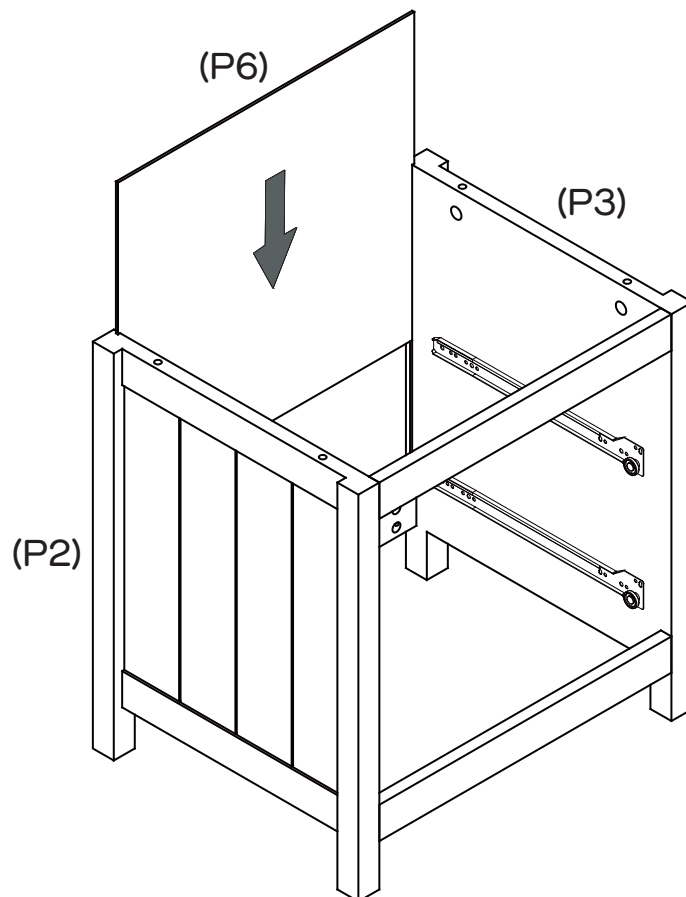

Slide Back Panel (P6) into the grooves of Left&Right Side Panels (P2&P3).




Step 6


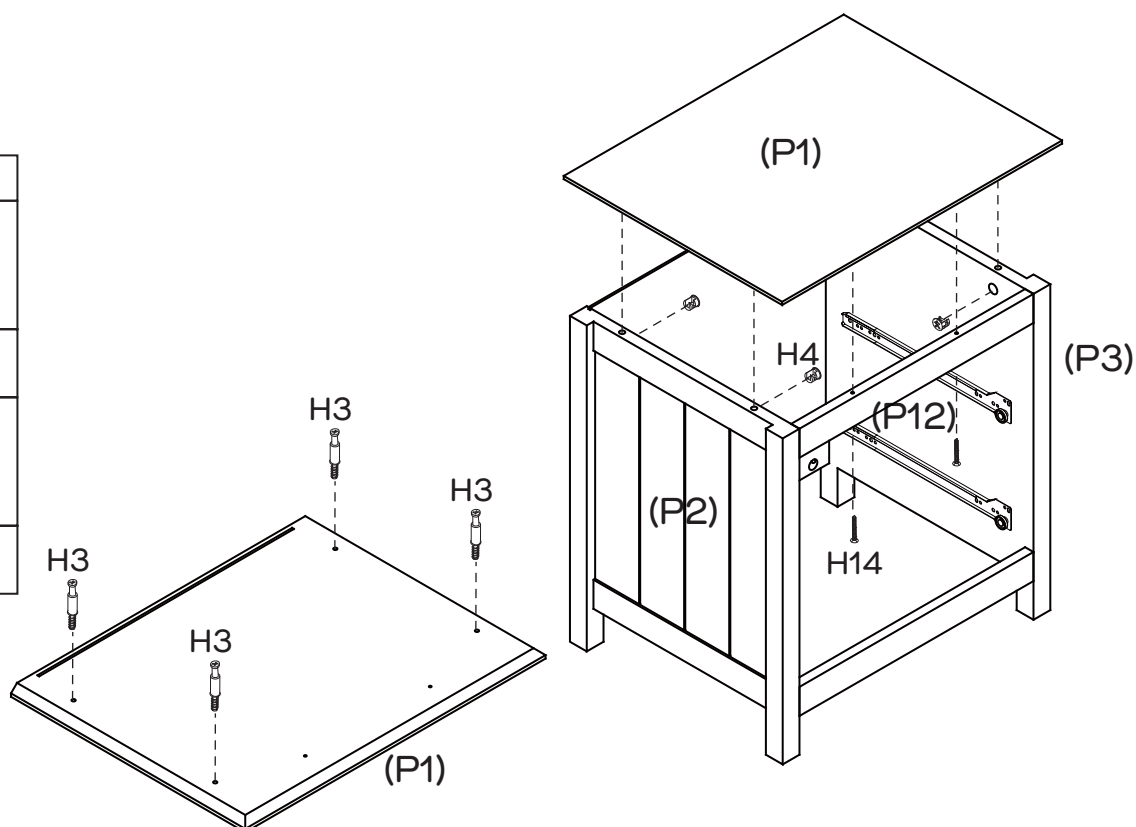
You will need	
4 x Cam Bolts (H3)	4 x Cam Nuts (H4)
2 x Long Screws (H14)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver. Insert 4 x Cam Nuts (H4) into Left & Right Side Panel (P2&P3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Front Rail (P12) to Top Panel (P1) with 2x Long Screws (H14). Attach Top Panel (P1) to Left & Right Side Panel (P2&P3) by tightening all cam nuts with the Phillips Head Screwdriver.



Step 7


You will need	
	
4 x Wedges (H12)	4 x Wedge Screws (H13)
	
Phillips Head Screwdriver	

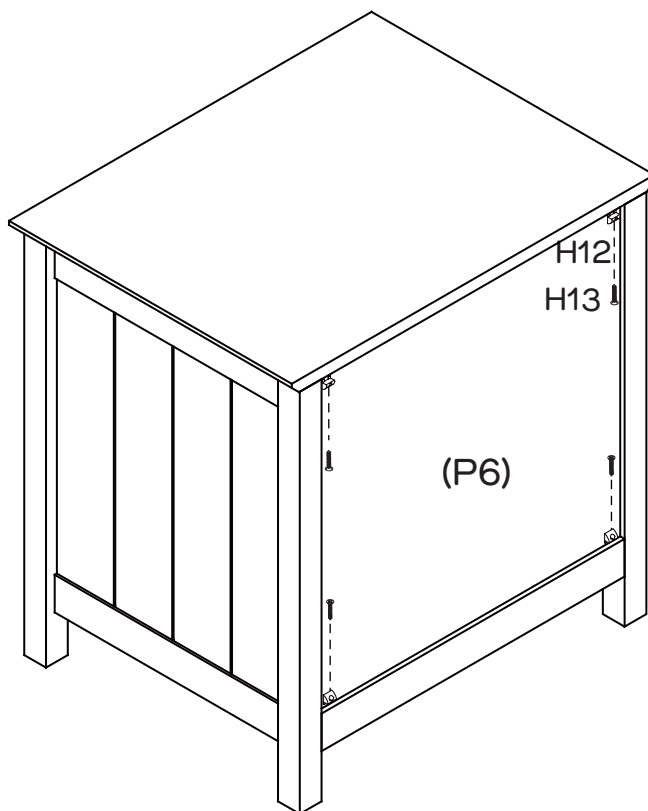

Secure Back Panel (P6) in place with 4 x Wedges (H12) using 4 x Wedge Screws (H13). Tighten with a Phillips Head Screwdriver.



Step 8

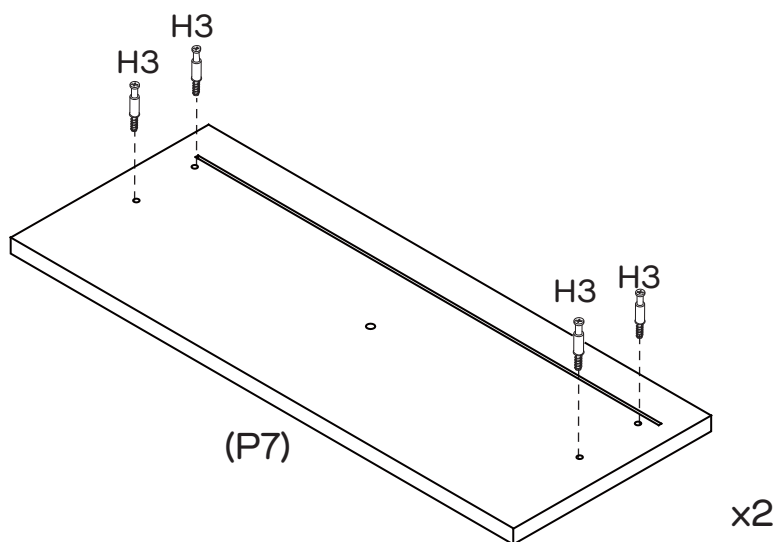
You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 8 x Cam Bolts (H3) to Drawer Fronts (P7x2). Tighten with a Phillips Head Screwdriver.


Step 9

You will need	
	
8 x Cam Nuts (H4)	Phillips Head Screwdriver

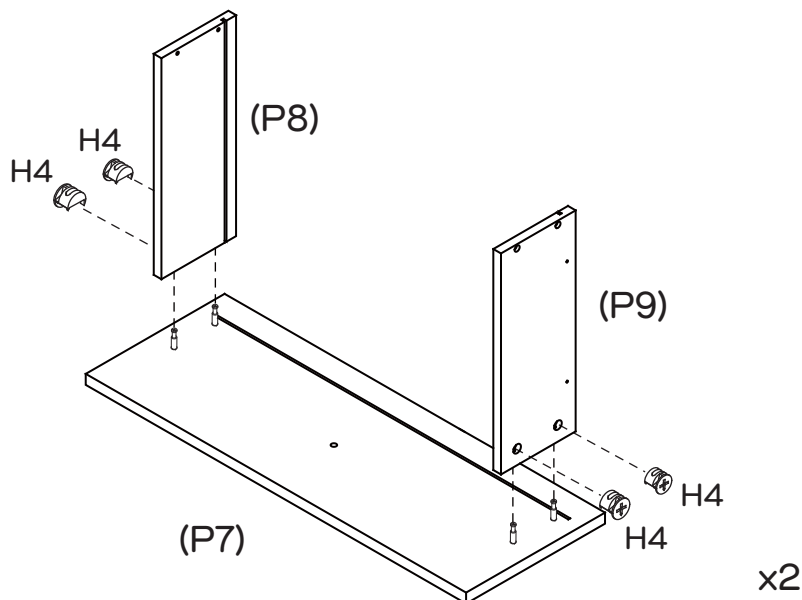



Attach Drawer Sides (P8x2&P9x2) to Drawer Front (P7x2). Insert 8 x Cam Nuts (H4) into the holes of Drawer Sides (P8x2, P9x2). Make sure the opening on cam nuts point towards the incoming cam bolts. Tighten with a Phillips Head Screwdriver.

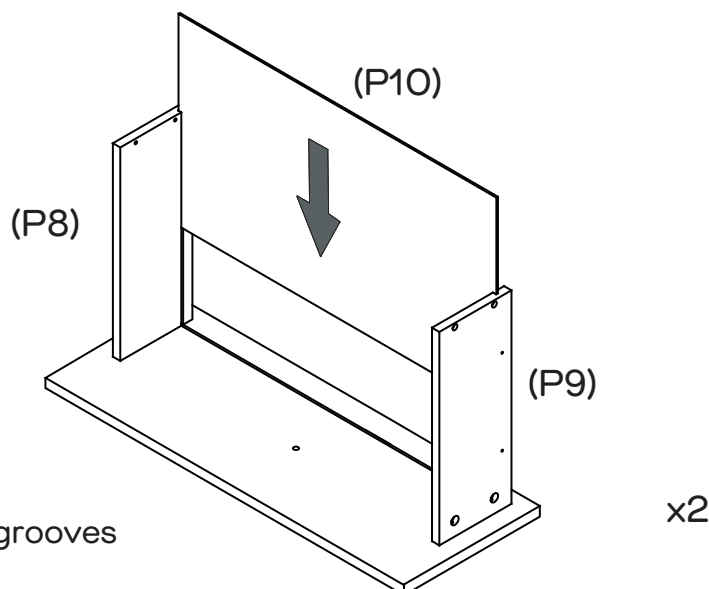
Step 10



Slide the Drawer Base (P10x2) into the grooves between drawer sides as shown.





Step 11

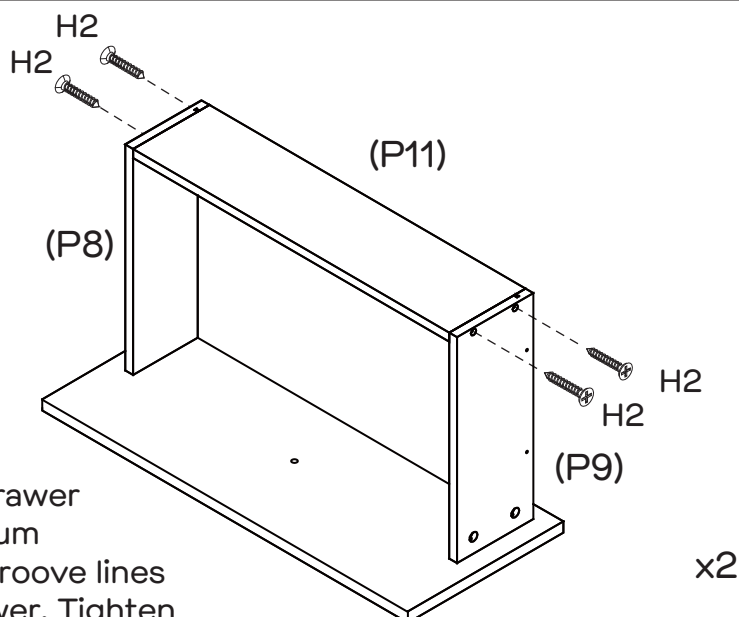
You will need	
	
8 x Medium Screws (H2)	Phillips Head Screwdriver



Attach Drawer Backs (P11x2) to Drawer Sides (P8x2&P9x2) with 8 x Medium Screws (H2), make sure that the groove lines up the whole way around the drawer. Tighten with a Phillips Head Screwdriver.




Step 12

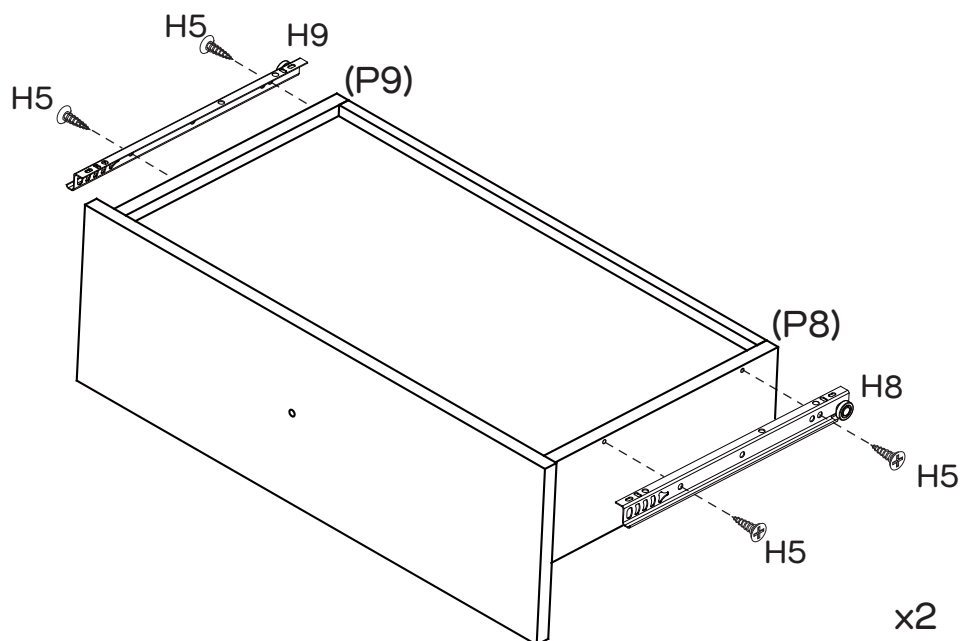
You will need	
	
2 x DL Runners (H8)	2 x DR Runners (H9)
	
8 x Small Screws (H5)	Phillips Head Screwdriver



Attach 2 x DL Runners (H8) to Left Drawer Sides (P8x2) and 2 x DR Runners (H9) to Right Drawer Side (P9x2) with 8 x Small Screws (H5) using a Phillips Head Screwdriver.


Step 13

You will need	
	
3 x Handle Bolts (H11)	3 x Handles (H10)
	
Phillips Head Screwdriver	

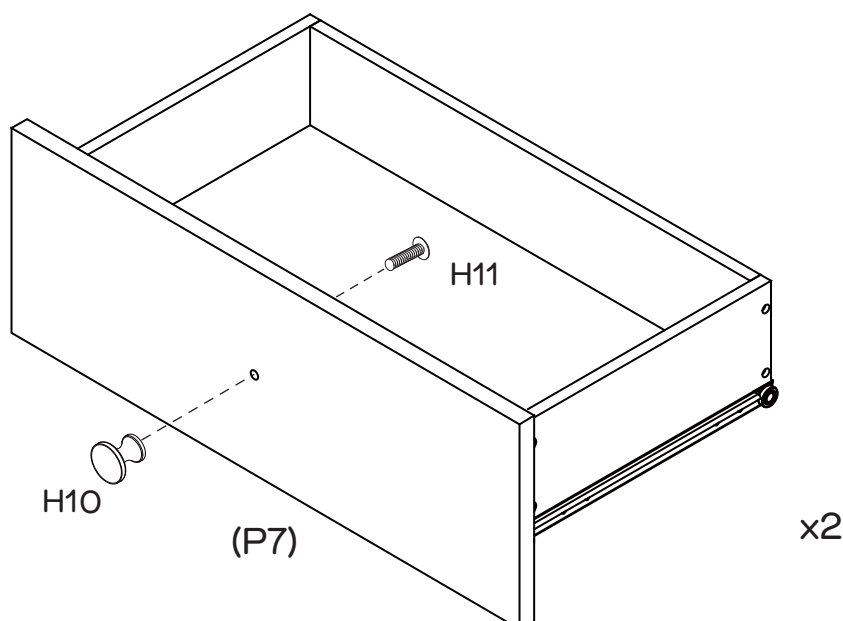


Attach 2 x Handles (H10) to Drawer Fronts (P7x2) with 2 x Handle Bolts (H11) by tightening with the Phillips Head Screwdriver.

Step 14

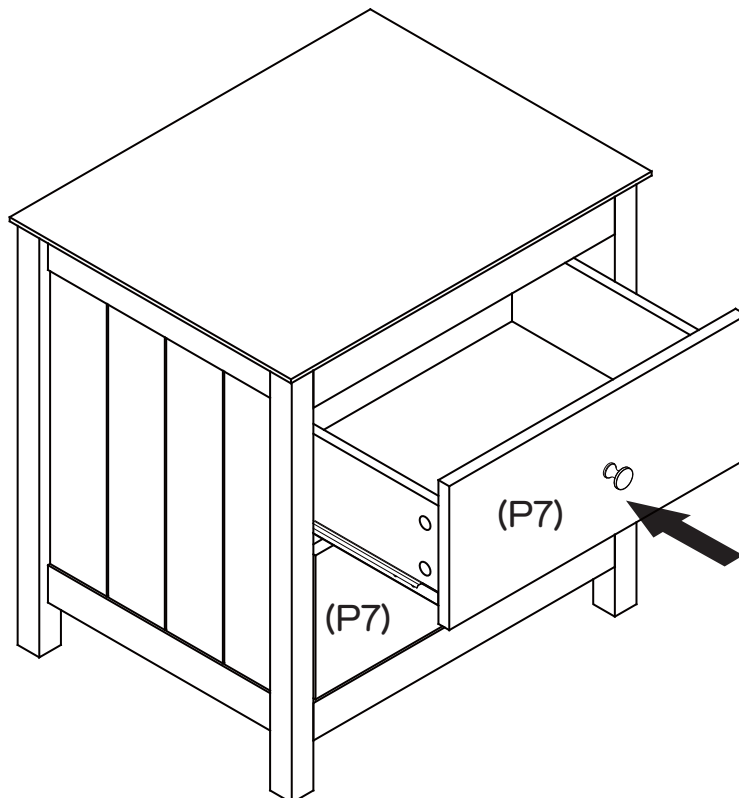

Insert the assembled drawers into the corresponding compartments as shown. Ensure the drawers slide easily along the rails.

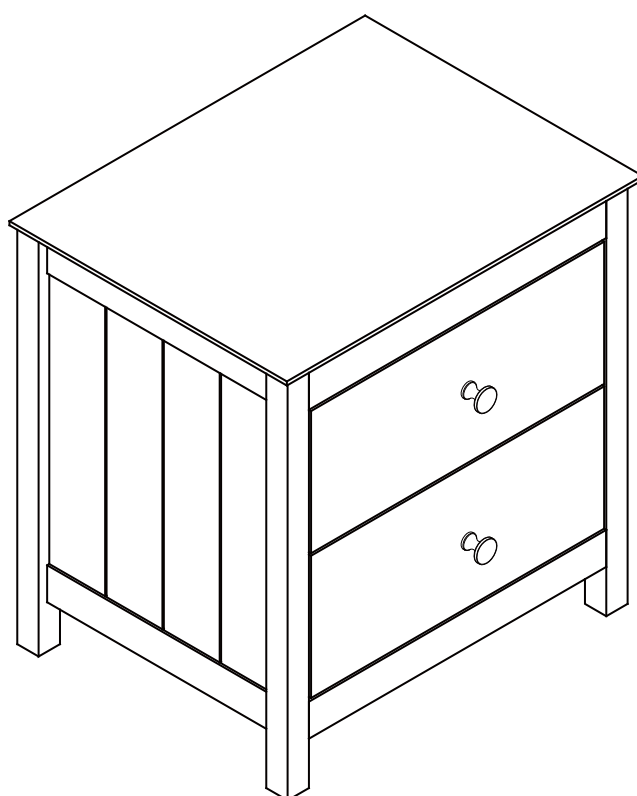


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.



**Fantastic
Furniture**

Version 1.0

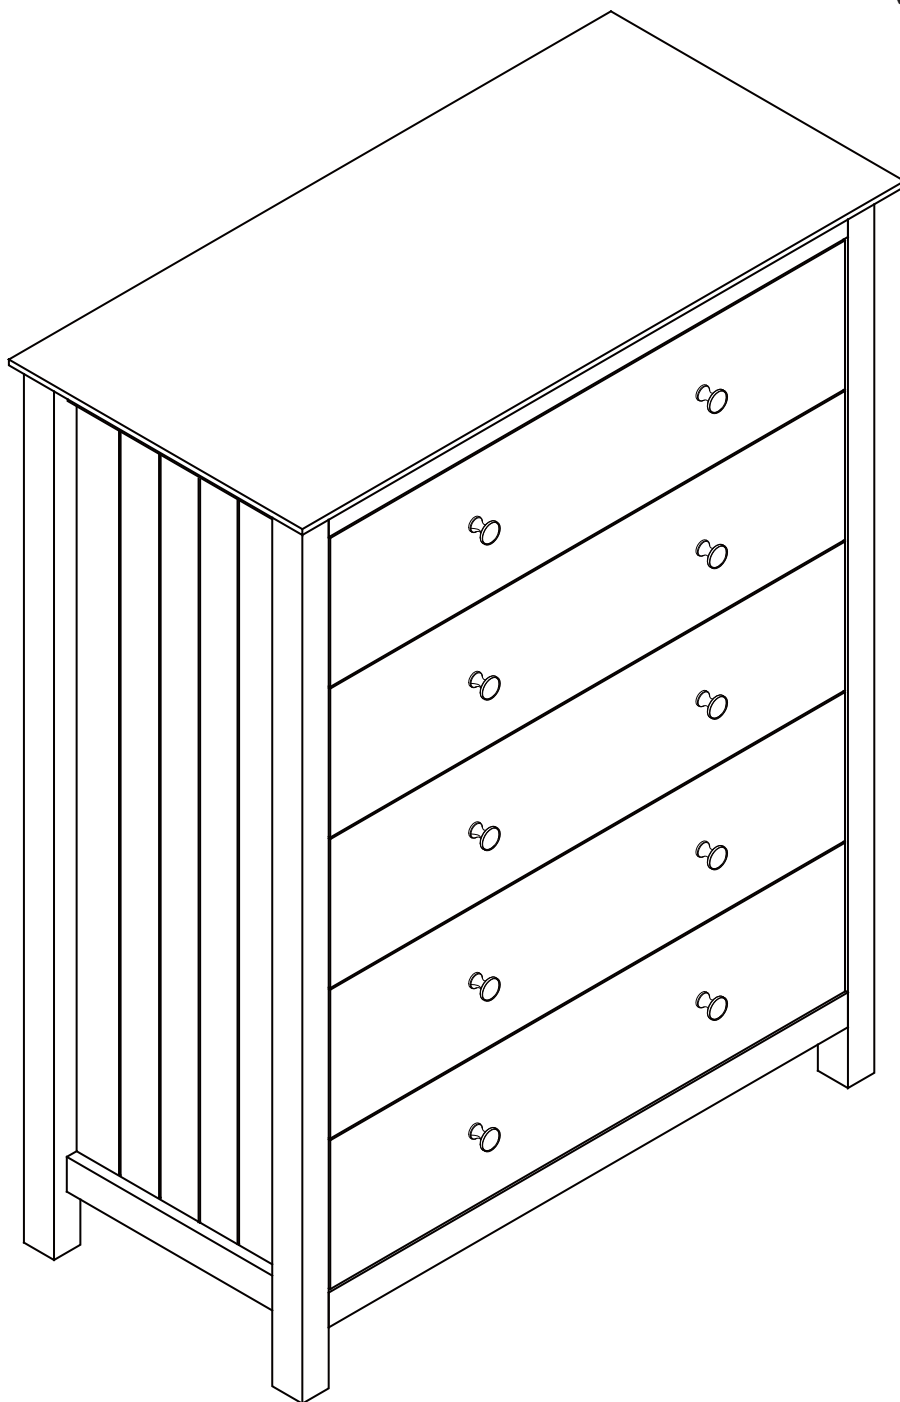

Hamilton

Tallboy 5 Drawer

fantasticfurniture.com.au

Recommended weight capacity : 50kgs on top.



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

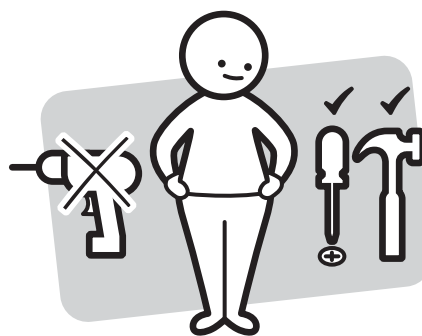

Make sure you have all the required tools. Never use power tools unless instructed.

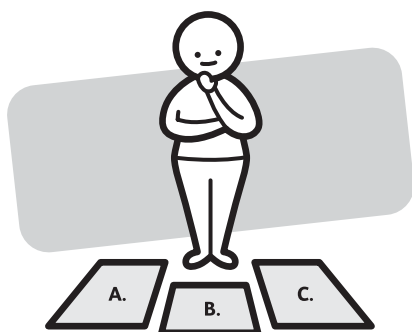

Identify and lay out all of the components before you begin assembly.

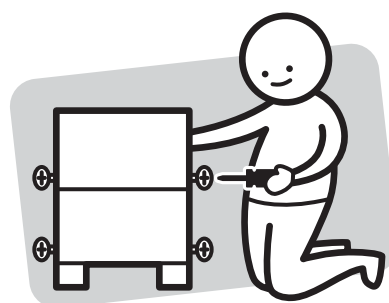

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need:
Phillips head screwdriver;


Parts list

Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
Rail (P4);
Rail (P5);
Rail (P6);
Rail (P7);
4 x Back Panels (P8);
5 x Drawer Fronts (P9);
5 x Left Drawer Sides (P10) ;
5 x Right Drawer Sides (P11);
5 x Drawer Bases (P12);
5 x Drawer Backs (P13);
2 x Connect Sticks (P14);
Rail (P15)

Left Side Panel (P2)

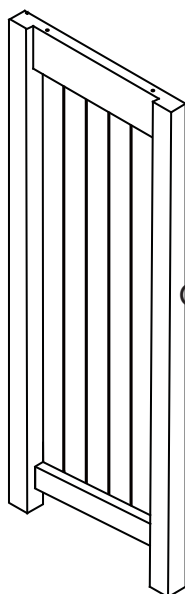

4 x Back Panels (P8)

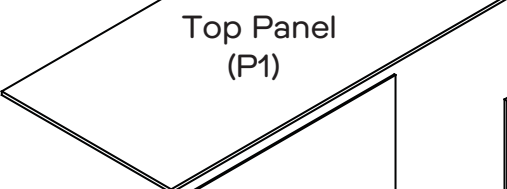

Top Panel (P1)

Right Side Panel (P3)

Rail (P15)

Rail (P6)

2 x Connect Stick (P14)

Rail (P7)

Rail (P5)

Rail (P4)

Drawer Back (P13)

Right Drawer Side (P11)


Drawer Base (P12)

Left Drawer Side (P10)

Drawer Front (P9)

x5


Hardware pack



8 x Dowels (H1)



20 x Long Screws (H2)




40 x Cam Bolts (H3)




40 x Cam Nuts (H4)




50 x Small Screws (H5)




5 x CL Runner Tracks (H6)



5 x CR Runner Tracks (H7)



5 x DL Runners (H8)




5 x DR Runners (H9)




10 x Handles (H10)



10 x Bolts (H11)



1 x Safety Strap (H12)



1 x Screw (H13)

2 x Washers (H14)



8 x Wedges (H15)







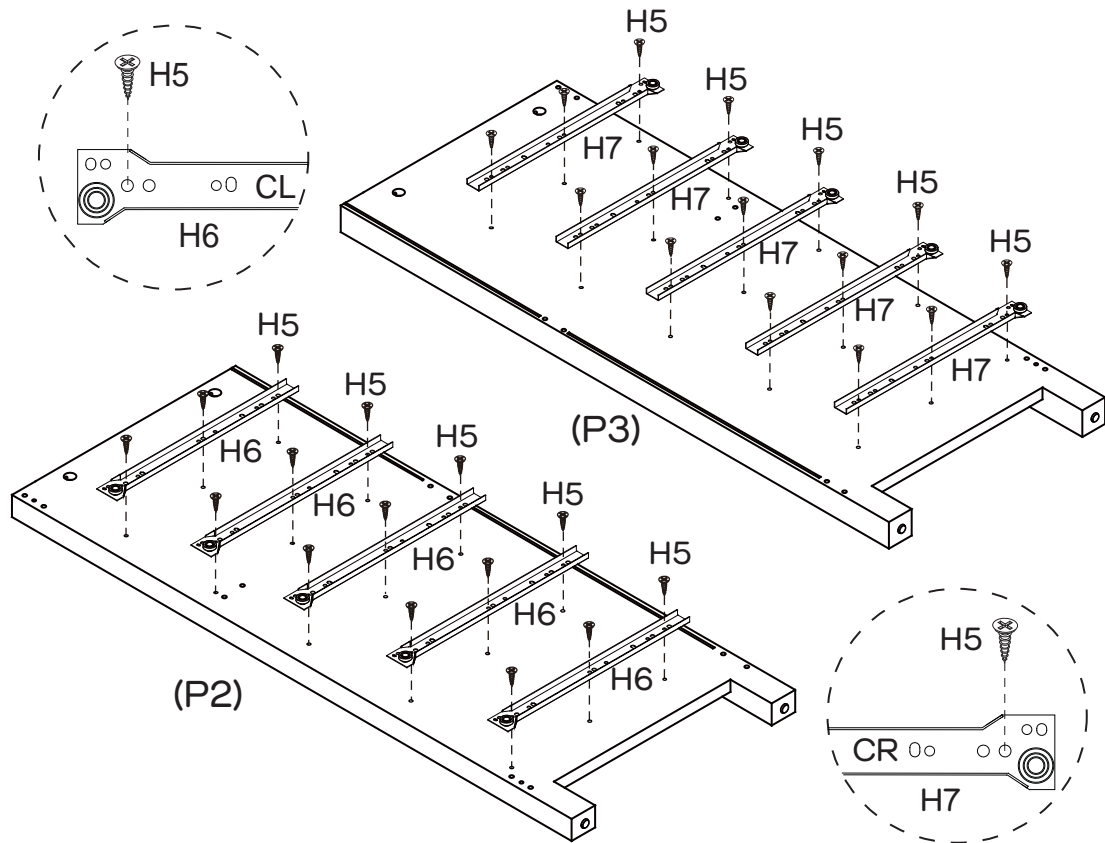
8 x Screws (H16)



3 x Long Screws (H17)




Step 1


You will need	
	
30 x Small Screws (H5)	5 x CL Runner Tracks (H6)
	
5 x CR Runner Tracks (H7)	Phillips Head Screwdriver



Attach 5x CL Runner Tracks (H6) and 5 x CR Runner Tracks (H7) to Left & Right Side Panels (P2&P3) with 30 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.



Step 2

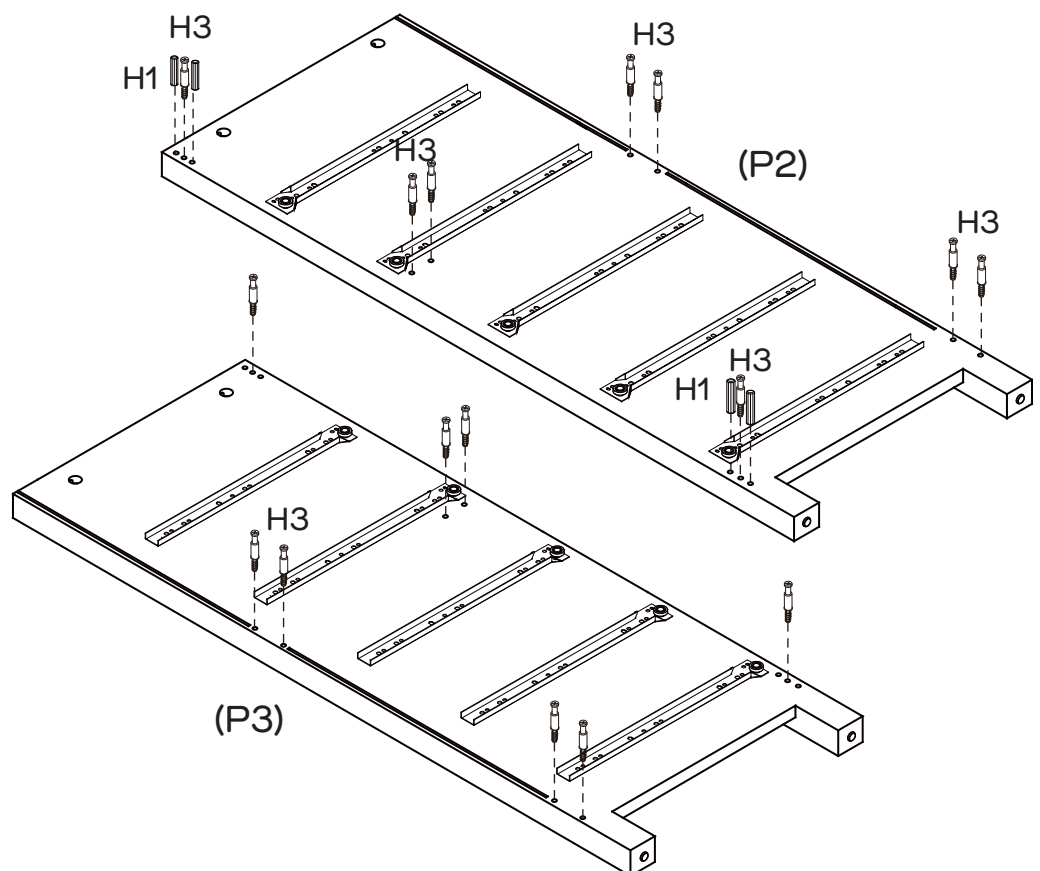You will need	
	
4 x Dowels (H1)	16 x Cam Bolts (H3)
	
Phillips Head Screwdriver	




Insert 4x Dowels (H1) into Left (P2) as shown. Attach 16 x Cam Bolts (H3) to Left & Right Side Panels (P2&P3) by tightening with the Phillips Head Screwdriver.


Step 3

You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....



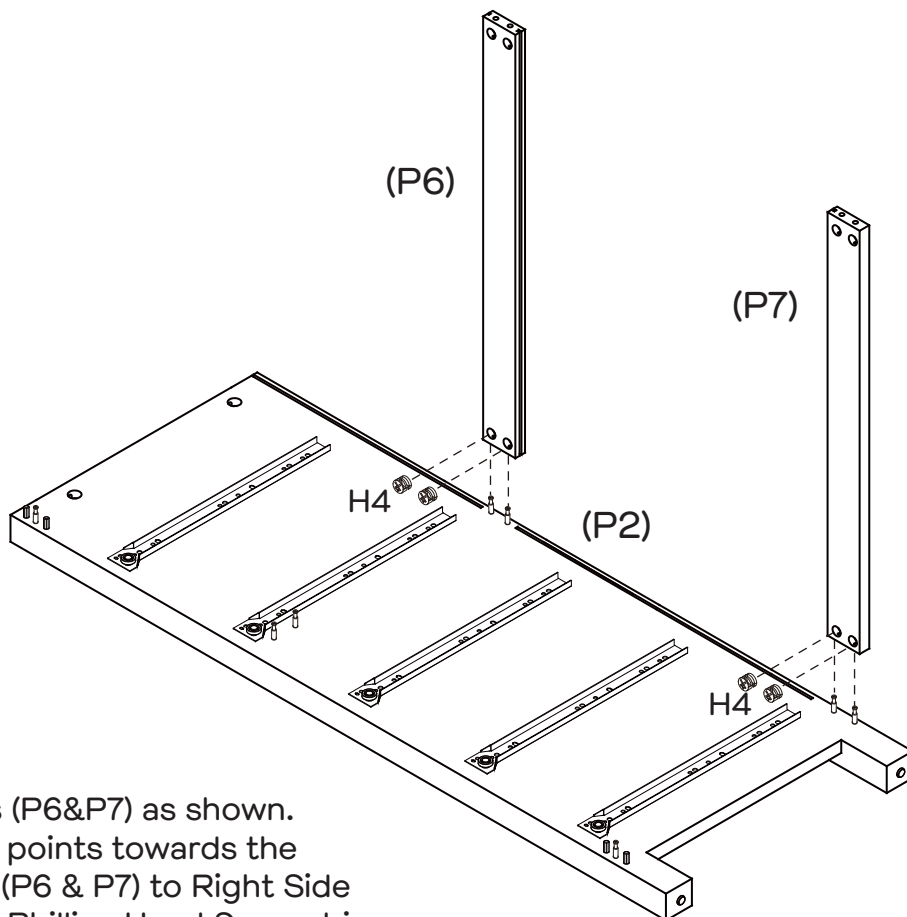

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Insert 4x Cam Nuts (H4) into Rails (P6&P7) as shown. Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Rails (P6 & P7) to Right Side Panels (P3) by tightening with the Phillips Head Screwdriver.

Step 4




You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

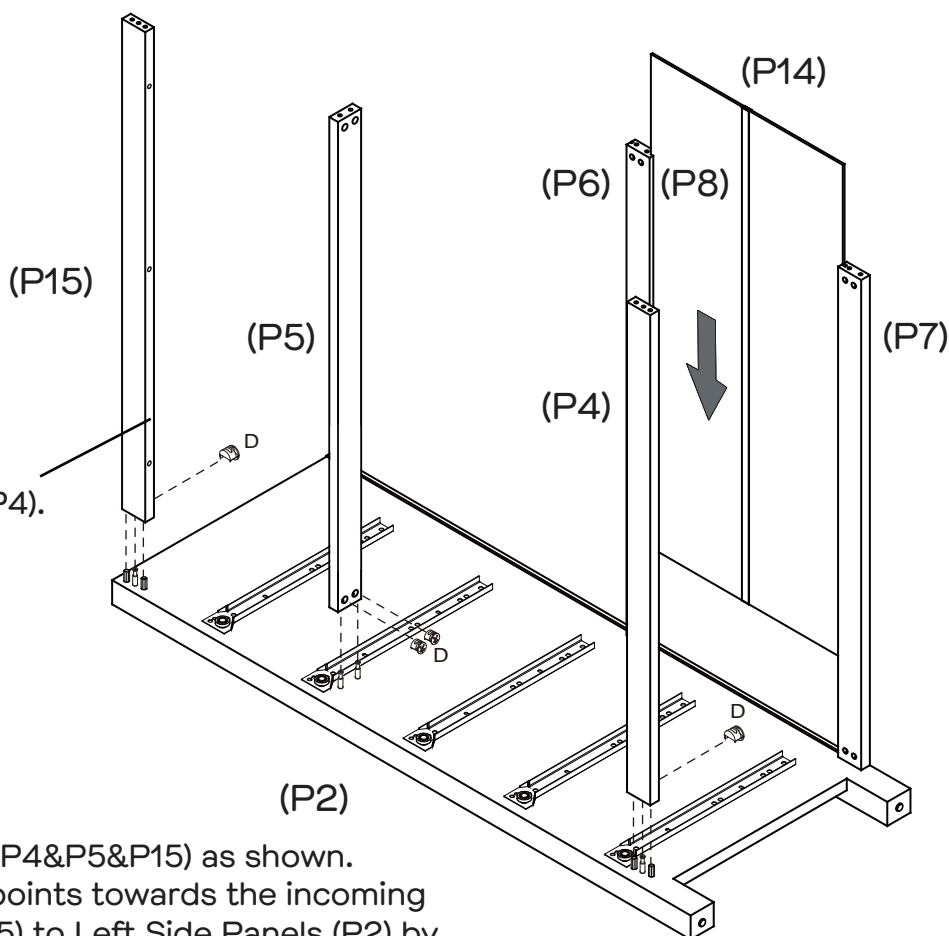
Make sure the side with bigger holes is facing to Rail (P4).



Insert 4x Cam Nuts (H4) into Rails (P4&P5&P15) as shown. Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Rails (P4&P5&P15) to Left Side Panels (P2) by tightening with the Phillips Head Screwdriver. Join Back Panels (P8x2) with Connect Stick (P14). Slide Back Panels (P8x2) into the grooves of Rails (P6 & P7).



Step 5


You will need	
	
4 x Dowels (H1)	8 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

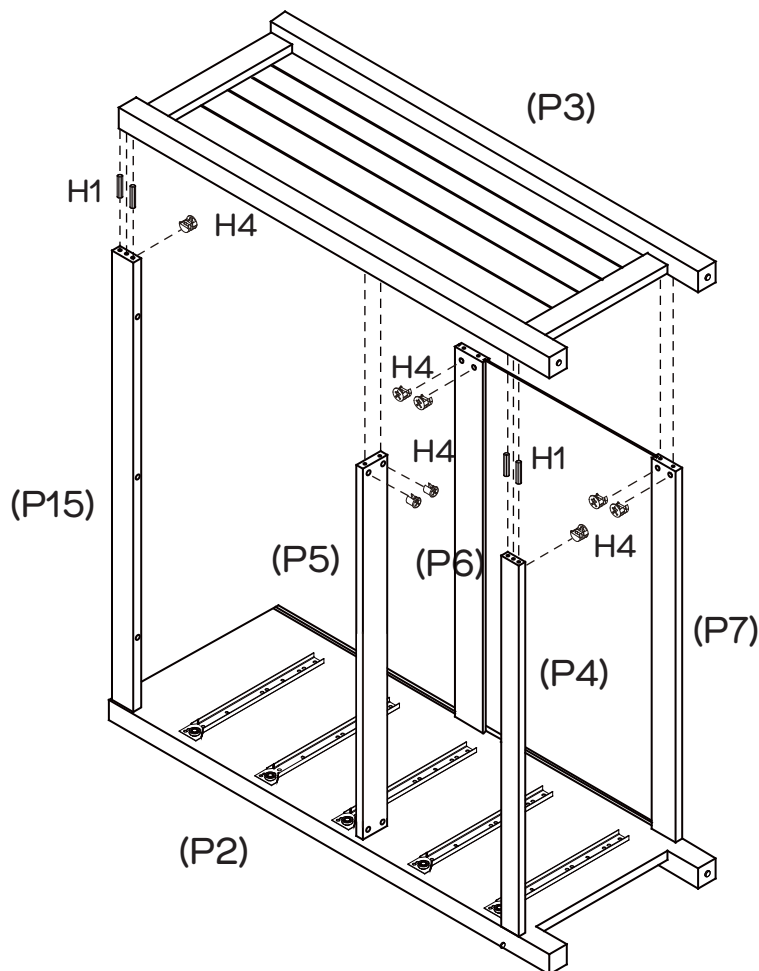

Insert 8 x Cam Nuts (H4) into the holes of Rails (P4&P5&P6&P7&P15). Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Rails (P4&P5&P6&P7&P15) to Right Side Panels (P3) by tightening with the Phillips Head Screwdriver.



Step 6

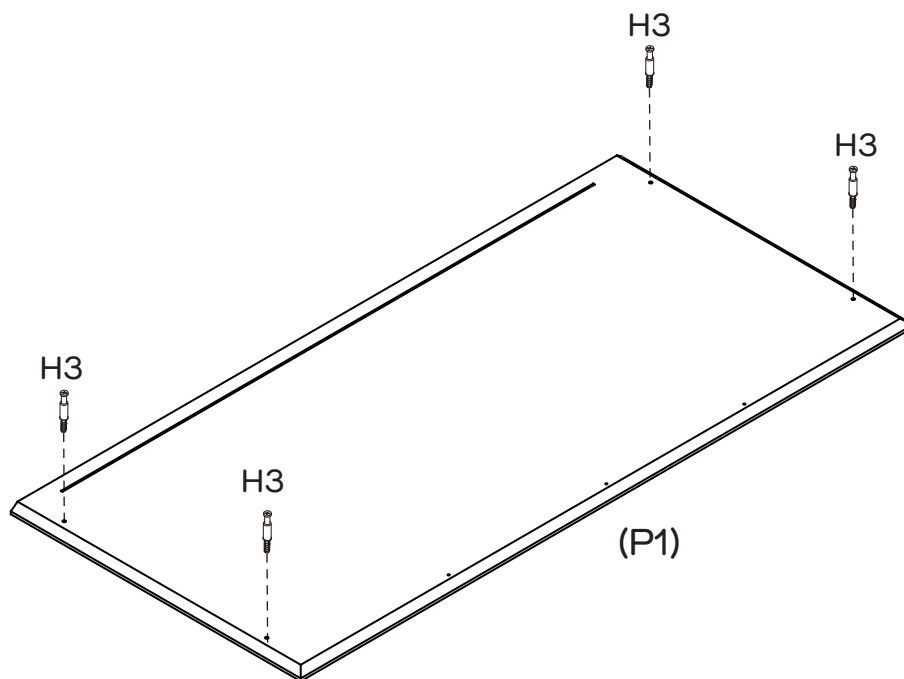
You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver.



Step 7

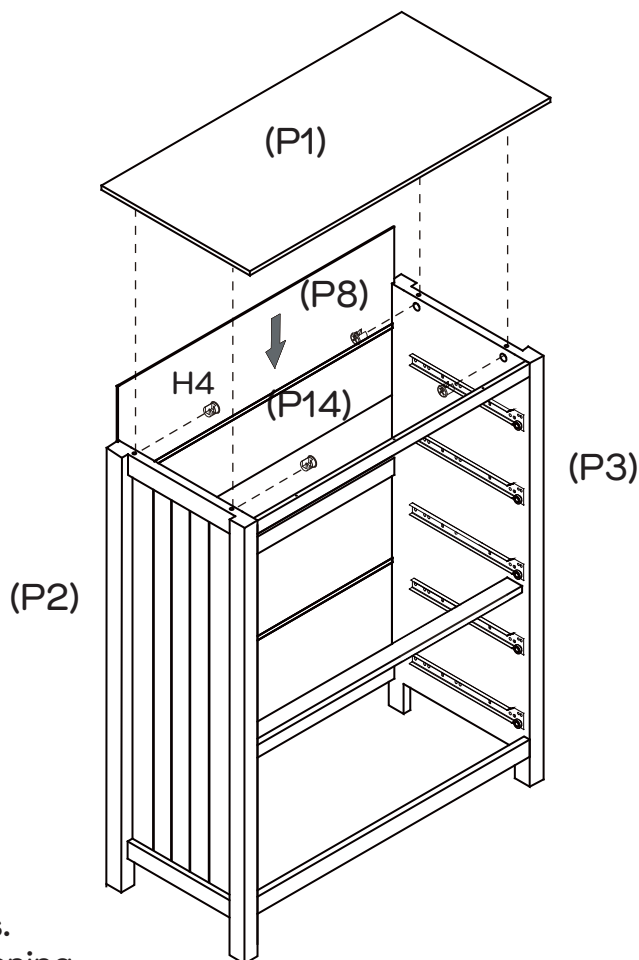
You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver



Gently stand the unit upright. Join Back Panels (P8x2) with Connect Stick (P14). Slide Back Panels (P8x2) into the grooves of Left & Right Side Panels (P2&P3). Insert 6 x Cam Nuts (H4) into Left & Right Side Panels (P2&P3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to unit by tightening cam nuts with the Phillips Head Screwdriver.



Step 8


You will need	
	
3 x Long Screws (H17)	Phillips Head Screwdriver

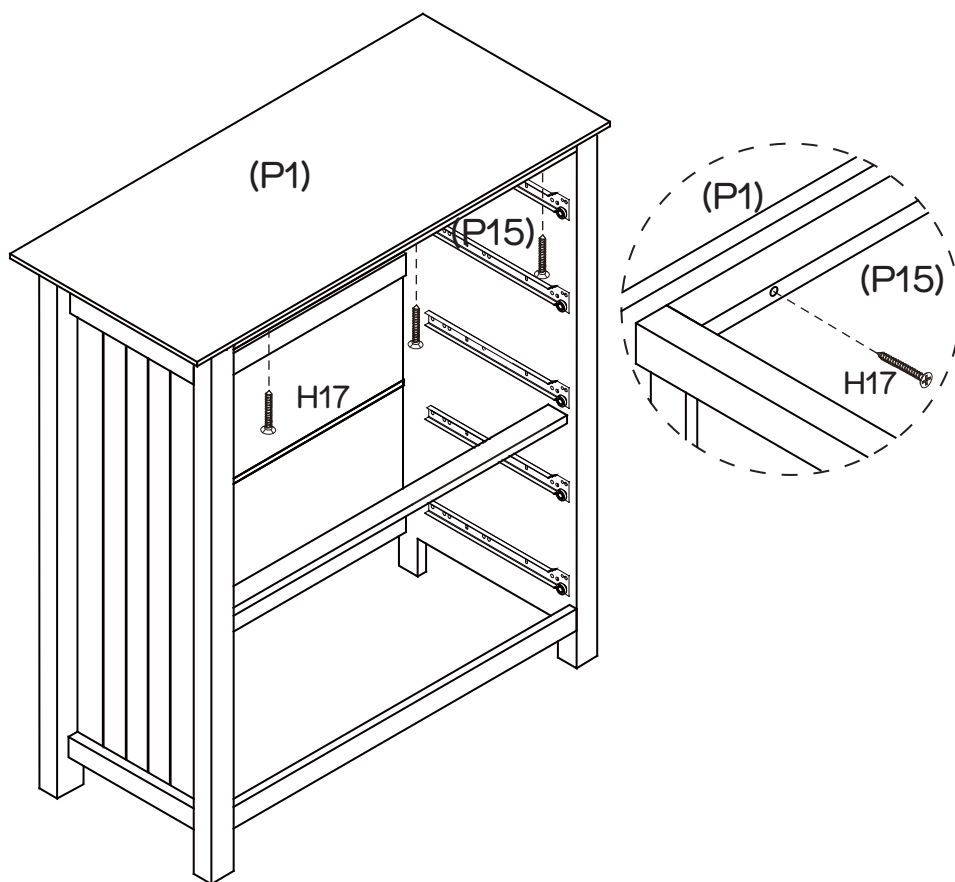

Secure Top Panel (P1) to Rail (P15) with 3 x Long Screws (H17) by tightening with the Phillips Head Screwdriver.





Step 9

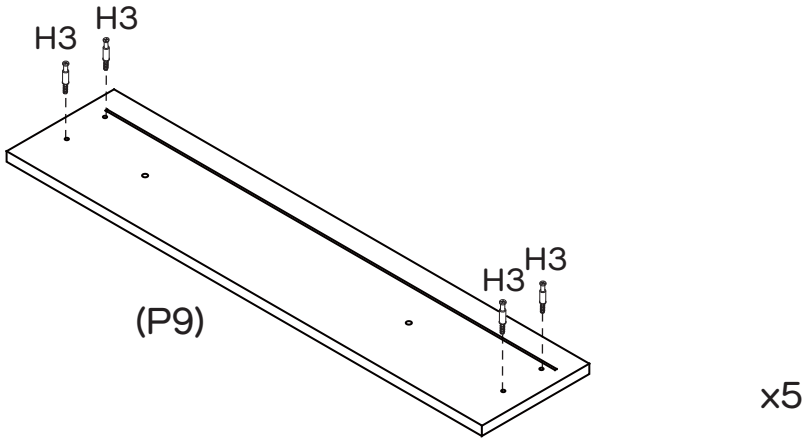
You will need	
	
20 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 20 x Cam Bolts (H3) to Drawer Fronts (P9x5) by tightening with the Phillips Head Screwdriver.



Step 10

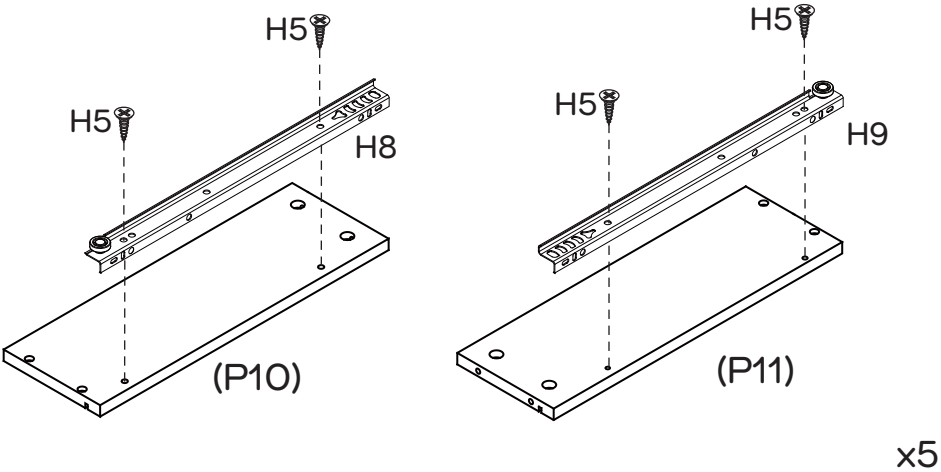
You will need	
	
5 x DL Runners (H8)	5 x DR Runners (H9)
	
20 x Small Screws (H5)	Phillips Head Screwdriver



Attach 5 x DL Runners (H8) to the bottom of Left Drawer Sides (P10x5) and 5 x DR Runners (H9) to the bottom of Right Drawer Sides (P11x5) with 20 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


Step 11

You will need	
	
20 x Cam Nuts (H4)	Phillips Head Screwdriver

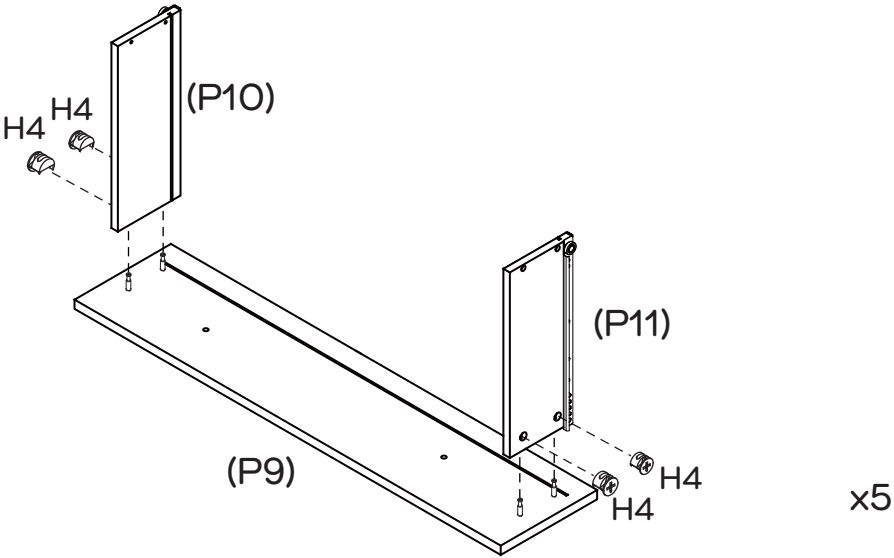



Insert 20 x Cam Nuts (H4) into Left & Right Drawer Sides (P10x5&P11x5) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Left & Right Drawer Sides (P10x5&P11x5) to Drawer Fronts (P9x5) by tightening the cam nuts with the Phillips Head Screwdriver.

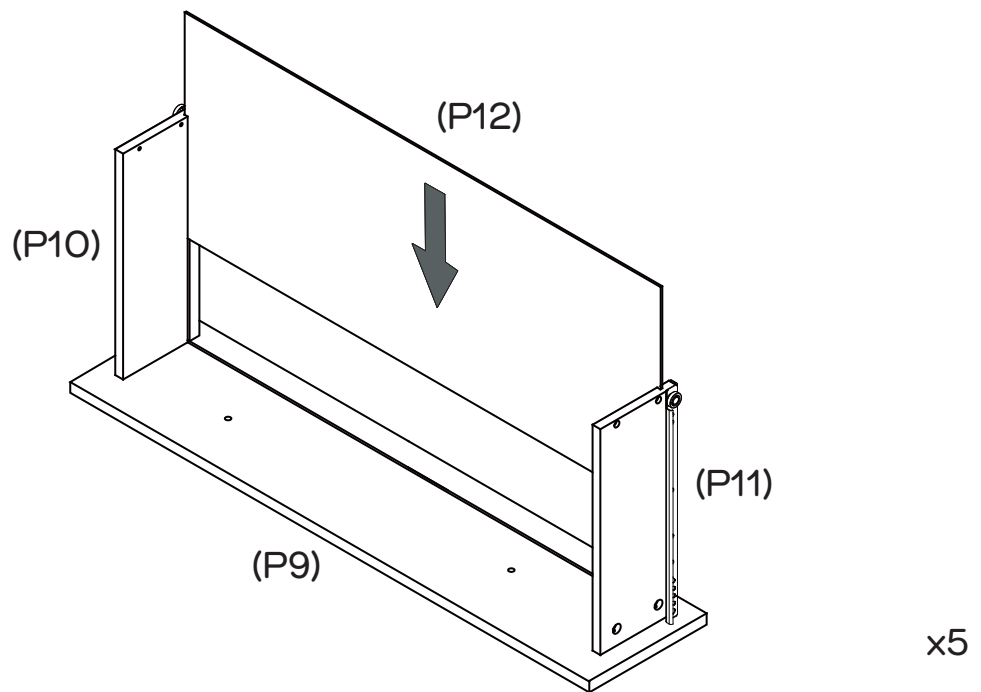
Step 12



Slide Drawer Bases (P12x5) into the grooves of Left & Right Drawer Sides (P10x5&P11x5).




Step 13

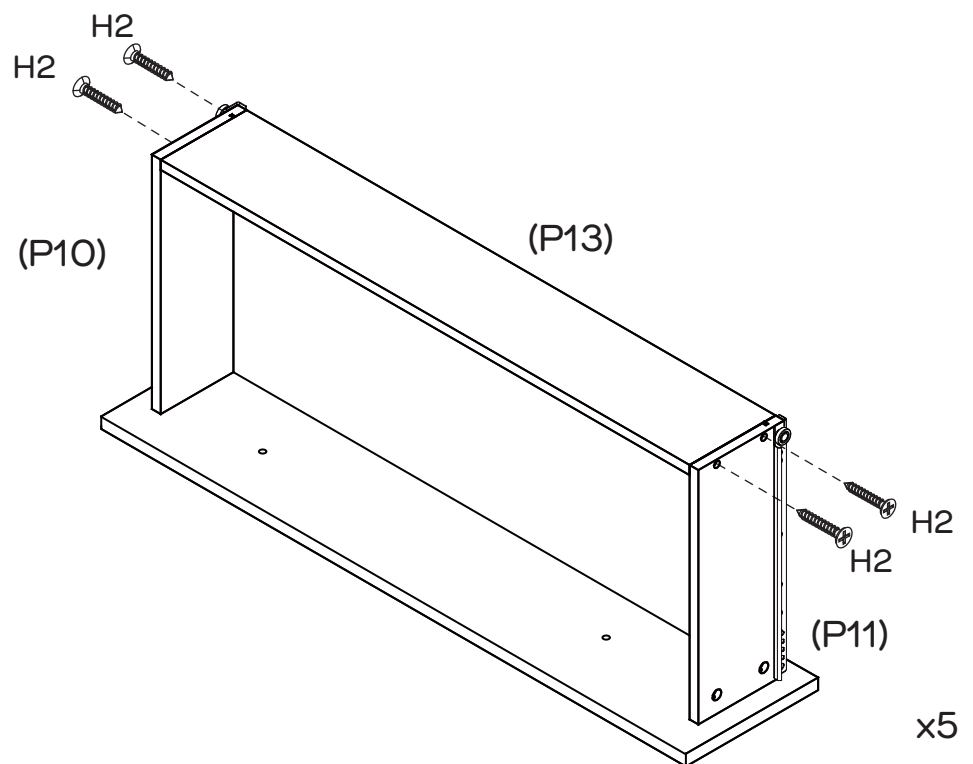
You will need	
	
20 x Long Screws (H2)	Phillips Head Screwdriver



Attach Drawer Backs (P13x5) to Left & Right Drawer Sides (P10x5&P11x5) with 20 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Ensure the Drawer Base lines up with the grooves the whole way around the drawer before securing.


Step 14

You will need	
	
10 x Handle Bolts (H11)	10 x Handles (H10)
	
Phillips Head Screwdriver	

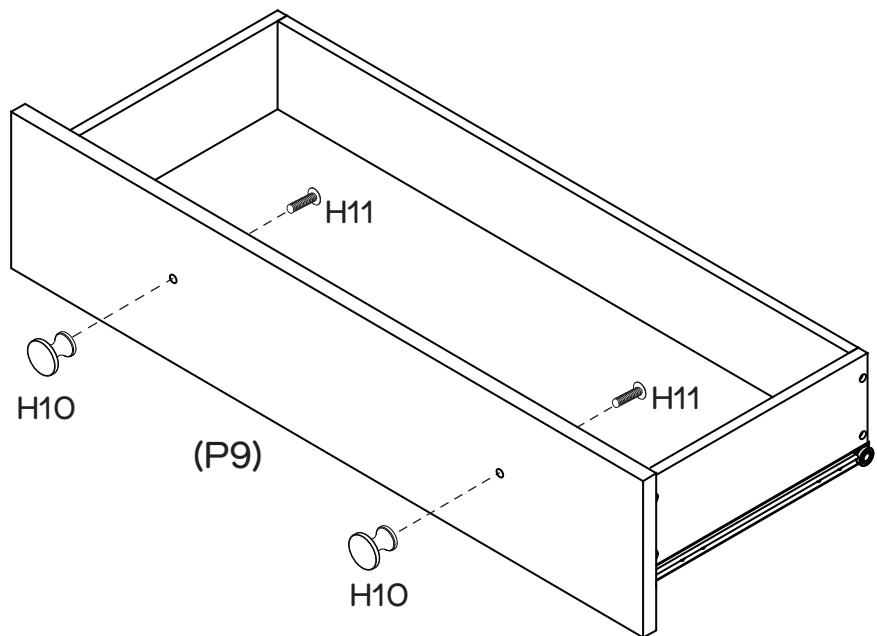







Attach 10 x Handles (H10) to Drawer Fronts (P9x5) with 10 x Handle Bolts (H11) by tightening with the Phillips Head Screwdriver.

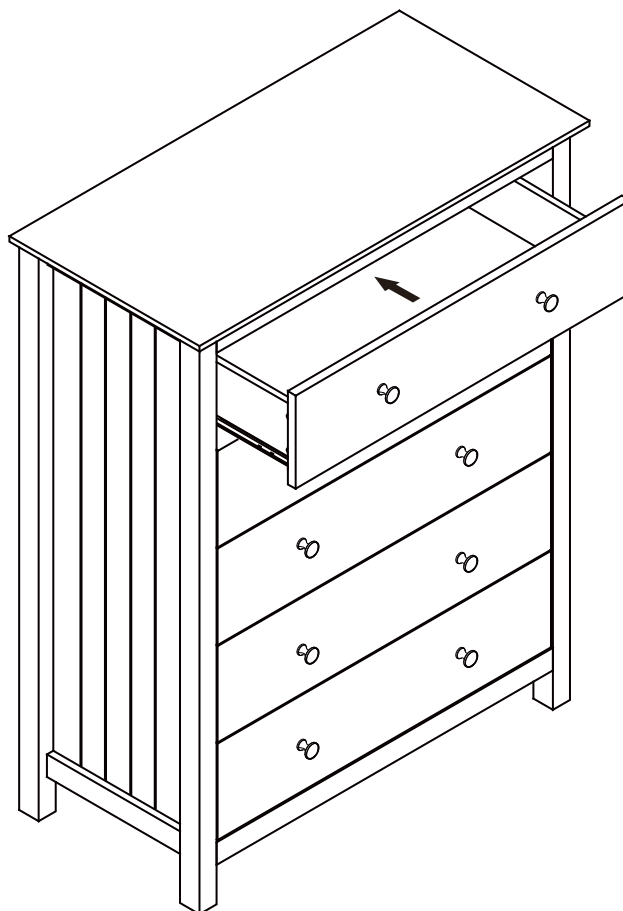
Step 15



Carefully insert the drawers into the tallboy by gently guiding the runners into the tracks.



Step 16

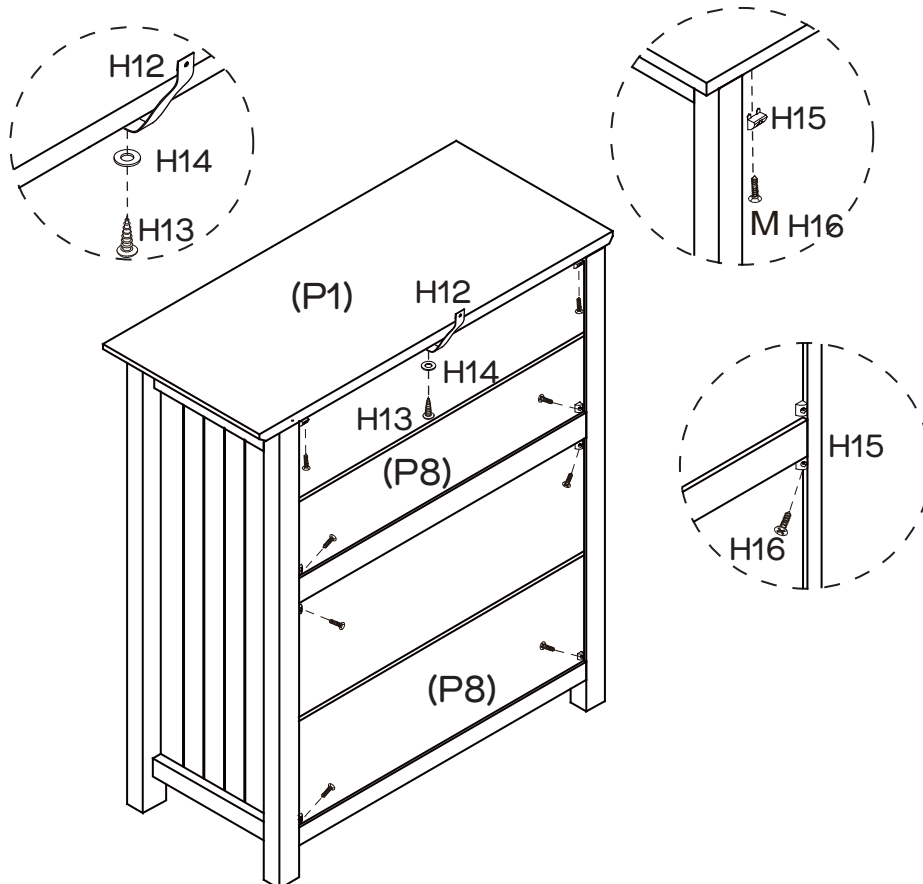You will need	
	
8 x Wedges (H15)	8 x Wedge Screws (H16)
	
1 x Safety Strap (H12)	1 x Safety Strap Screw (H13)
	
1 x Washer (H14)	Phillips Head Screwdriver





Secure Back Panels (P8 x 4) in place with 8 x Wedges (H15) using 8 x Wedge Screws (H16) by tightening with the Phillips Head Screwdriver. Use 1 x Safety Screw (H13) and 1 x Washer (H14) to connect 1 x Safety Strap (H12) on Top Panel (P1).

Step 17

You will need	
	
1 x Washer (H14)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Move the dresser to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

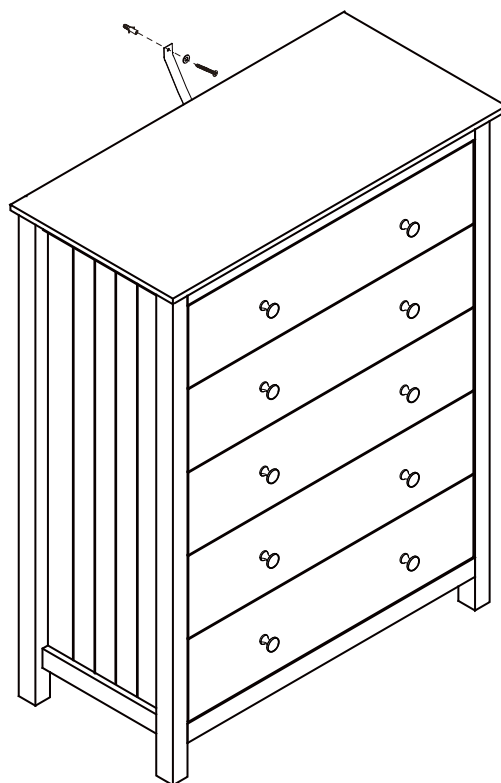

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.