




Version 1.0

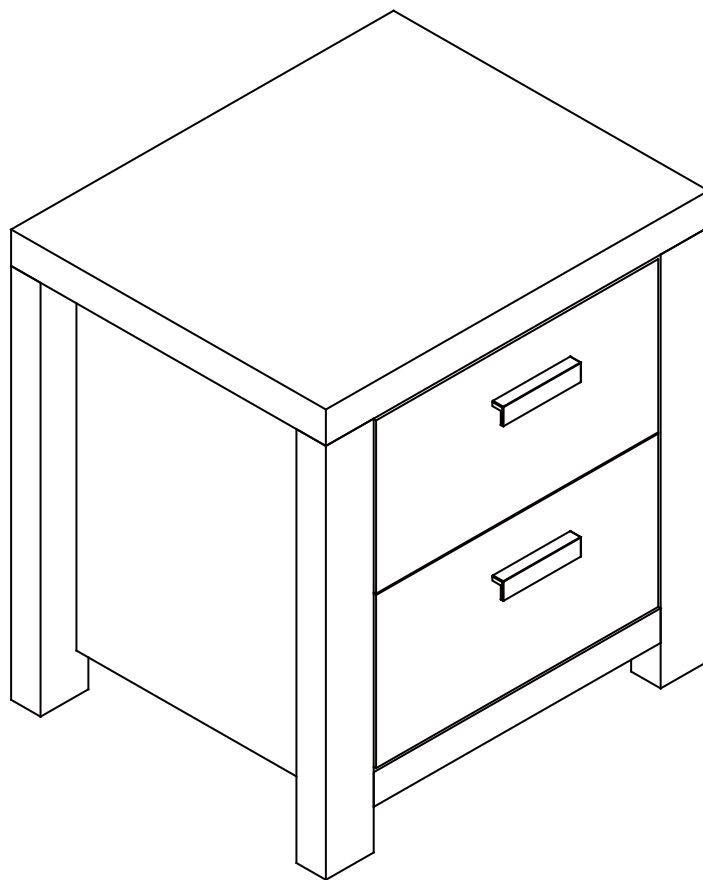

# HAVANA

Bedside 2 Drawer

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)


**Enjoy**  
Your purchase from  
Australia's Best Value Furniture Store




# Assembly checklist




Read through the instructions carefully before you begin.

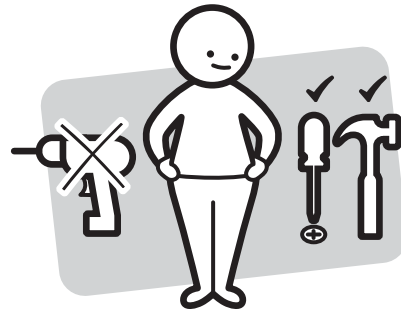

Make sure you have all the required tools.  
Never use power tools unless instructed.

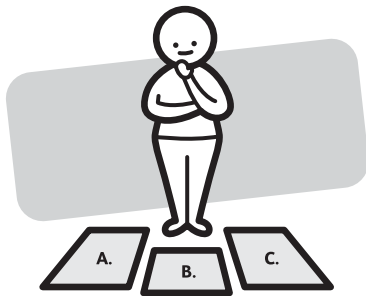

Identify and lay out all of the components before you begin assembly.

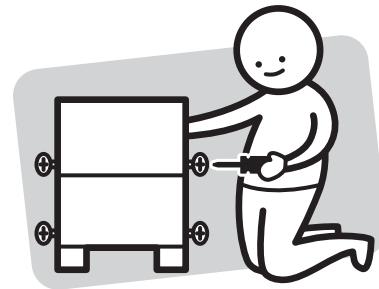

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

# What you need

to assemble the product



DO NOT USE





## Additional Tools Required

Flat head screwdriver;  
Phillips head screwdriver;  
Hammer

## Parts list

**Box 1:** Top Panel (P1);  
Left Side Panel (P2);  
Right Side Panel (P3);  
Rail (P4); Rail (P5);  
Back Panel (P6);  
LF Leg (P7); RF Leg (P8);  
LR Leg (P9); RR Leg (P10);  
2 x Drawer Front (P11);  
2 x Left Drawer Side (P12);  
2 x Right Drawer Side (P13);  
2 x Drawer Base (P14);  
2 x Drawer Back (P15);  
LF: Left Front  
LR: Left Rear  
RF: Right Front  
RR: Right Rear


## Hardware pack

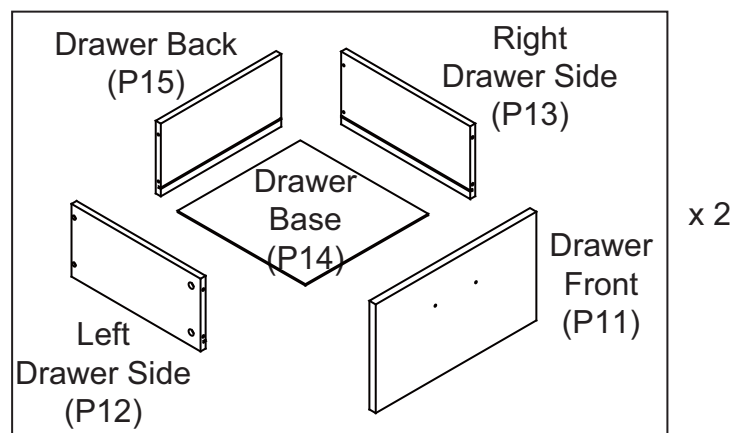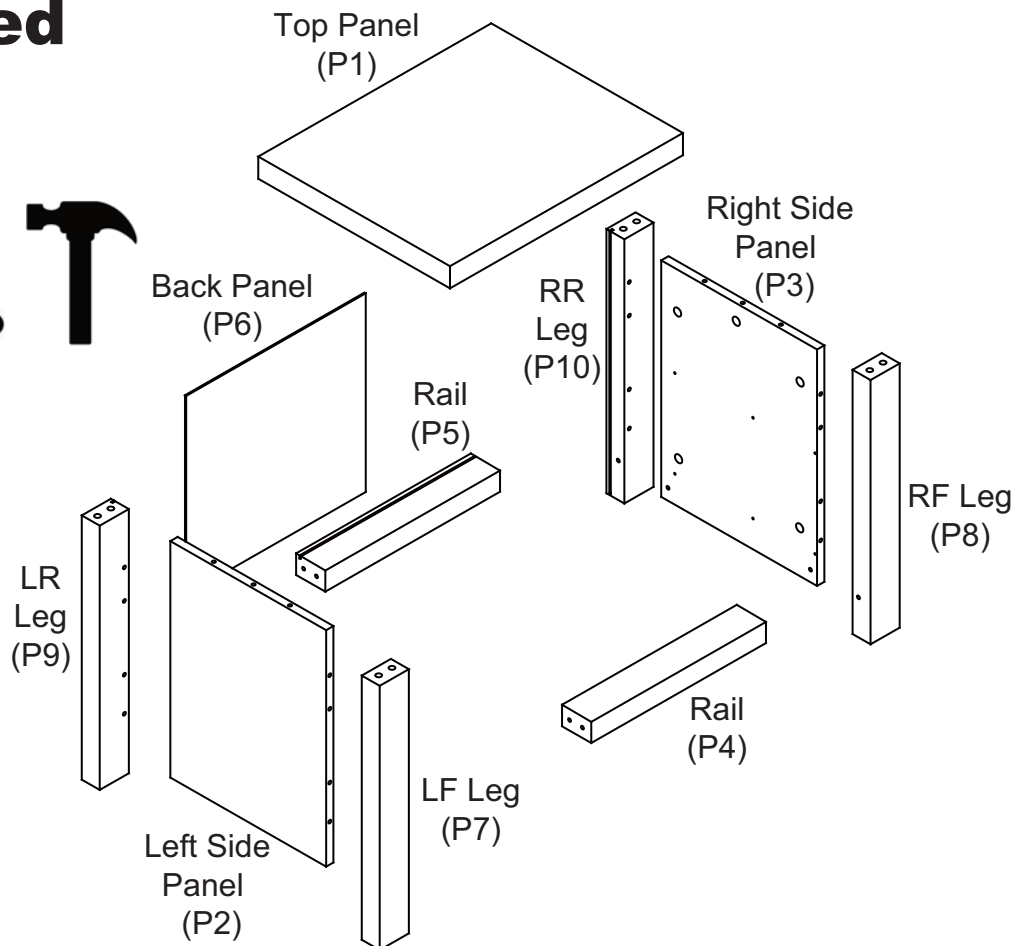

20 x Dowels  
(H1)



4 x Plastic  
Glides  
(H2)



18 x Cam Bolts  
(H3)



18 x Cam Nuts  
(H4)



20 x Small  
Screws  
(H5)




2 x CL Runner  
Tracks  
(H6)




2 x CR Runner  
Tracks  
(H7)



2 x DL Runners  
(H8)



2 x DR Runners  
(H9)




8 x Small  
Cam Bolts  
(H10)



8 x Small  
Cam Nuts  
(H11)



8 x Long  
Screws  
(H12)



2 x Handles  
(H13)



4 x Round  
Head Bolts  
(H14)






4 x Wedges  
(H15)



4 x Screws  
(H16)




# Step 1

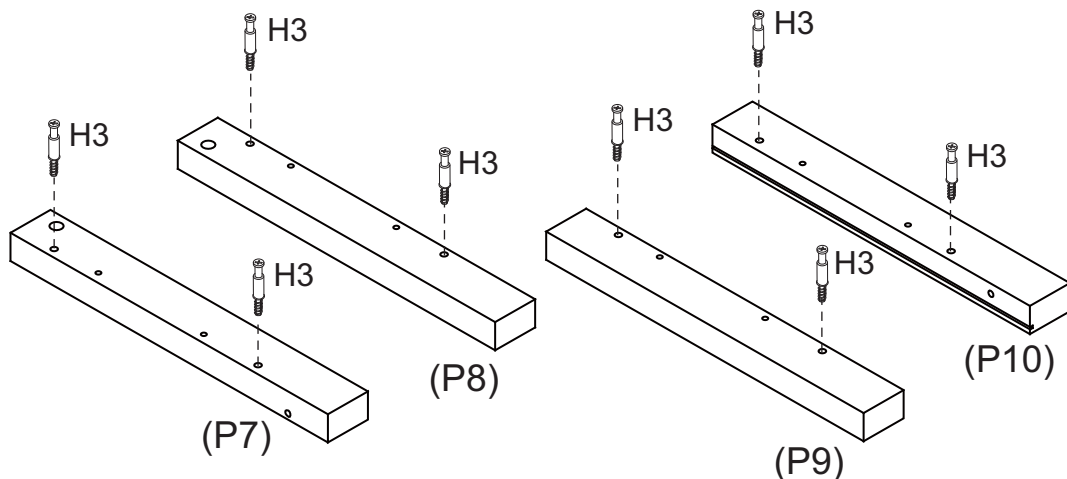
You will need	
	
8 x Cam Bolts (H3)	Phillips head screwdriver




Attach 8 x Cam Bolts (H3) into Legs (P7, P8, P9, P10).

# Step 2

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Flat head screwdriver	

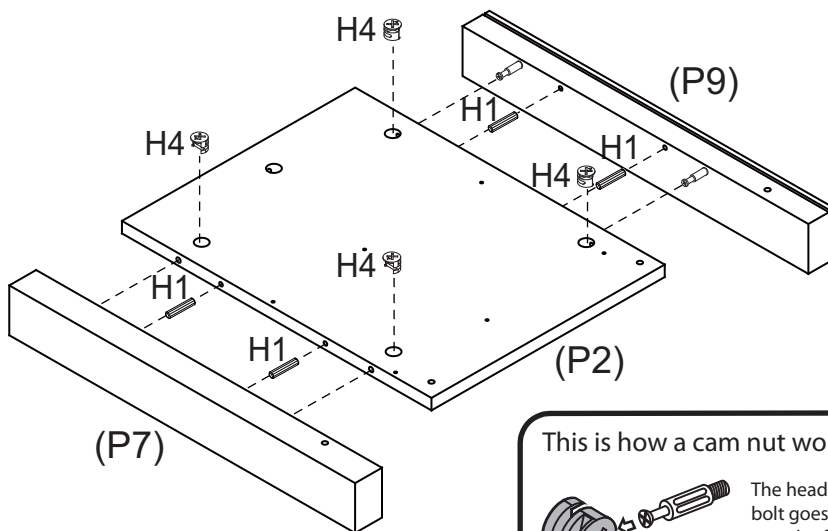




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x Dowels (H1) into the holes of Left Side Panel (P2).  
Insert 4 x Cam Nuts (H4) into the holes of Left Side Panel (P2).  
Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
Attach Legs (P7, P9) to Left Side Panel (P2), then tighten the cam nuts.




# Step 3

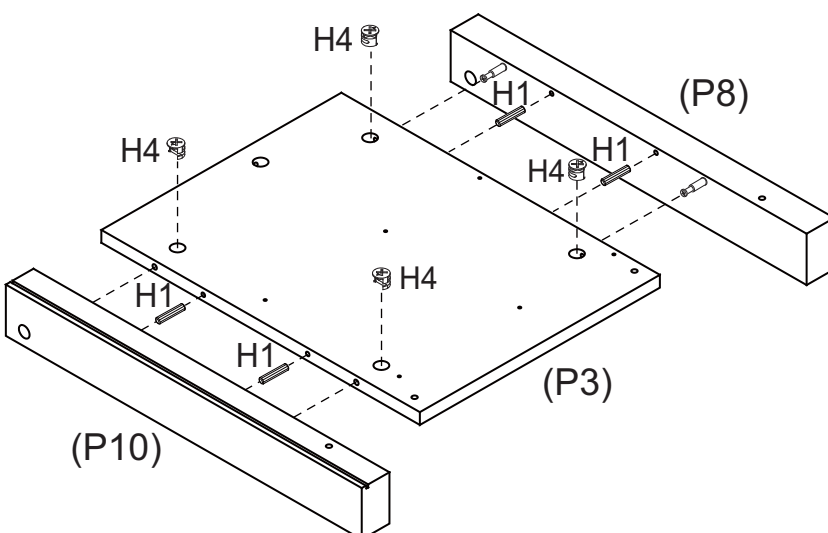
You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Flat head screwdriver	



Insert 4 x Dowels (H1) into the holes of Right Side Panel (P3).  
Insert 4 x Cam Nuts (H4) into the holes of Right Side Panel (P3).  
Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
Attach Legs (P8, P10) to Right Side Panel (P3), then tighten the cam nuts.




## Step 4

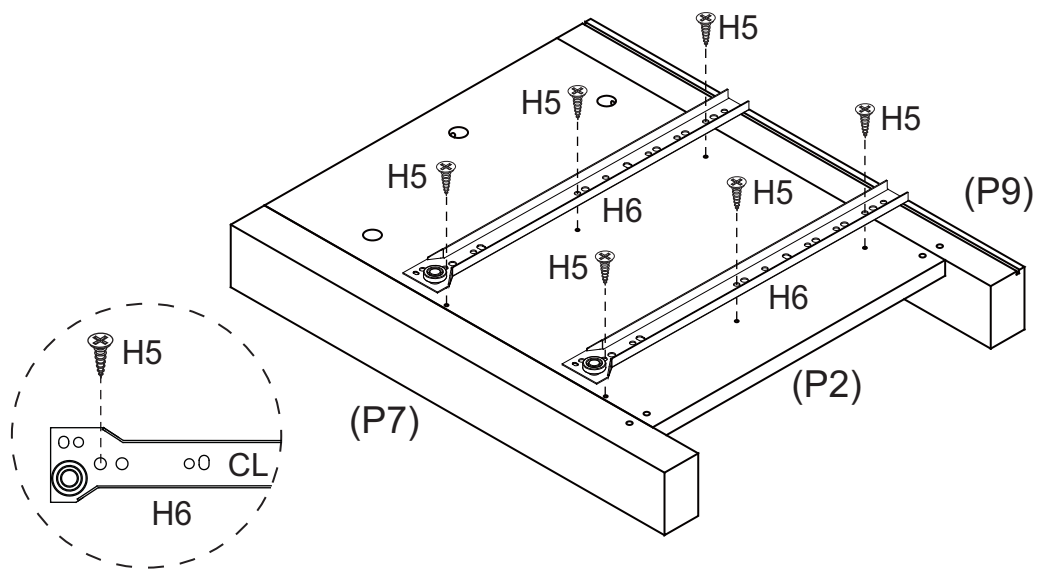
You will need	
	
2 x CL Runner Tracks (H6)	6 x Small Screws (H5)
	
Phillips head screwdriver	



Attach 2 x CL Runner Tracks (H6) to Left Side Panel (P2) with 6 x Small Screws (H5).



## Step 5


You will need	
	
2 x CR Runner Tracks (H7)	6 x Small Screws (H5)
	
Phillips head screwdriver	

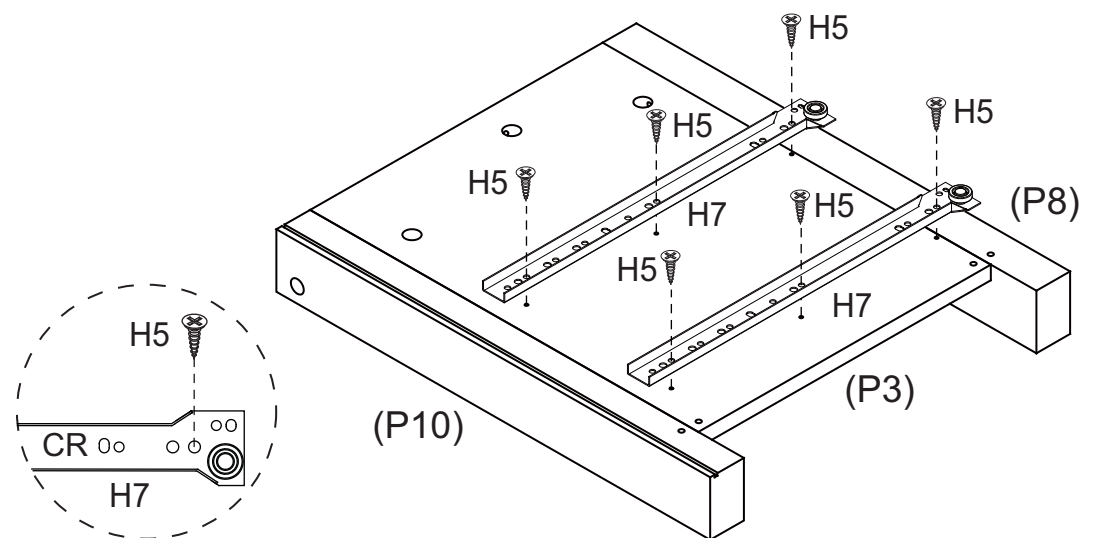

Attach 2 x CR Runner Tracks (H7) to Right Side Panel (P3) with 6 x Small Screws (H5).




## Step 6

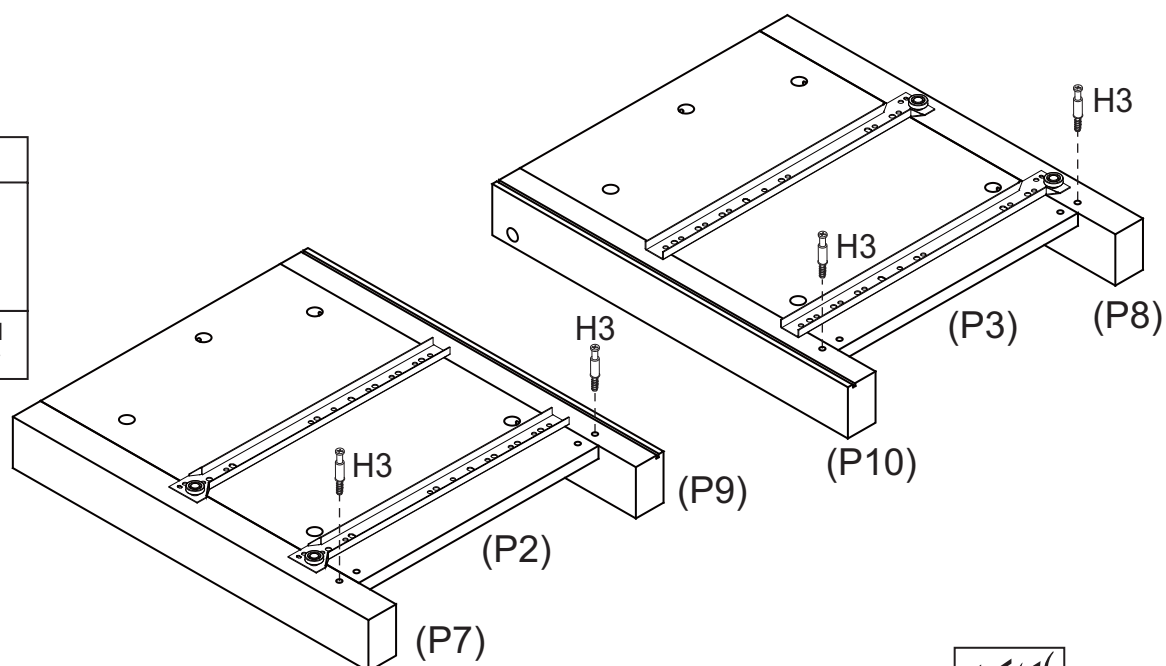
You will need	
	
4 x Cam Bolts (H3)	Phillips head screwdriver



Attach 4 x Cam Bolts (H3) into Side Panels (P2, P3) and Legs (P7, P8, P9, P10).

## Step 7

You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Flat head screwdriver	

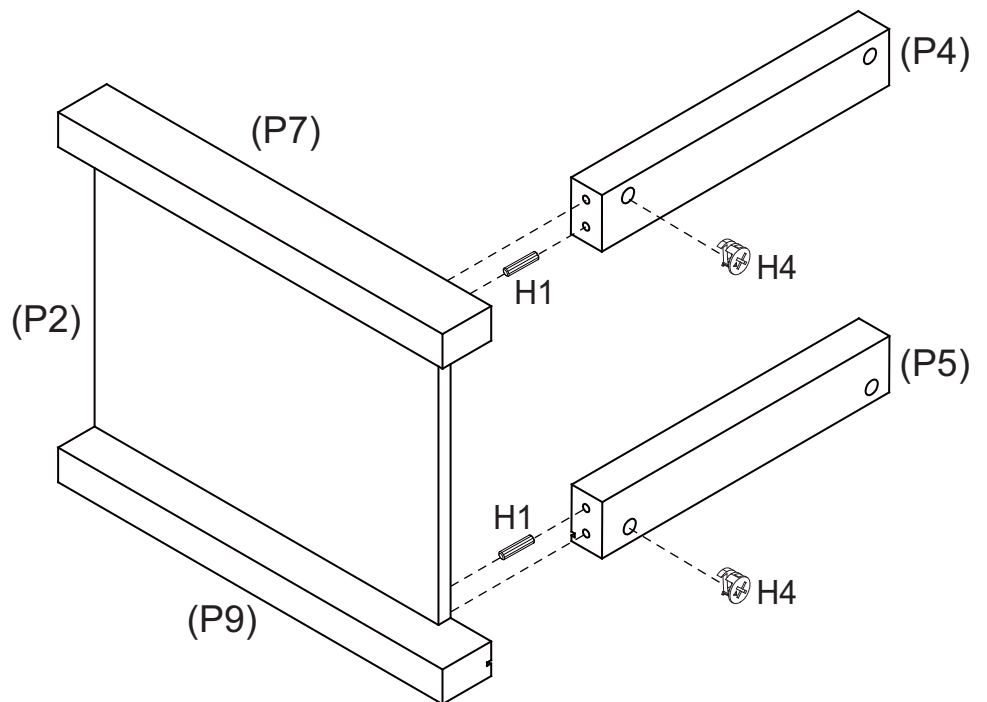

Insert 2 x Dowels (H1) into Rails (P4, P5).




Insert 2 x Cam Nuts (H4) into the holes of Rails (P4, P5).


Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Align the holes and attach Legs (P7, P9) to Left Side Panel (P2).

Tighten the cam nuts.

## Step 8

You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Flat head screwdriver	

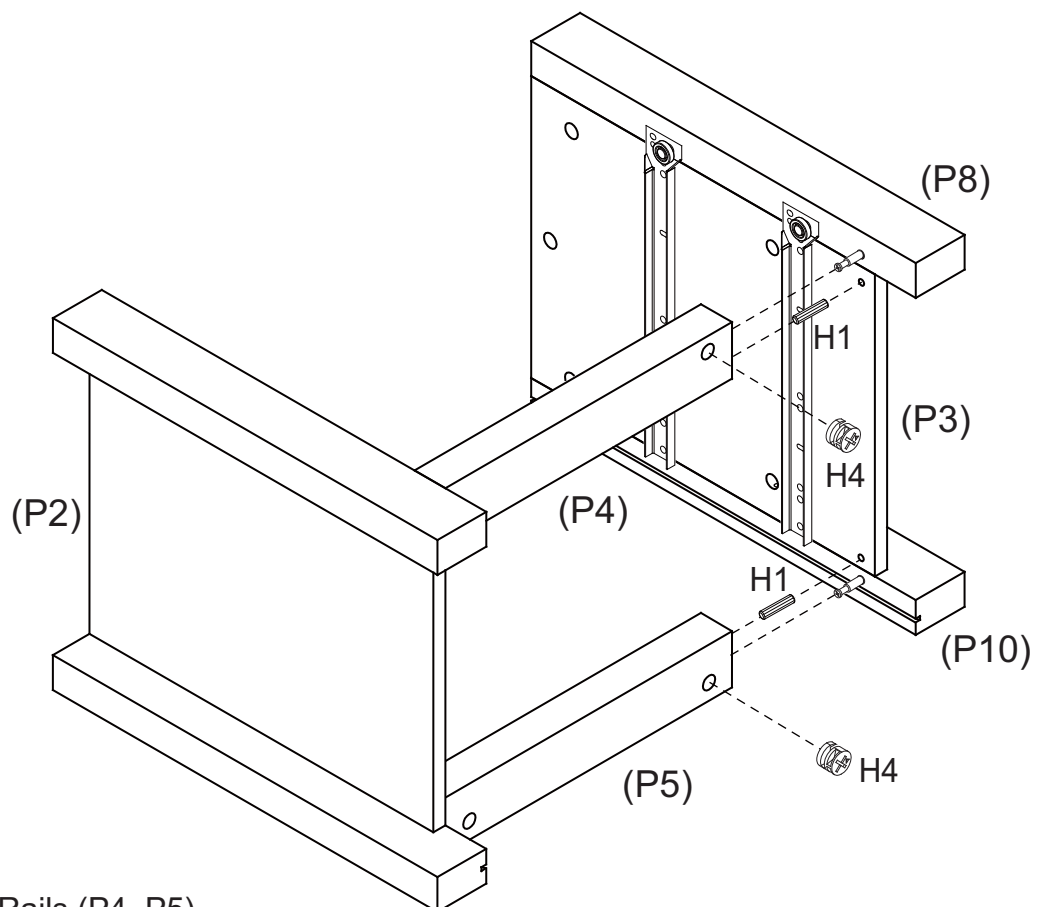

Insert 2 x Dowels (H1) into Rails (P4, P5).



Insert 2 x Cam Nuts (H4) into the holes of Rails (P4, P5).


Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Align the holes and attach Legs (P8, P10) to Right Side Panel (P3).

Tighten the cam nuts.


## Step 9


You will need	
	
4 x Plastic Glides (H2)	Hammer

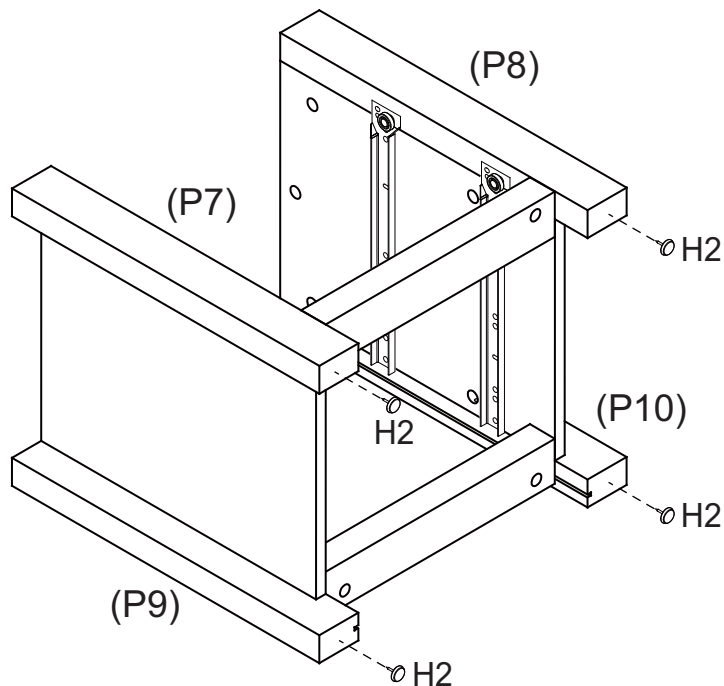

Attach 4 x Plastic Glides (H2) to the bottom of Legs (P7, P8, P9, P10) with a Hammer.



## Step 10

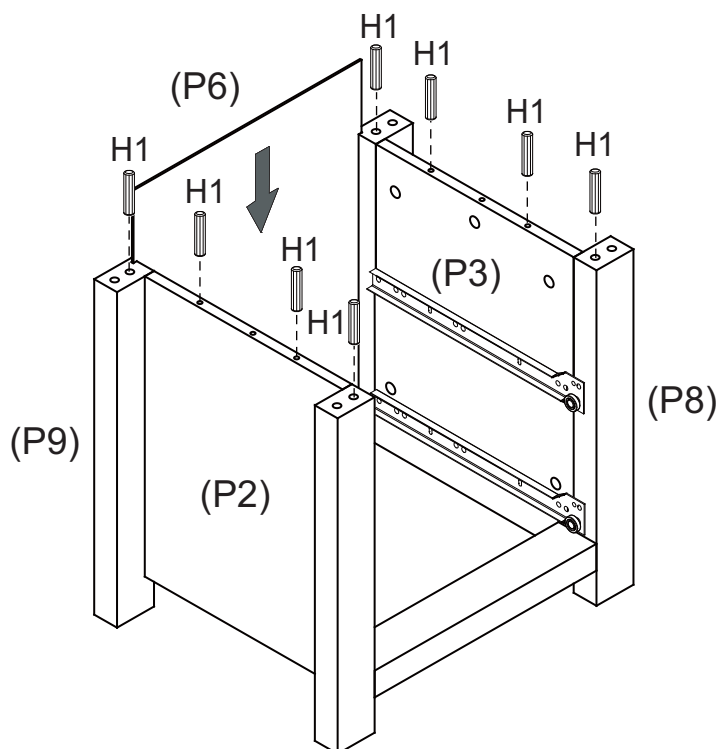
You will need	
	
8 x Dowels (H1)	



Slide Back Panel (P6) into the groove in Legs (P9, P10) and Rail (P5).  
Insert 8 x Dowels (H1) into Side Panels (P2, P3) and Legs (P7, P8, P9, P10).

## Step 11

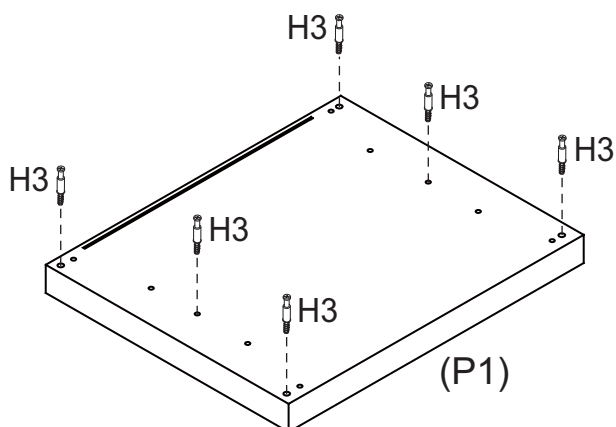

You will need	
	
6 x Cam Bolts (H3)	Phillips head screwdriver




Attach 6 x Cam Bolts (H3) into Top Panel (P1) as shown.






## Step 12


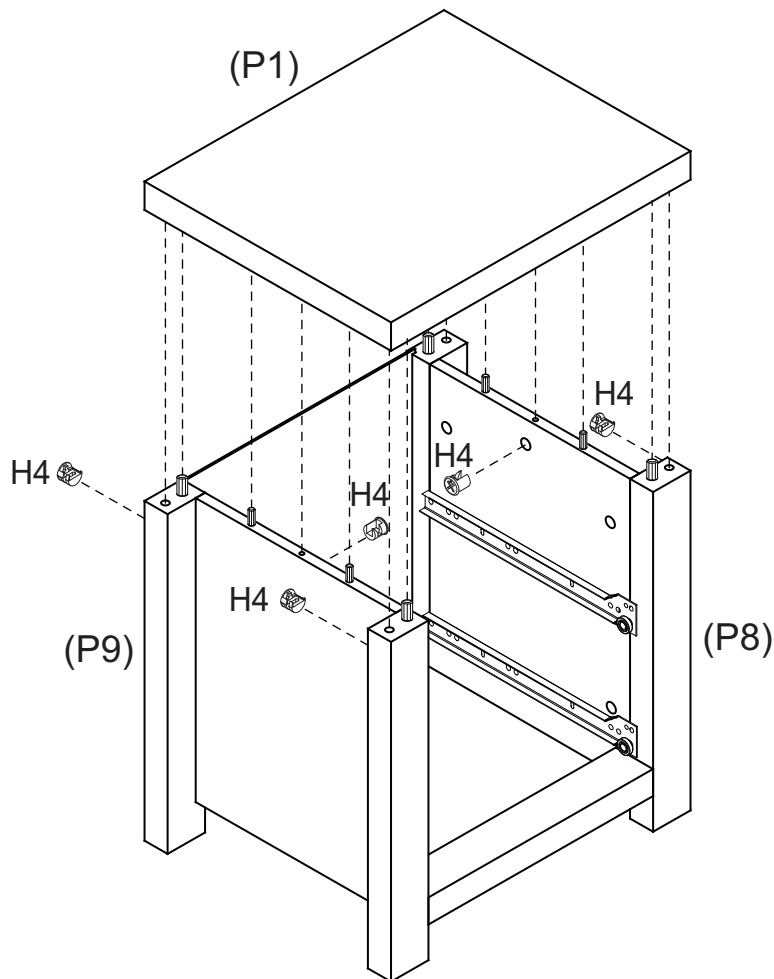
You will need	
	
6 x Cam Nuts (H4)	Flat head screwdriver



Insert 6 x Cam Nuts (H4) into the holes of Side Panels (P2, P3) and Legs (P7, P8, P9, P10). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to the frame and tighten the cam nuts using a Flat head screwdriver.



## Step 13


You will need	
	
4 x Wedges (H15)	4 x Screws (H16)
	
Phillips head screwdriver	

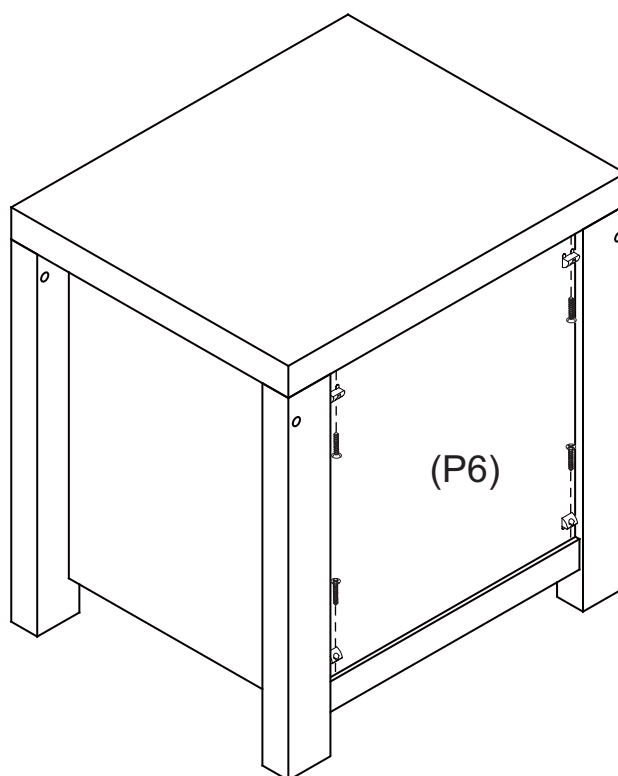

Secure Back Panel (P6) in place with 4 x Wedges (H15) using 4 x Screws (H16).



## Step 14

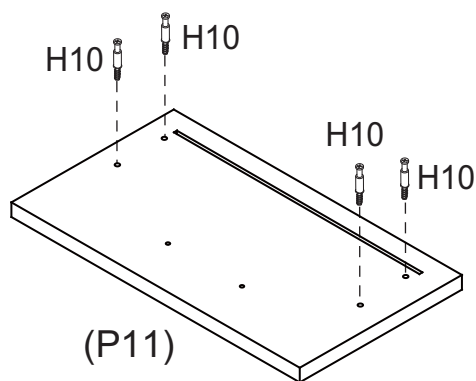
You will need	
	
4 x Small Cam Bolts (H10)	Phillips head screwdriver



Screw 4 x Small Cam Bolts (H10) into Drawer Front (P11) with a Phillips head screwdriver.


## Step 15

You will need	
	
4 x Small Cam Nuts (H11)	Flat head screwdriver

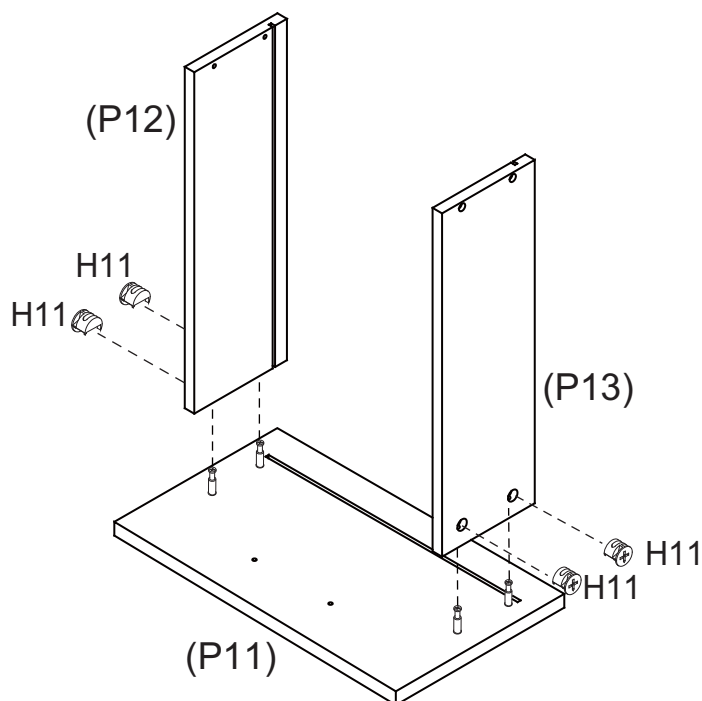



Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P12, P13). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Align the holes together, secure Drawer Sides (P12, P13) into place and tighten the cam nuts using a Flat head screwdriver.
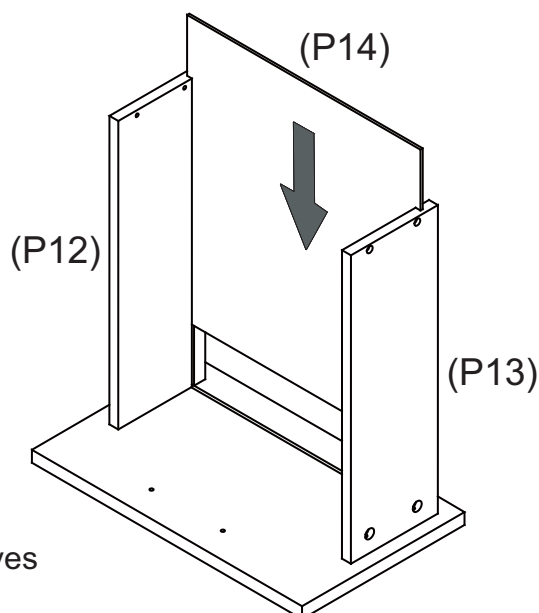
## Step 16




Slide Drawer Base (P14) in through the grooves on Drawer Sides (P12, P13).





## Step 17


You will need	
	
4 x Long Screws(H12)	Phillips head screwdriver

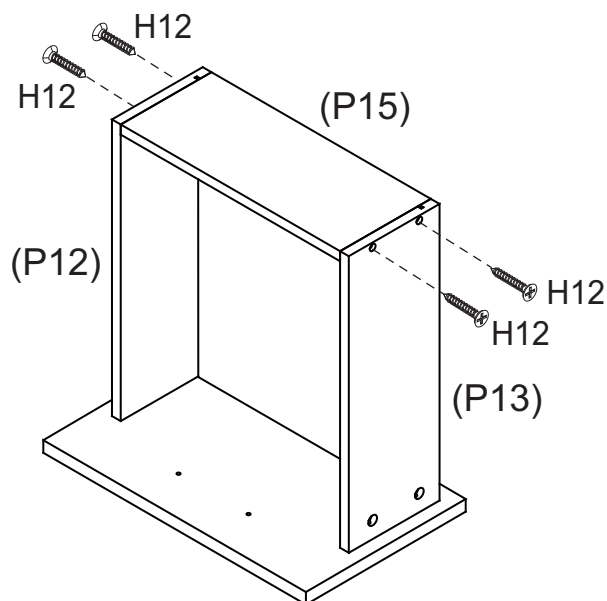Attach Drawer Back (P15) to Drawer Sides (P12, P13) with 4 x Long Screws (H12), make sure that the groove lines up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.






## Step 18


You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
4 x Small Screws (H5)	Phillips head screwdriver

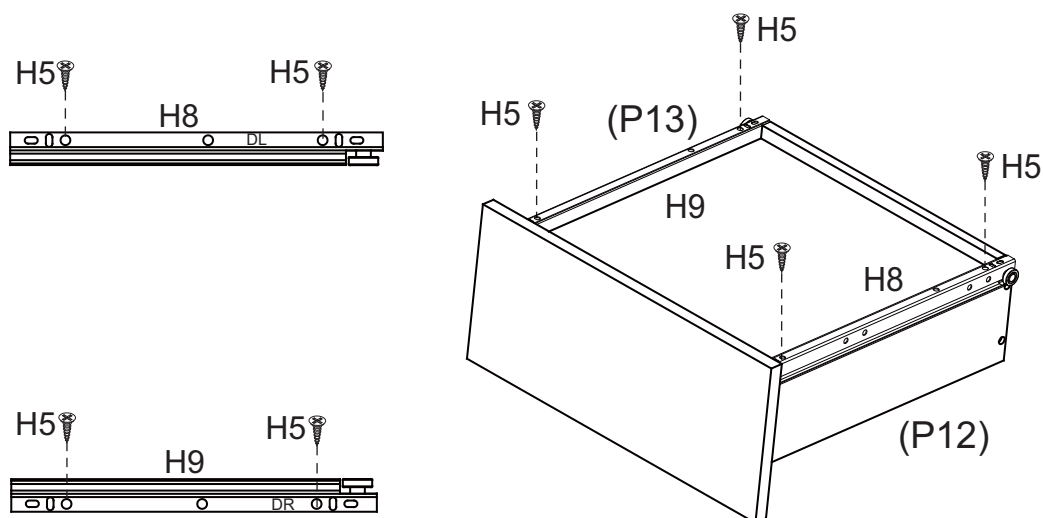

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P12) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P13) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


## Step 19

You will need	
	
1 x Handle (H13)	2 x Round Head Bolts (H14)
	
Phillips head screwdriver	

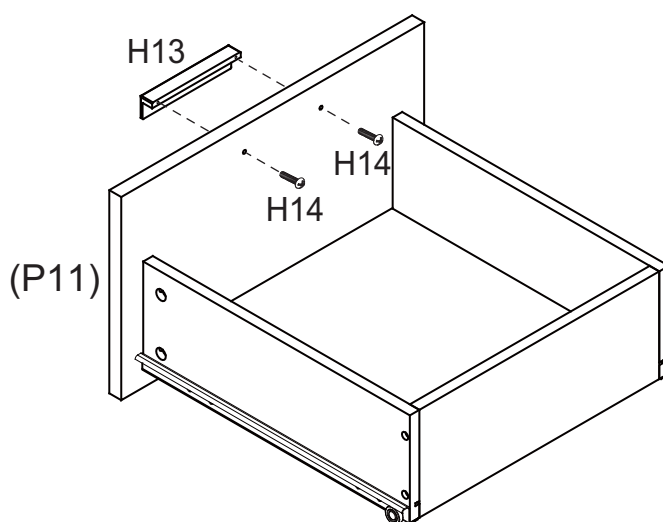


Attach 1 x Handle (H13) to Drawer Front (P11) with 2 x Round Head Bolts (H14). Tighten round head bolts using a Phillips head screwdriver. Repeat Step 14 to Step 19 to assemble the other drawer.

## Step 20

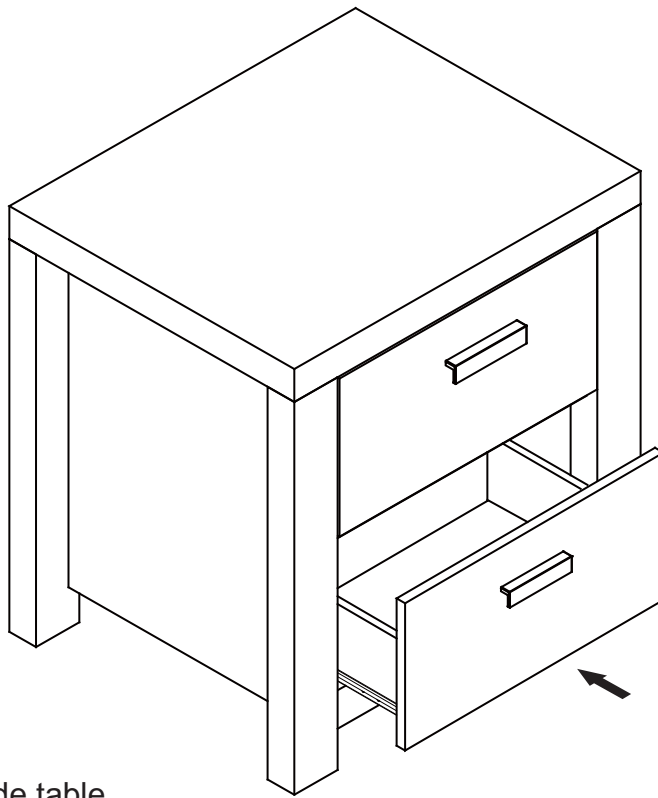

Slide the drawers into the bedside table.

## Step 21

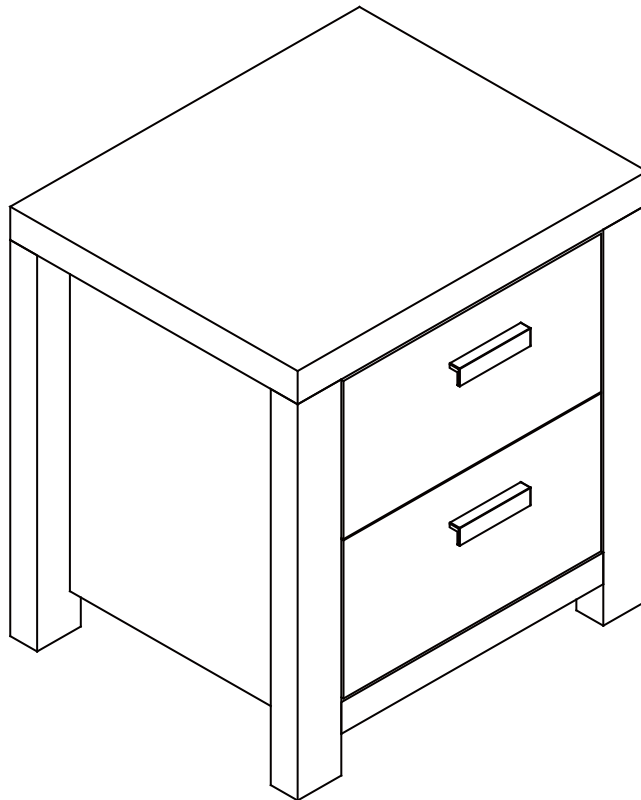


**Recommended weight capacity : 80KG.**

# **Job Complete!**

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.0

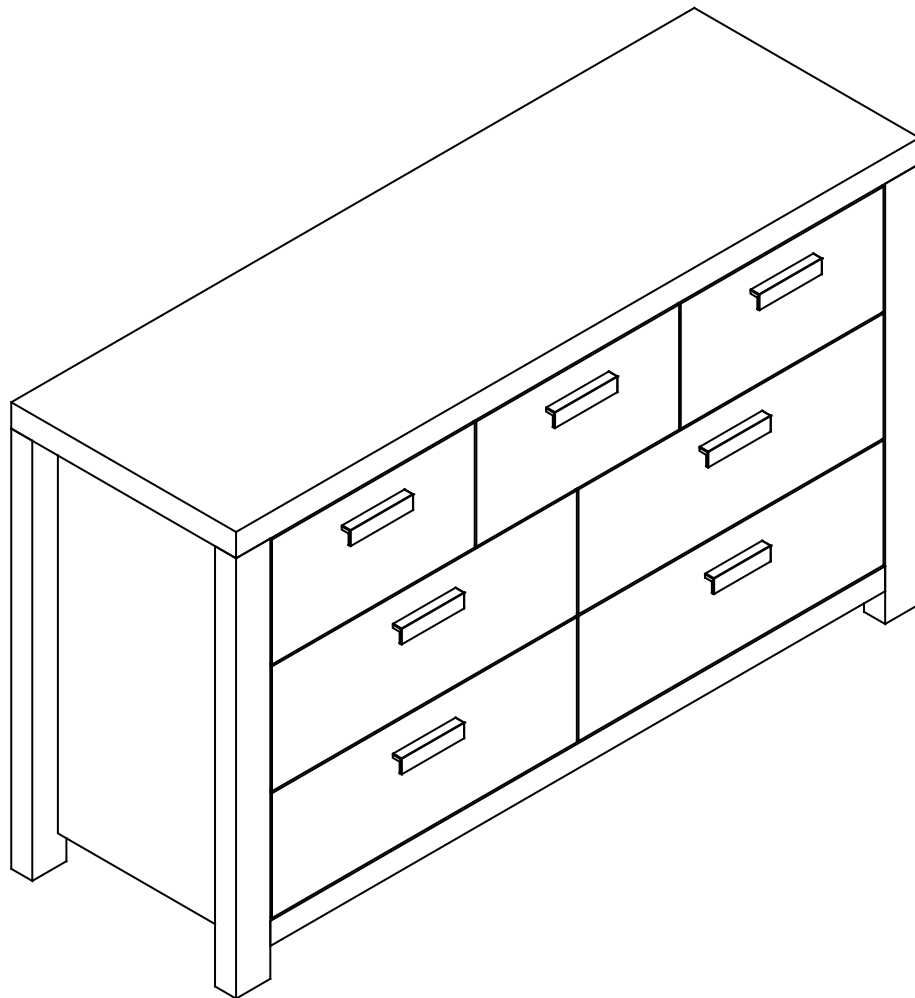

TWO PEOPLE



REQUIRED

# HAVANA

Dresser 7 Drawer

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)

**Enjoy**  
Your purchase from  
Australia's Best Value Furniture Store




**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO  
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been fitted with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.


# Assembly checklist




Read through the instructions carefully before you begin.

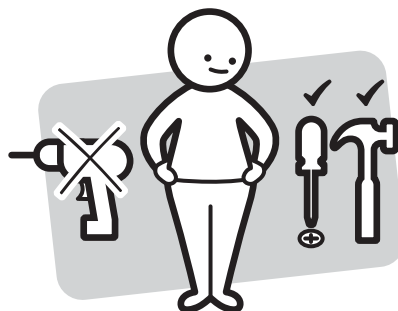

Make sure you have all the required tools.  
Never use power tools unless instructed.

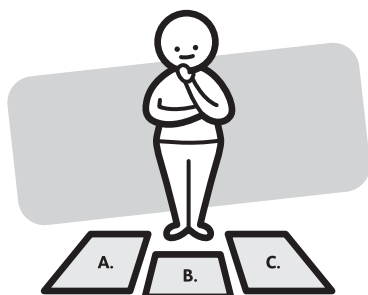

Identify and lay out all of the components before you begin assembly.

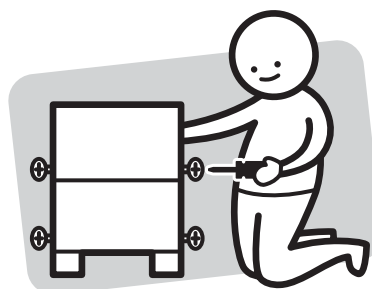

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

# What you need

to assemble the product



DO NOT USE



## Additional Tools Required





Flat head screwdriver;  
Phillips head screwdriver;  
Hammer

## Parts list

**Box 1:** Top Panel (P1);  
Left Side Panel (P2);  
Right Side Panel (P3); 2 x Dividers (P4);  
2 x Rails (P5); Divider (P6);  
LF Leg (P7); RF Leg (P8);  
LR Leg (P9); RR Leg (P10);  
Rail (P11); Rail (P12);  
Back Panel (P13);



**Box 2:** Smaller Drawer Front (P14);  
Smaller Drawer Front (P15);  
Smaller Drawer Front (P16);  
7 x Left Drawer Side (P17);  
7 x Right Drawer Side (P18);  
3 x Smaller Drawer Base (P19);  
3 x Smaller Drawer Back (P20);  
2 x Larger Drawer Front (P21);  
2 x Larger Drawer Front (P22);  
4 x Larger Drawer Base (P23);  
4 x Larger Drawer Back (P24);  
LF: Left Front LR: Left Rear  
RF: Right Front RR: Right Rear

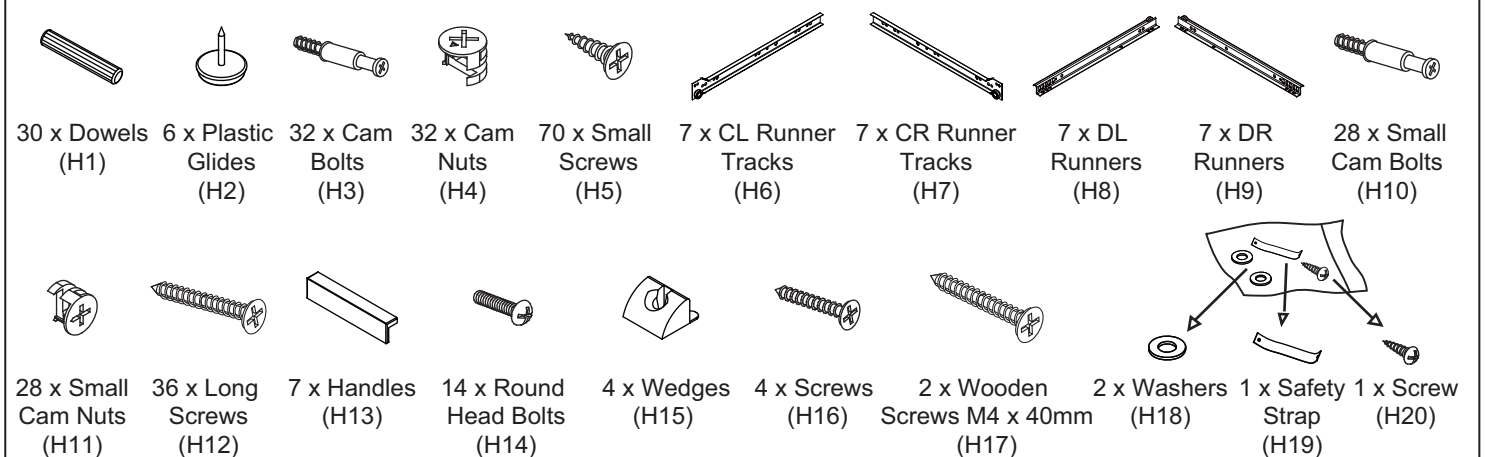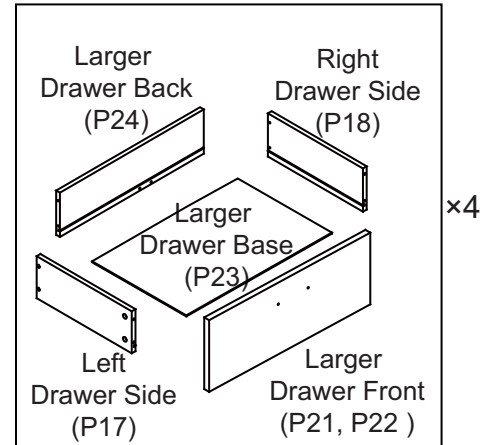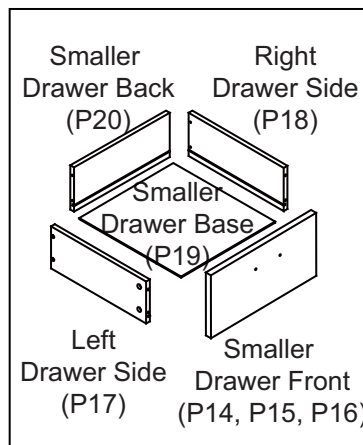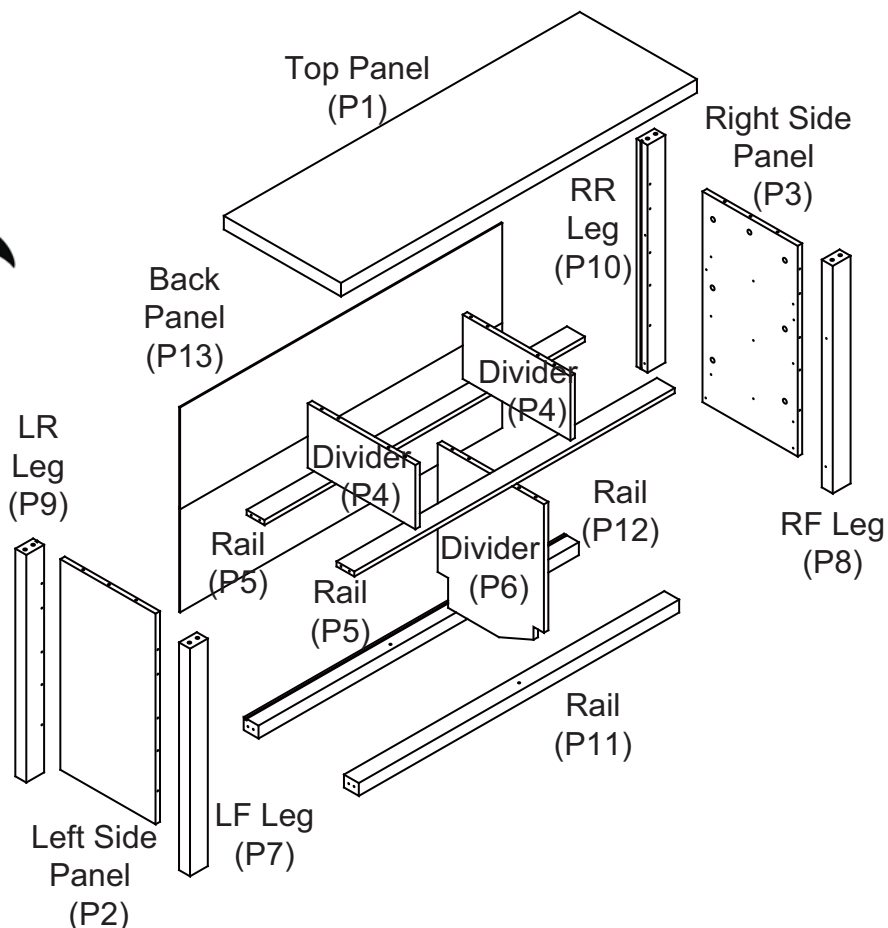
## Hardware pack








# Step 1

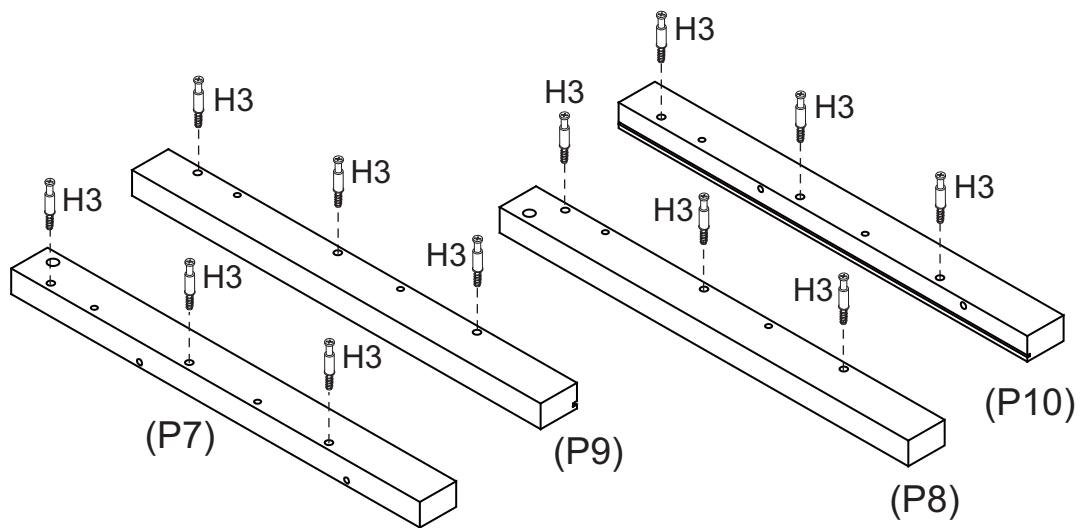
You will need	
	
12 x Cam Bolts (H3)	Phillips head screwdriver



Attach 12 x Cam Bolts (H3) into Legs (P7, P8, P9, P10).


# Step 2

You will need	
	
4 x Dowels (H1)	6 x Cam Nuts (H4)
	
Flat head screwdriver	

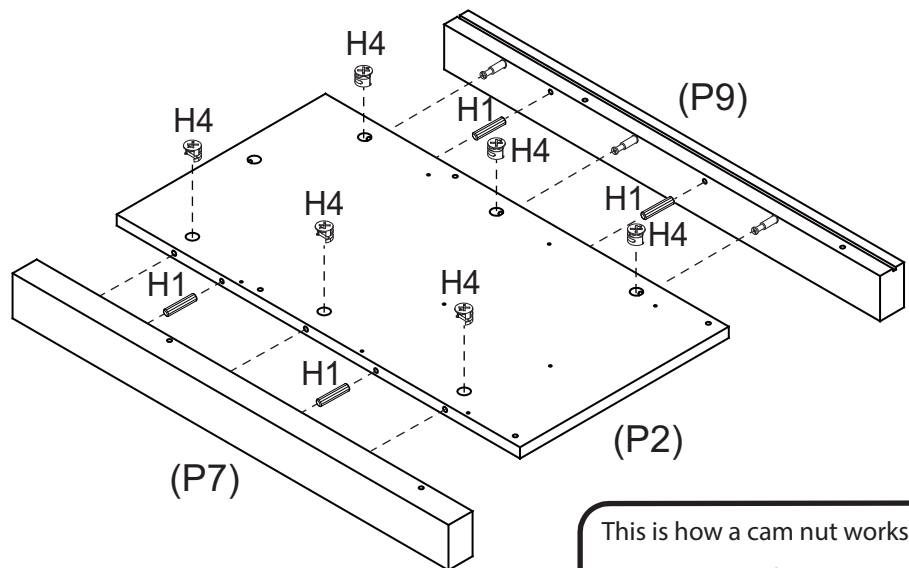




Insert 4 x Dowels (H1) into the holes of Left Side Panel (P2).  
 Insert 6 x Cam Nuts (H4) into the holes of Left Side Panel (P2).  
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
 Attach Legs (P7, P9) to Left Side Panel (P2), then tighten the cam nuts.


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.





# Step 3



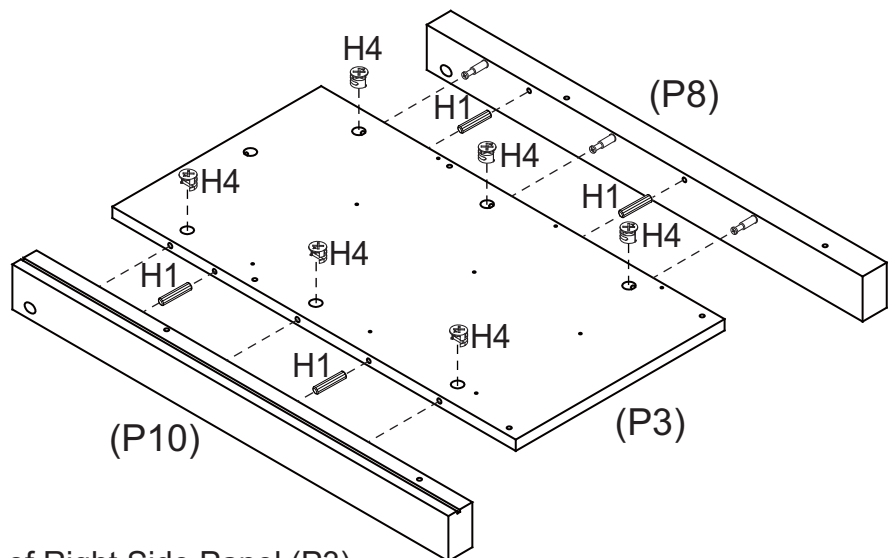
You will need	
	
4 x Dowels (H1)	6 x Cam Nuts (H4)
	
Flat head screwdriver	



Insert 4 x Dowels (H1) into the holes of Right Side Panel (P3).  
 Insert 6 x Cam Nuts (H4) into the holes of Right Side Panel (P3).  
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
 Attach Legs (P8, P10) to Right Side Panel (P3), then tighten the cam nuts.



## Step 4


You will need	
	
3 x CL Runner Tracks (H6)	3 x CR Runner Tracks (H7)
	
18 x Small Screws (H5)	Phillips head screwdriver

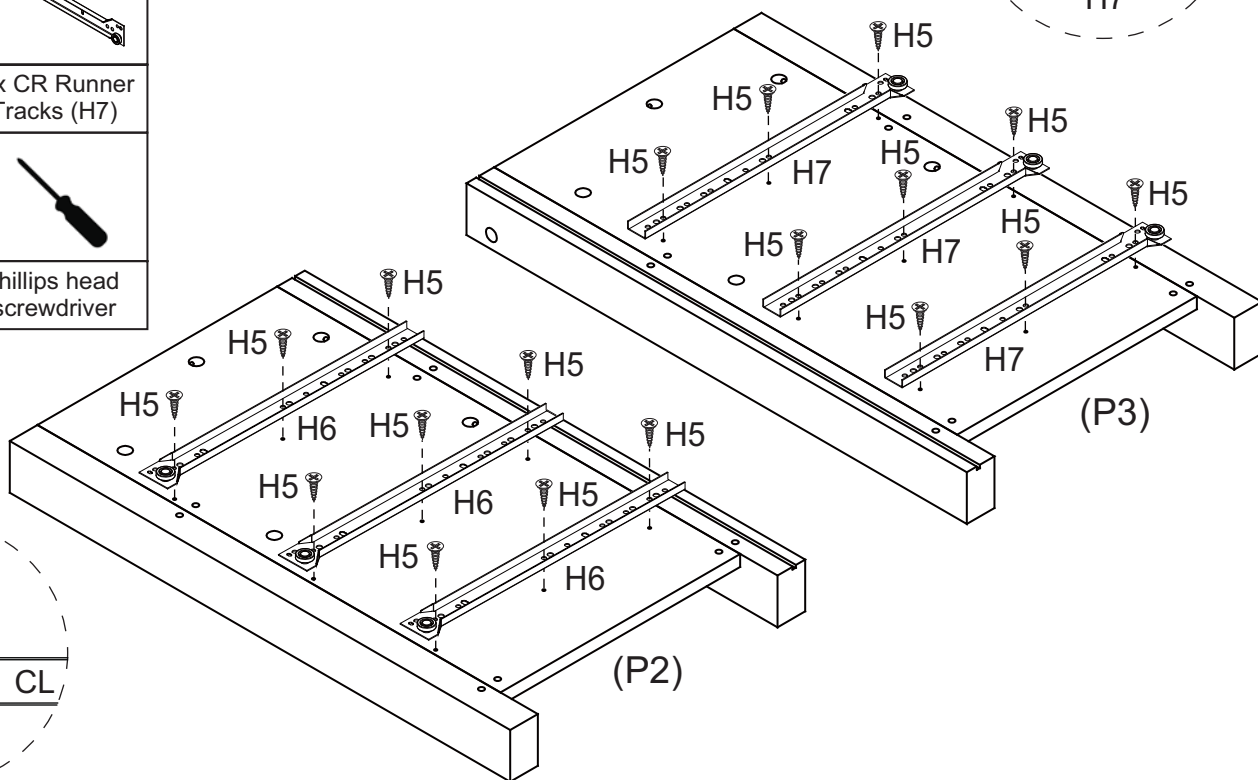

Attach 3 x CL Runner Tracks (H6) to Left Side Panel (P2) with 9 x Small Screws (H5).  
Attach 3 x CR Runner Tracks (H7) to Right Side Panel (P3) with 9 x Small Screws (H5).





## Step 5

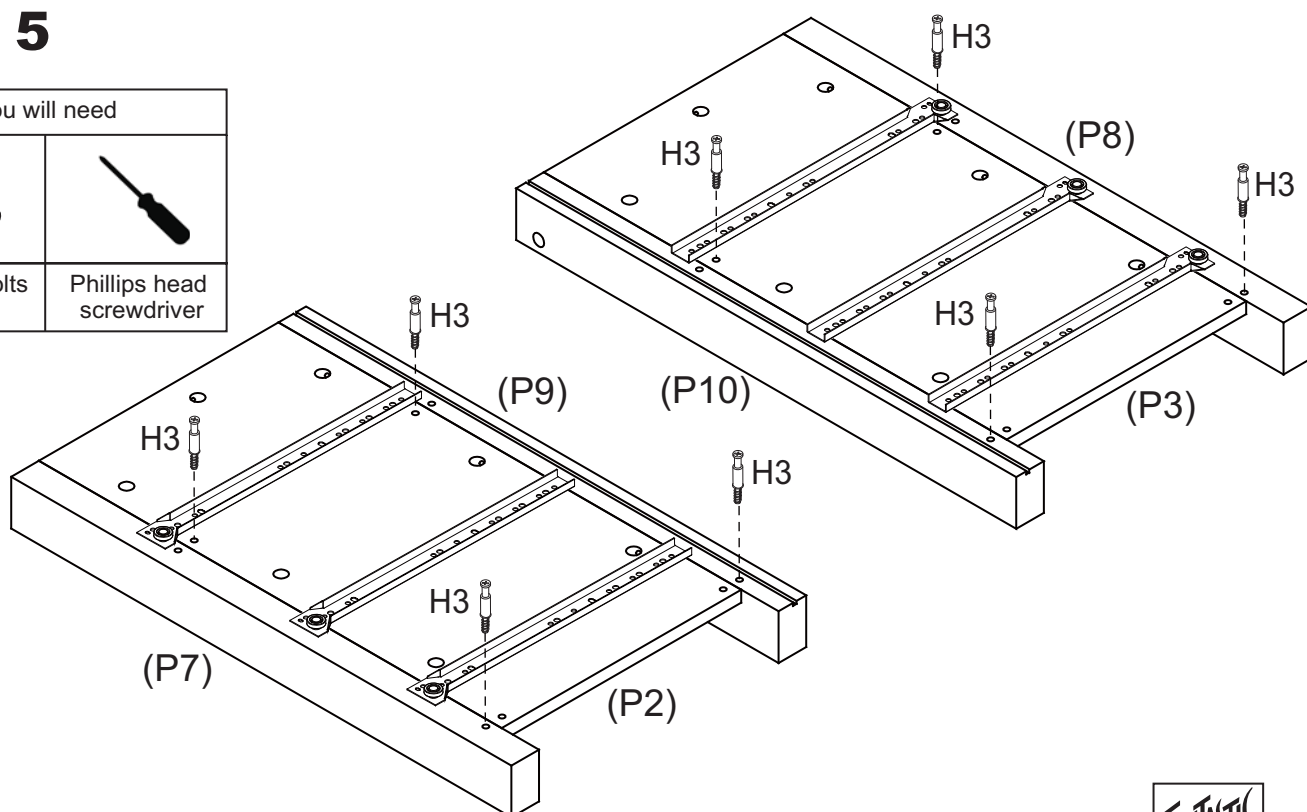
You will need	
	
8 x Cam Bolts (H3)	Phillips head screwdriver



Attach 8 x Cam Bolts (H3) into Side Panels (P2, P3) and Legs (P7, P8, P9, P10).




## Step 6

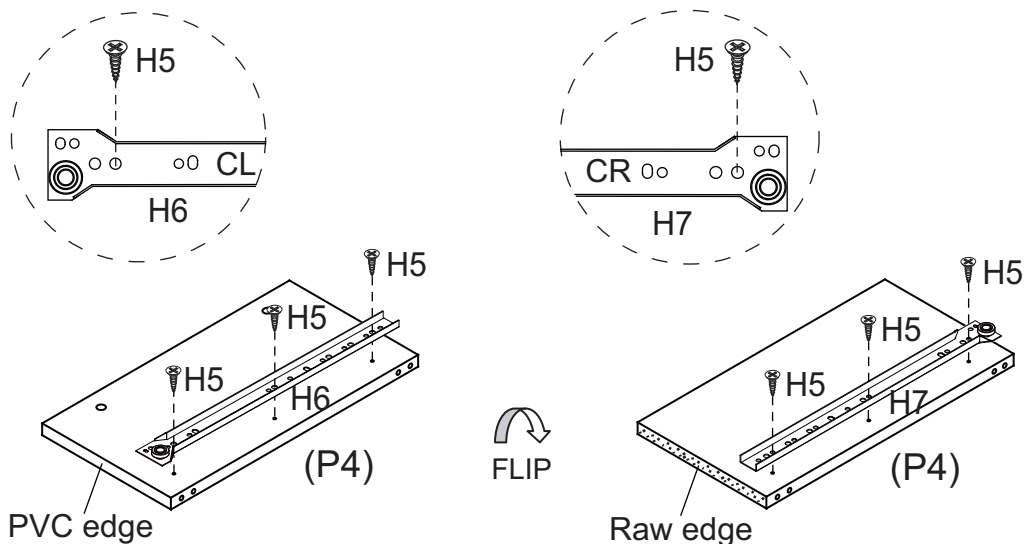
You will need	
	
2 x CL Runner Tracks (H6)	2 x CR Runner Tracks (H7)
	
12 x Small Screws (H5)	Phillips head screwdriver



Attach 1 x CL Runner Track (H6) to Divider (P4) with 3 x Small Screws (H5). Turn Divider (P4) over to the other side, then attach 1 x CR Runner Track (H7) with 3 x Small Screws (H5). Repeat Step 6 for the other Divider (P4).





## Step 7

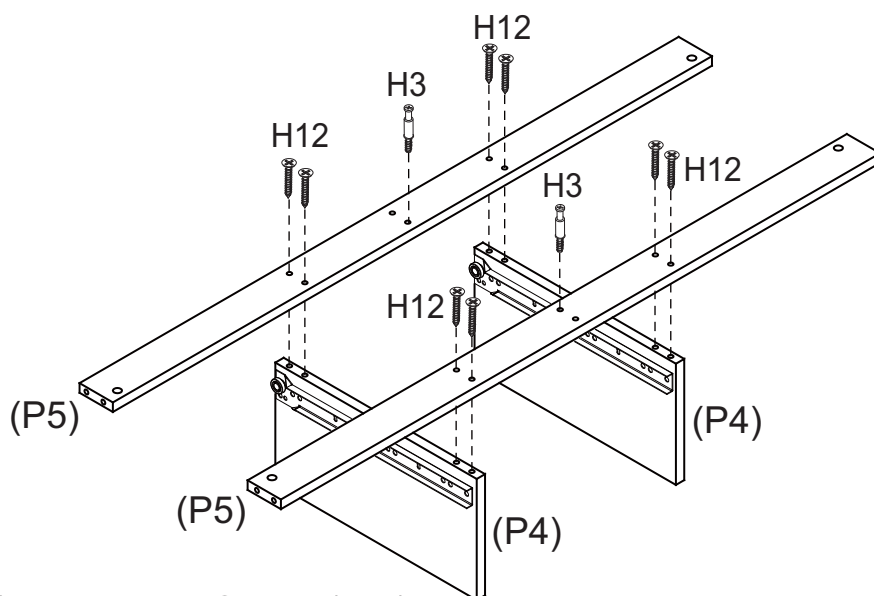
You will need	
	
2 x Cam Bolts (H3)	8 x Long Screws (H12)
	
Phillips head screwdriver	



Attach Rails (P5) to Dividers (P4) with 8 x Long Screws (H12). Insert 2 x Cam Bolts (H3) into the holes of Rails (P5).



## Step 8

You will need	
	
2 x CL Runner Tracks (H6)	2 x CR Runner Tracks (H7)
	
12 x Small Screws (H5)	Phillips head screwdriver

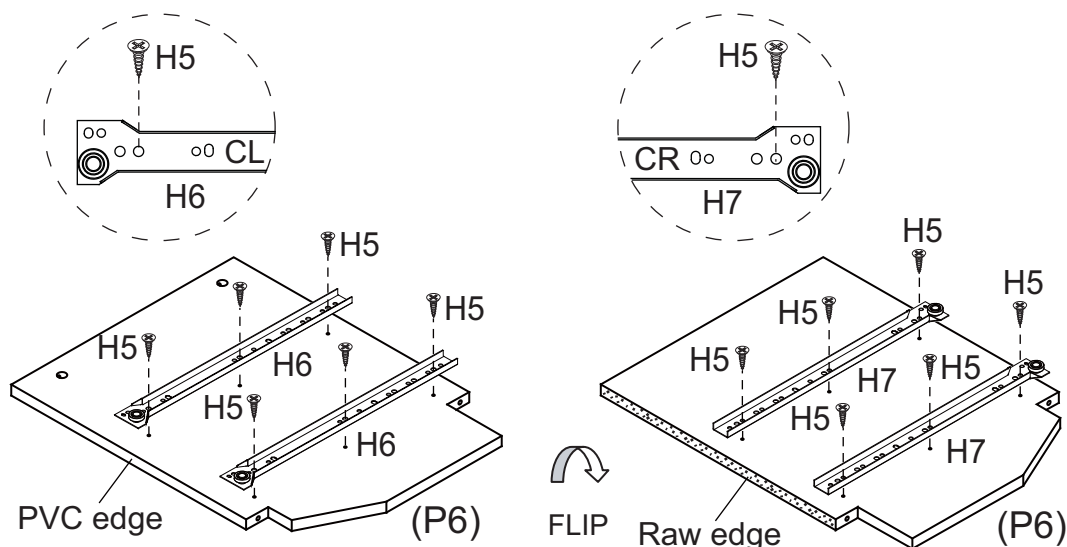

Attach 2 x CL Runner Tracks (H6) to Divider (P6) with 6 x Small Screws (H5). Turn Divider (P6) over to the other side, then attach 2 x CR Runner Tracks (H7) with 6 x Small Screws (H5).


## Step 9

You will need	
	
2 x Wooden Screws M4 x 40mm (H17)	Phillips head screwdriver

TWO PEOPLE



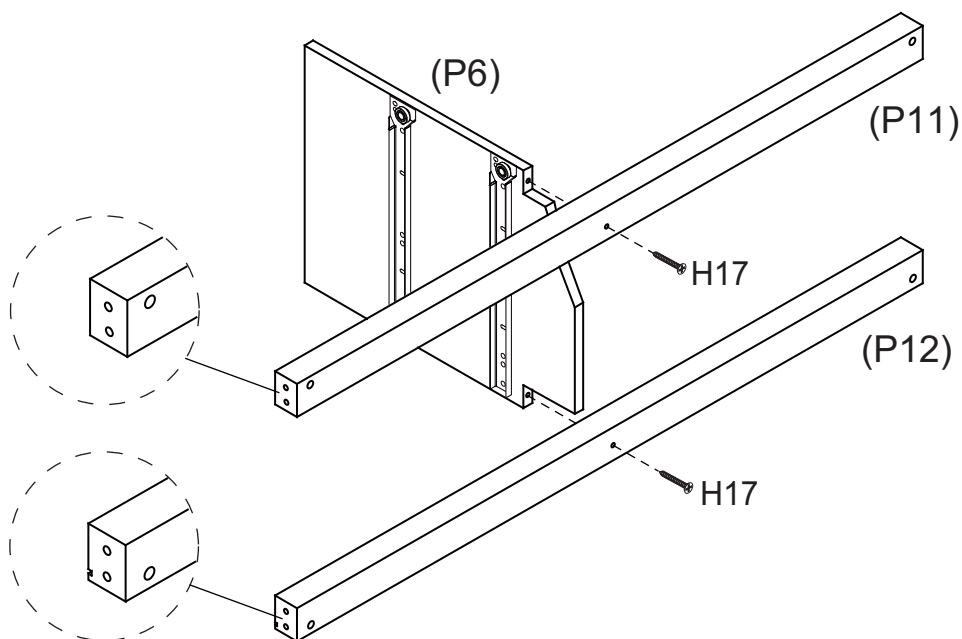


REQUIRED



Attach Rails (P11, P12) to Divider (P6) with 2 x Wooden Screws (H17) using a Phillips head screwdriver.


## Step 10

You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Flat head screwdriver	

TWO PEOPLE





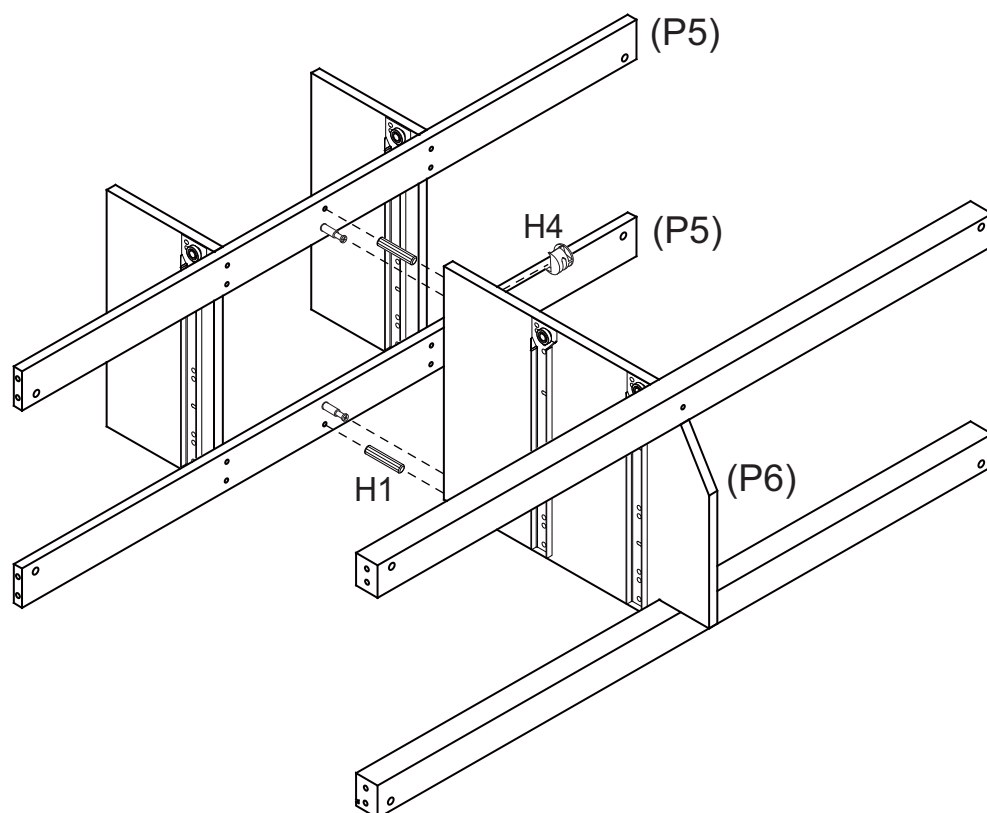

REQUIRED




Insert 2 x Dowels (H1) into the holes of Rails (P5).  
 Insert 2 x Cam Nuts (H4) into the holes of Divider (P6).  
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
 Push Rails (P5) into place and tighten the cam nuts.

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)

## Step 11

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Flat head screwdriver	Hammer

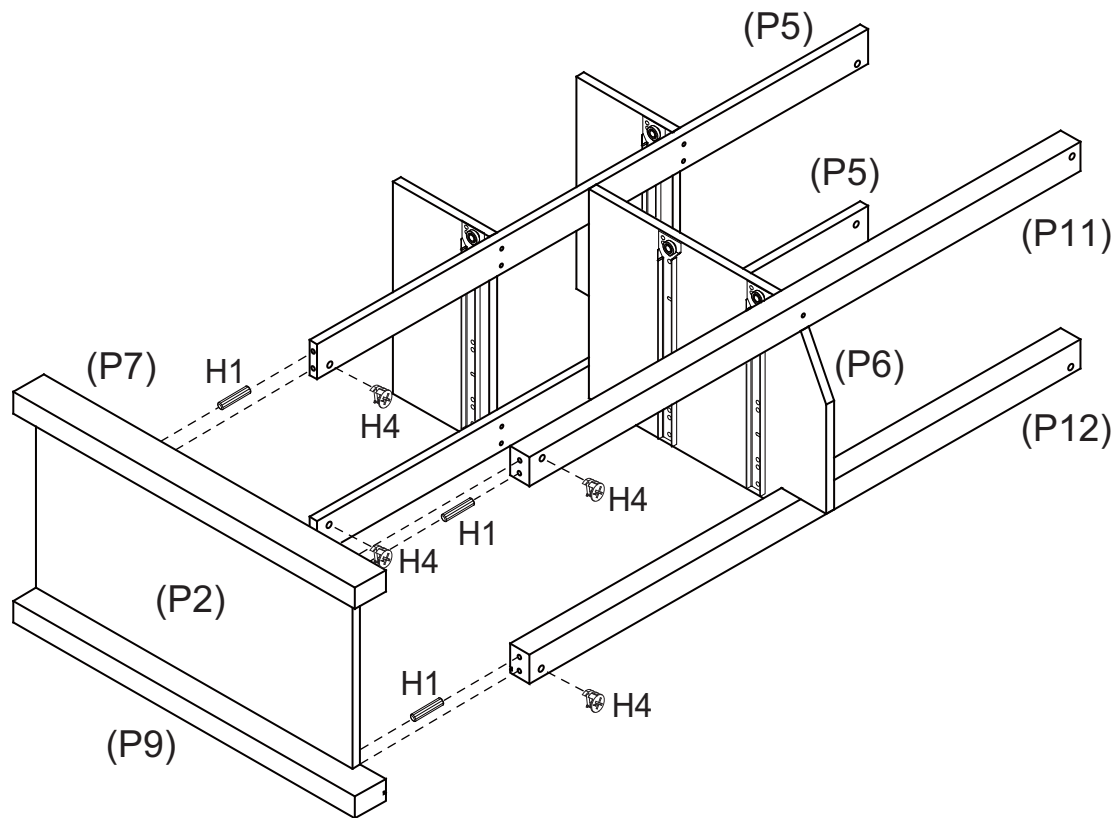






Insert 4 x Dowels (H1) into Rails (P5, P11, P12).


Insert 4 x Cam Nuts (H4) into the holes of Rails (P5, P11, P12).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Left Side Panel (P2) with Rails (P5, P11, P12) securely, and tighten the cam nuts.

## Step 12

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
6 x Plastic Glides (H2)	Flat head screwdriver
	
Hammer	

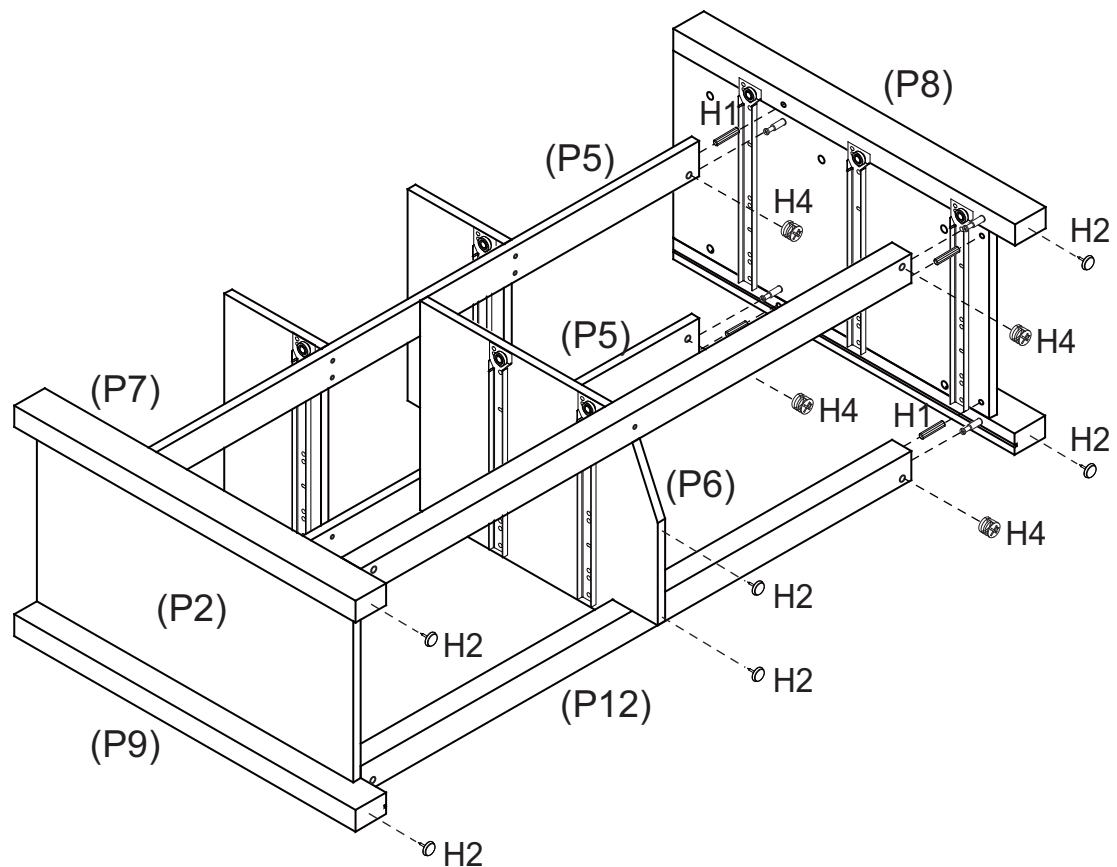

Insert 4 x Dowels (H1) into Rails (P5, P11, P12).


Insert 4 x Cam Nuts (H4) into the holes of Rails (P5, P11, P12 ).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Right Side Panel (P2) with Rails (P5, P11, P12) securely and tighten the cam nuts.

Attach 6 x Plastic Glides (H2) on Legs (P7, P8, P9, P10) and Divider (P6) with a Hammer.

## Step 13

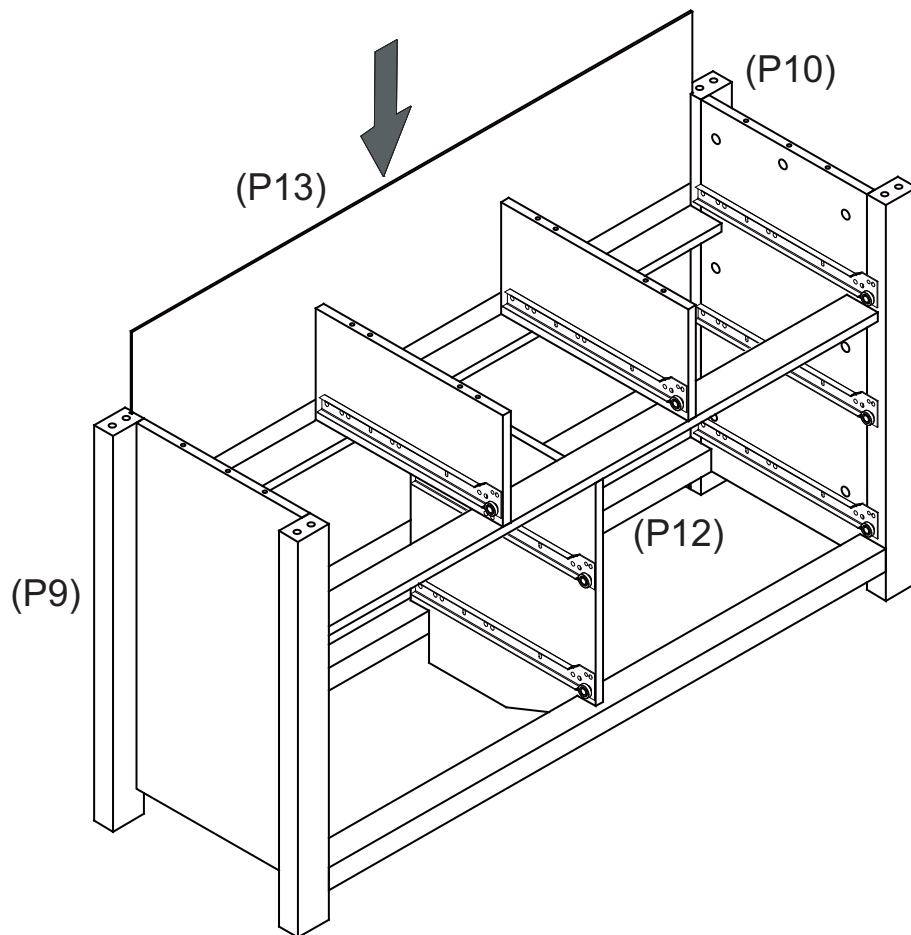

TWO PEOPLE




REQUIRED

Carefully turn the cabinet over to an upright position.  
Slide Back Panels (P13) in through the grooves of Legs (P9, P10) and Rail (P12).

## Step 14

You will need	
10 x Cam Bolts (H3)	Phillips head screwdriver

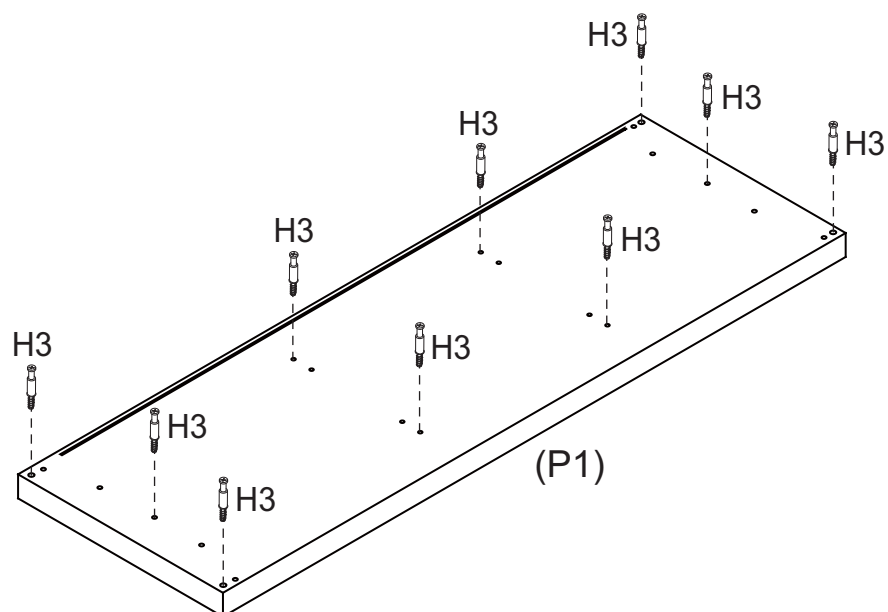


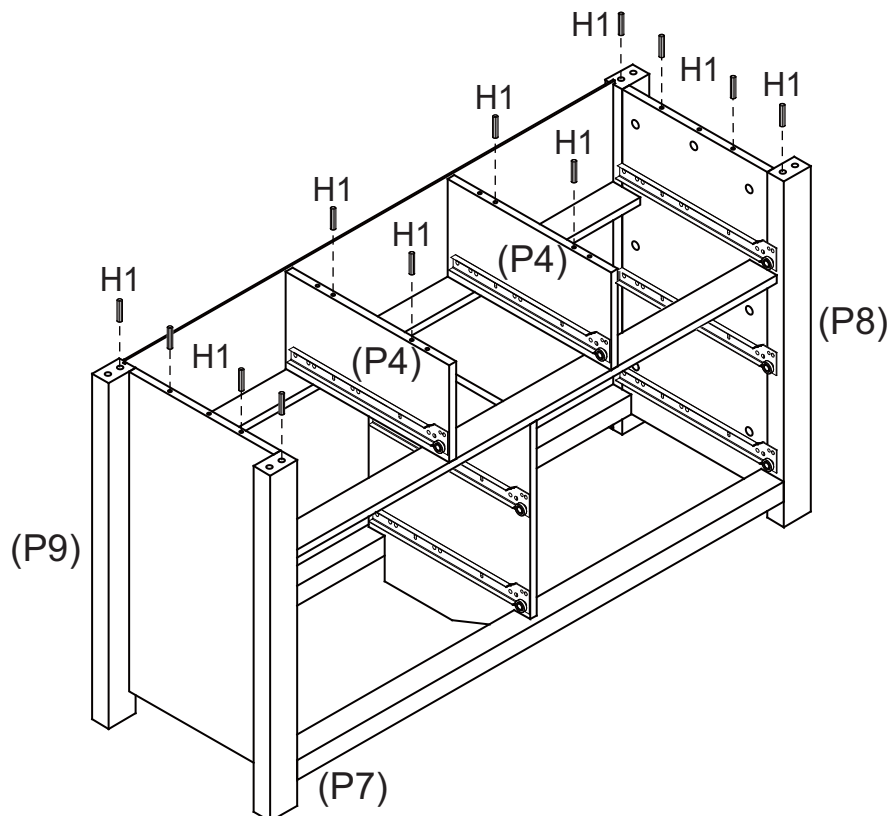
Attach 10 x Cam Bolts (H3) into Top Panel (P1) as shown.

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)





## Step 15


You will need	
	
12 x Dowels (H1)	



Insert 12 x Dowels (H1) into Side Panels (P2, P3), Dividers (P4) and Legs (P7, P8, P9, P10) as shown.

## Step 16

You will need	
	
10 x Cam Nuts (H4)	Flat head screwdriver

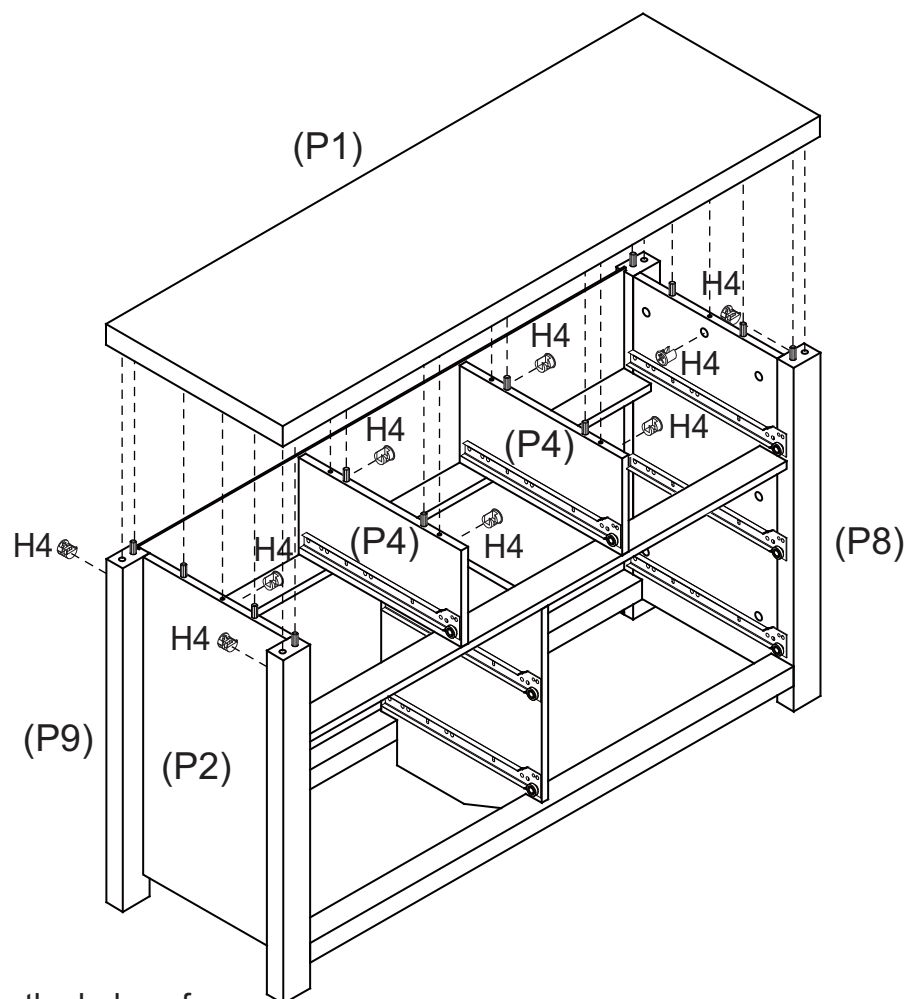

**TWO PEOPLE**







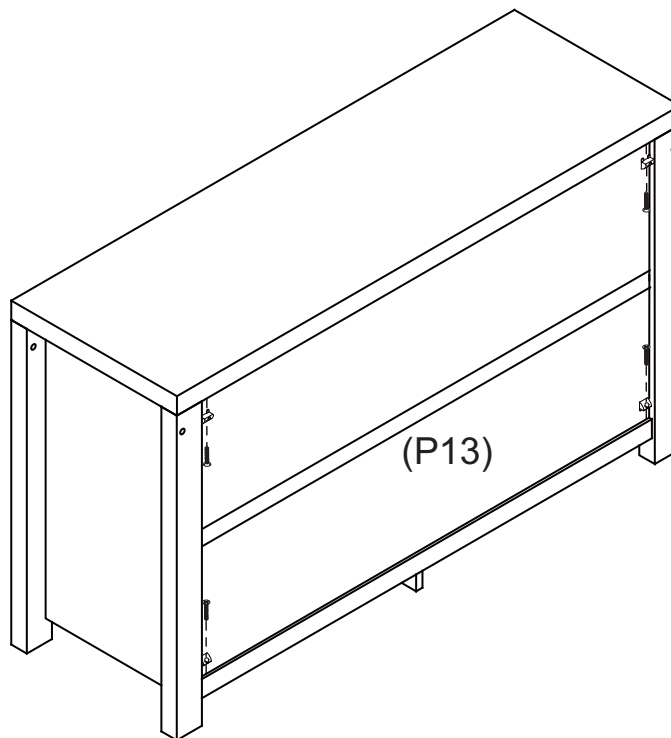
**REQUIRED**

Insert 10 x Cam Nuts (H4) into the holes of Side Panels (P2, P3), Dividers (P4) and Legs (P7, P8, P9, P10). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to the frame and then tighten the cam nuts using a Flat head screwdriver.

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)



## Step 17


You will need	
	
4 x Wedges (H15)	4 x Screws (H16)
	
Phillips head screwdriver	



Secure Back Panel (P13) in place with 4 x Wedges (H15) using 4 x Screws (H16).



## Step 18

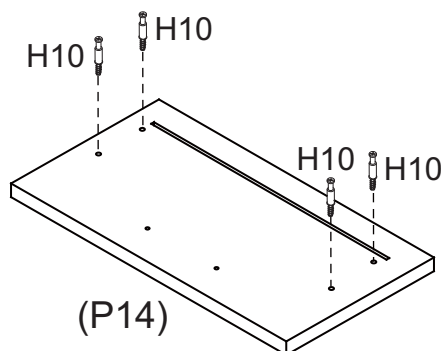
You will need	
	
4 x Small Cam Bolts (H10)	Phillips head screwdriver



Screw 4 x Small Cam Bolts (H10) into Smaller Drawer Front (P14) with a Phillips head screwdriver.

## Step 19

You will need	
	
4 x Small Cam Nuts (H11)	Flat head screwdriver

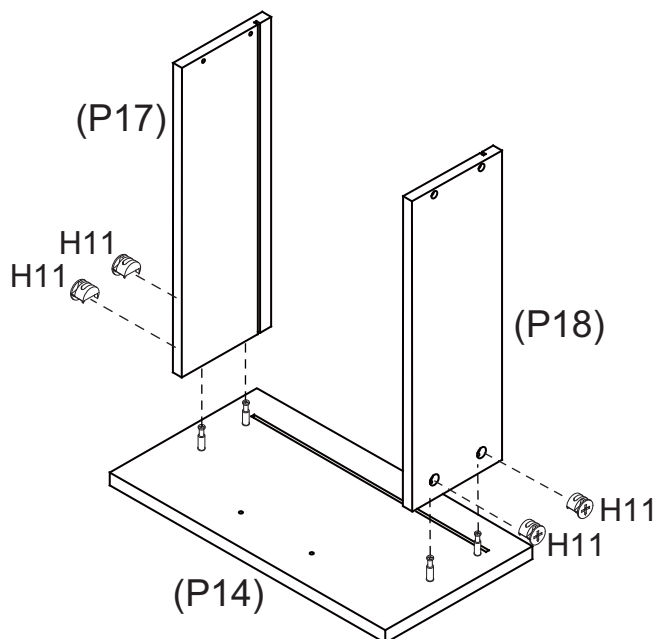


Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P17, P18). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Sides (P17, P18) with Smaller Drawer Front (P14), and then tighten the cam nuts.

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)



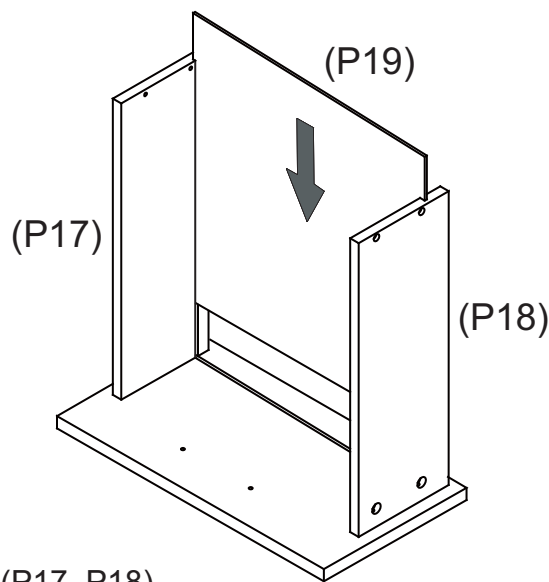


## Step 20



Slide Smaller Drawer Base (P19)  
in through the grooves of Drawer Sides (P17, P18).





## Step 21


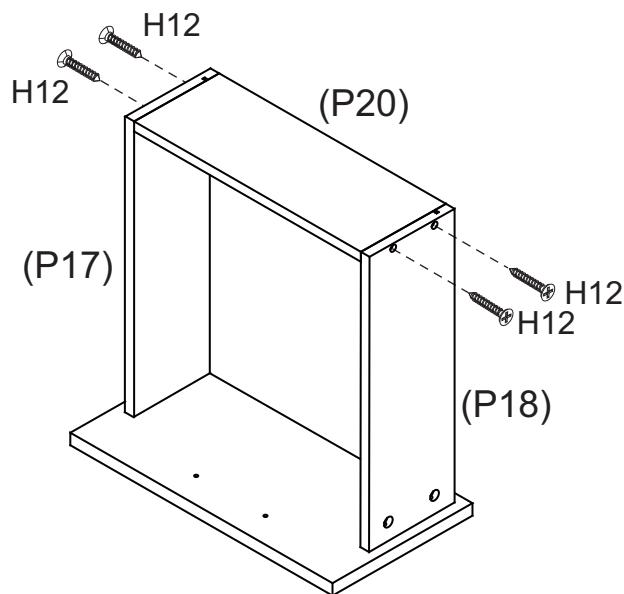
You will need	
	
4 x Long Screws(H12)	Phillips head screwdriver



Attach Smaller Drawer Back (P20) to Drawer Sides (P17, P19) with 4 x Long Screws (H12), make sure that the grooves line up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.




## Step 22


You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
4 x Small Screws (H5)	Phillips head screwdriver

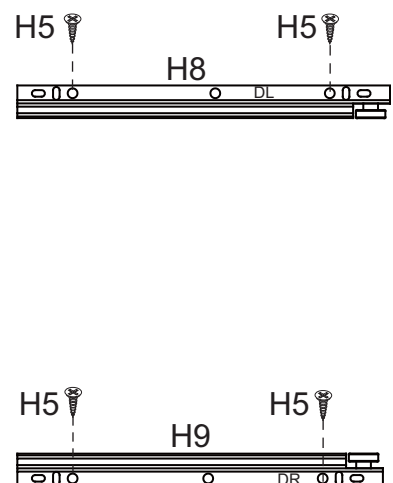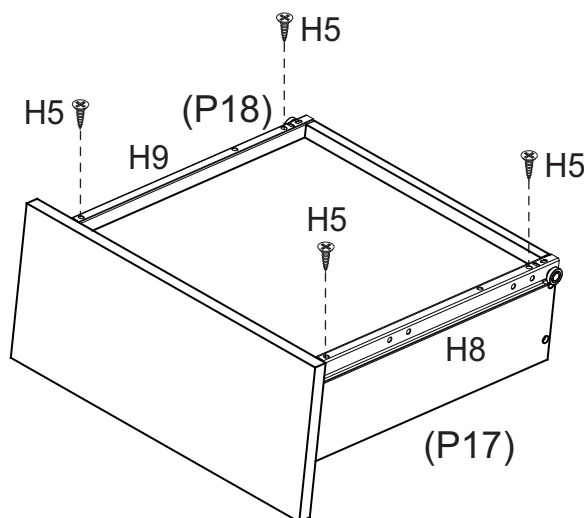

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P17) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P18) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


## Step 23

You will need	
	
1 x Handle (H13)	2 x Round Head Bolts (H14)
	
Phillips head screwdriver	

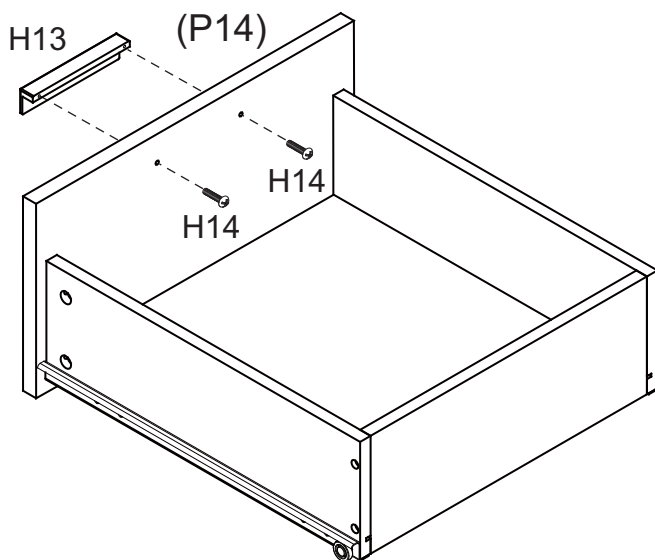



Attach 1 x Handle (H13) to Smaller Drawer Front (P14) with 2 x Round Head Bolts (H14). Tighten Round Head Bolts using a Phillips head screwdriver.

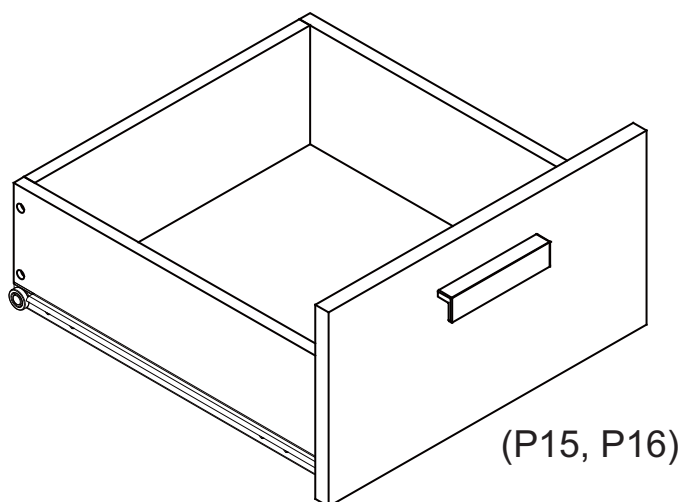
## Step 24



Repeat Step 18 to Step 23 with Smaller Drawer Fronts (P15, P16) to assemble the other 2 smaller drawers.



## Step 25

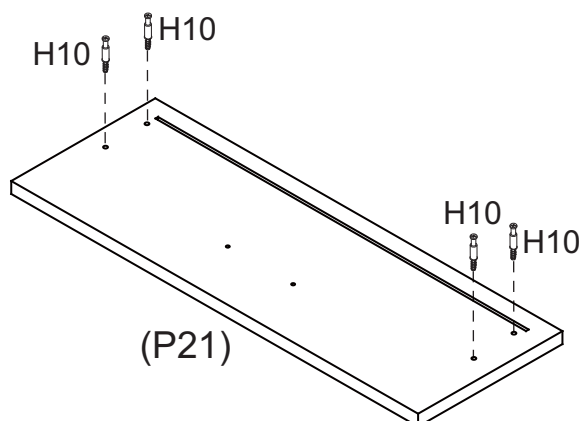
You will need	
	
4 x Small Cam Bolts (H10)	Phillips head screwdriver



Insert 4 x Small Cam Bolts (H10) into Larger Drawer Front (P21).


## Step 26

You will need	
	
4 x Small Cam Nuts (H11)	Flat head screwdriver

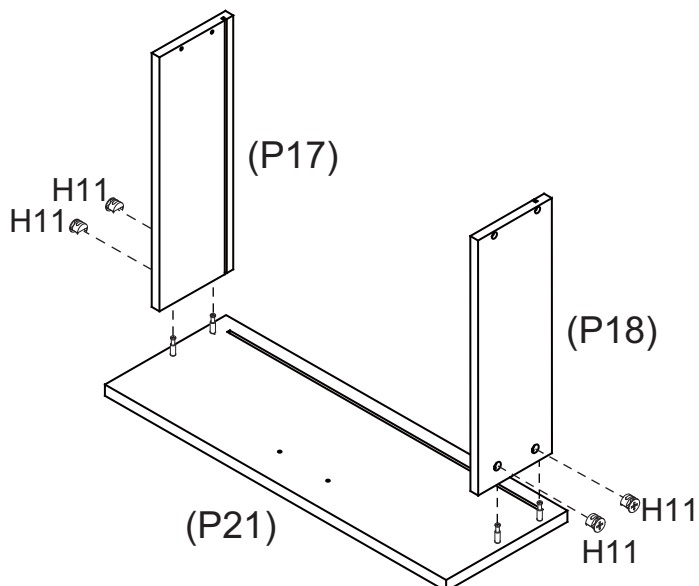



Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P17, P18). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Sides (P17, P18) with Larger Drawer Front (P21), and then tighten the cam nuts.

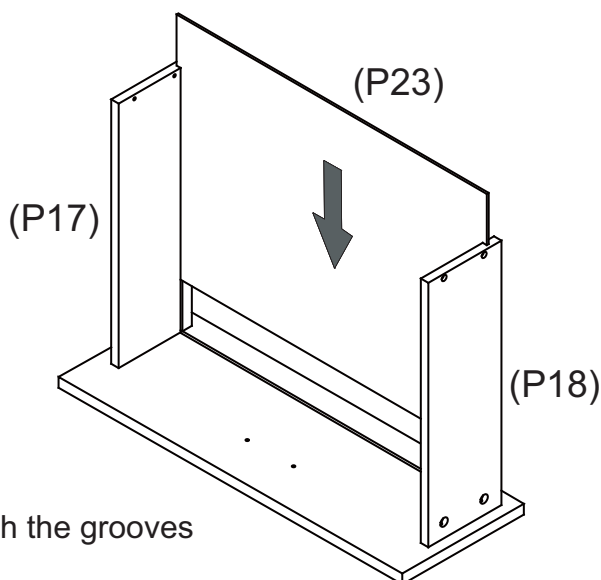
## Step 27



Slide Larger Drawer Base (P23) in through the grooves of Drawer Sides (P17, P18).

## Step 28


You will need	
	
4 x Long Screws (H12)	Phillips head screwdriver

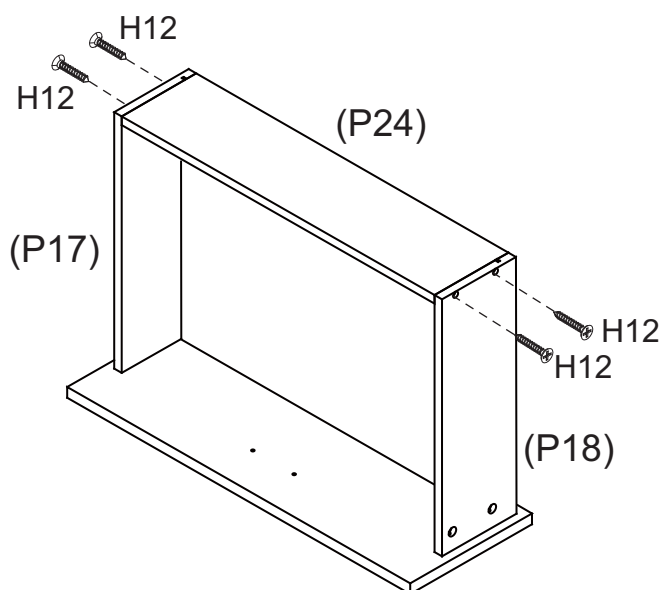

Attach Larger Drawer Back (P24) to Drawer Sides (P17, P18) with 4 x Long Screws (H12), make sure that the grooves line up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.

## Step 29


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips head screwdriver

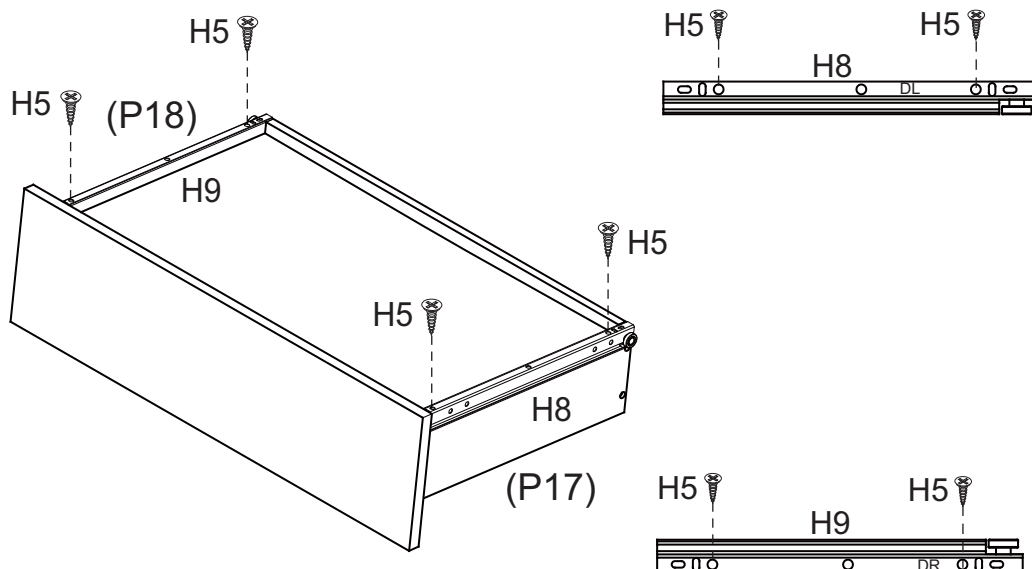

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P17) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P18) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


## Step 30

You will need	
1 x Handle (H13)	2 x Round Head Bolts (H14)
Phillips head screwdriver	

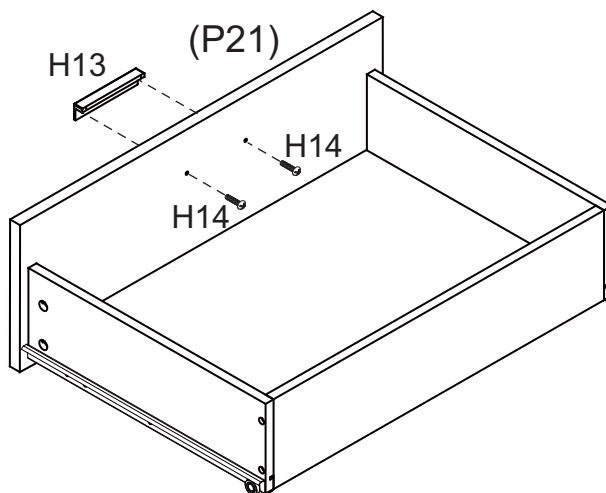


Attach 1 x Handle (H13) to Larger Drawer Front (P21) with 2 x Round Head Bolts (H14). Tighten Round Head Bolts using a Phillips head screwdriver.

## Step 31

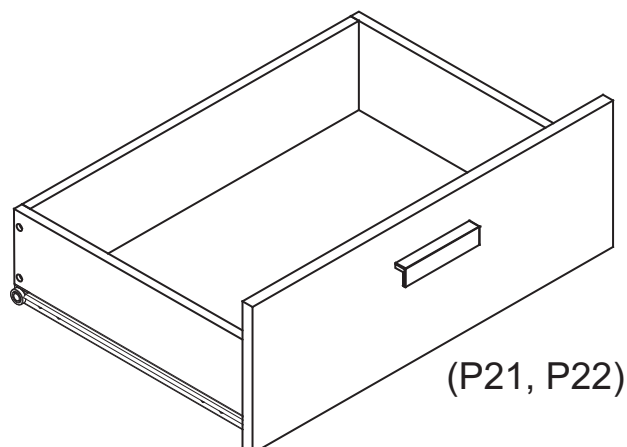

Repeat Step 25 to Step 30 with Larger Drawer Fronts (P21, P22) to assemble the other 3 larger drawers.

# Step 32

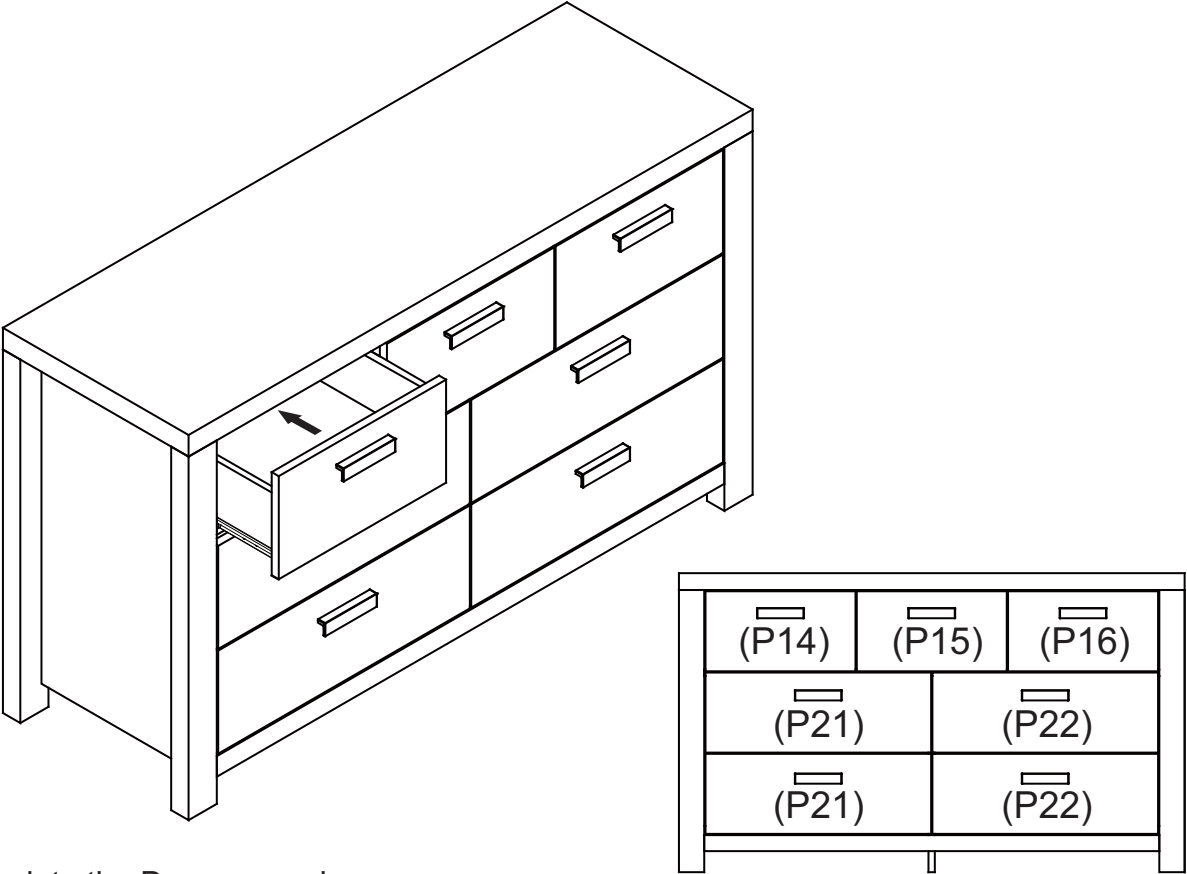


Slide 7 x drawers into the Dresser as shown.

# Step 33



We strongly advise that you use the wall safety strap provided to prevent the unit toppling

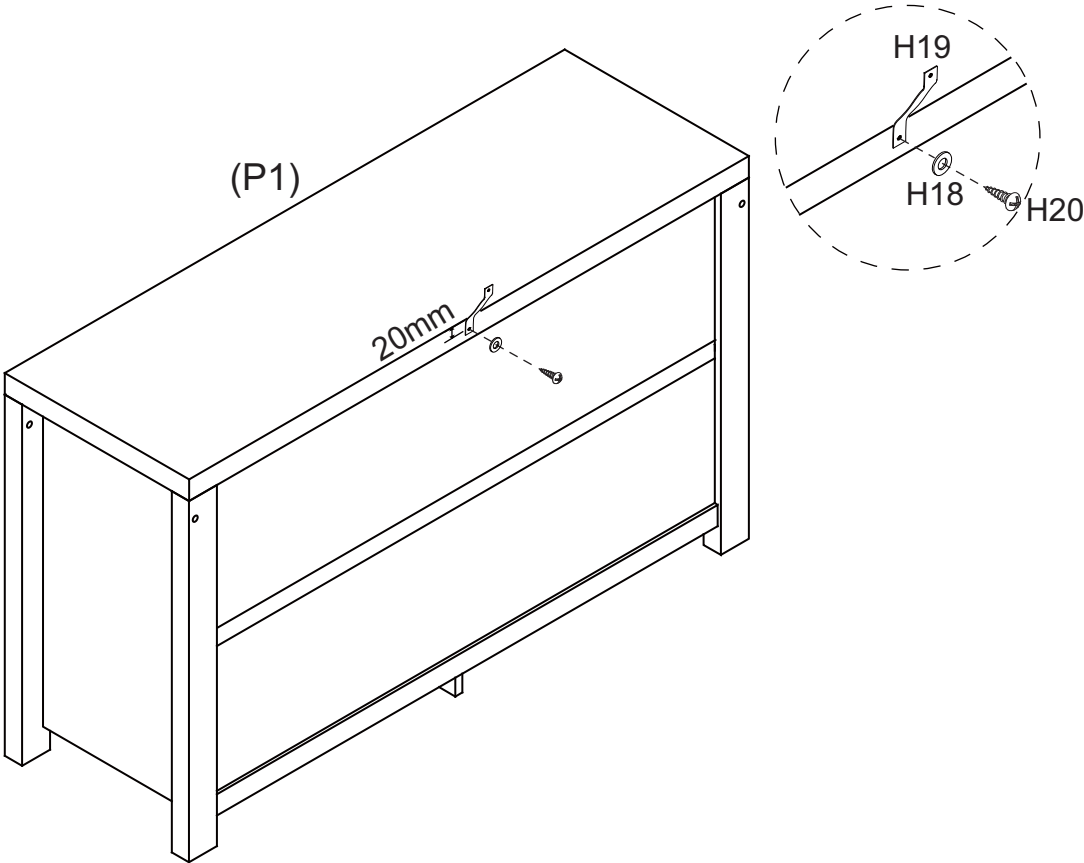You will need	
1 x Safety Strap (H19)	1 x Screw (H20)
1 x Washer (H18)	Phillips head screwdriver





Use Screw (H20) and Washer (H18) to attach Safety Strap (H19) securely on Top Panel (P1) as shown.


## Step 34

You will need	
	
1 x Washer (H18)	Phillips head screwdriver
Screw and Wall Plug which are not provided. Please use appropriate fixtures for your wall.	

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

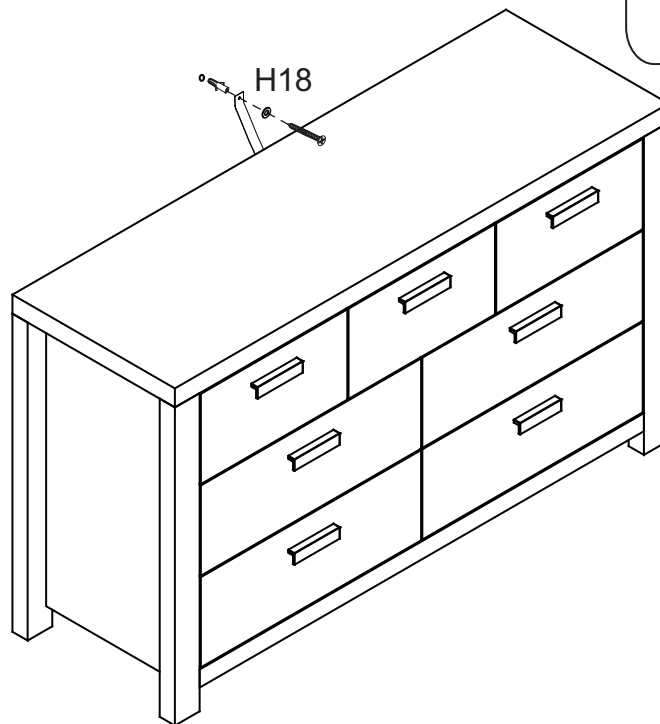

Move the dresser to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

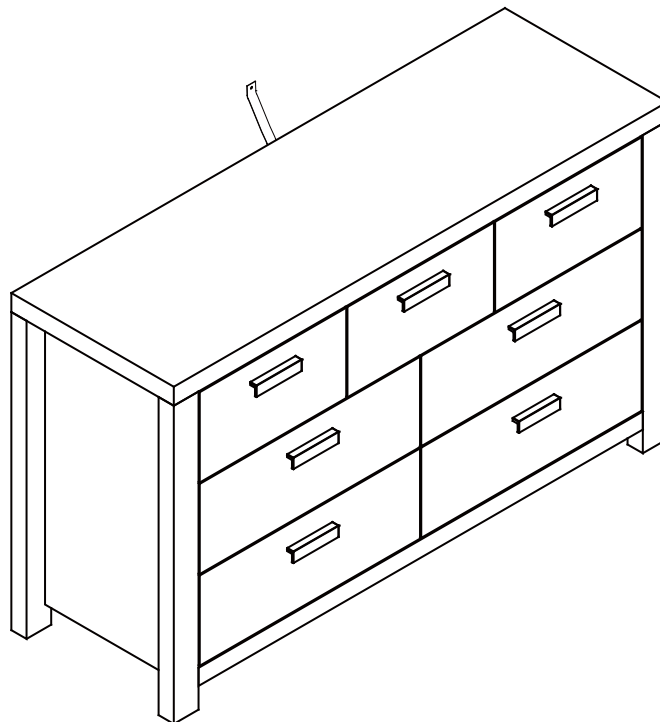

**Recommended weight capacity : 80KG.**

**Recommended weight capacity of drawer: 18KG/drawer.**


# Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.



**Fantastic  
Furniture**

Version 1.0

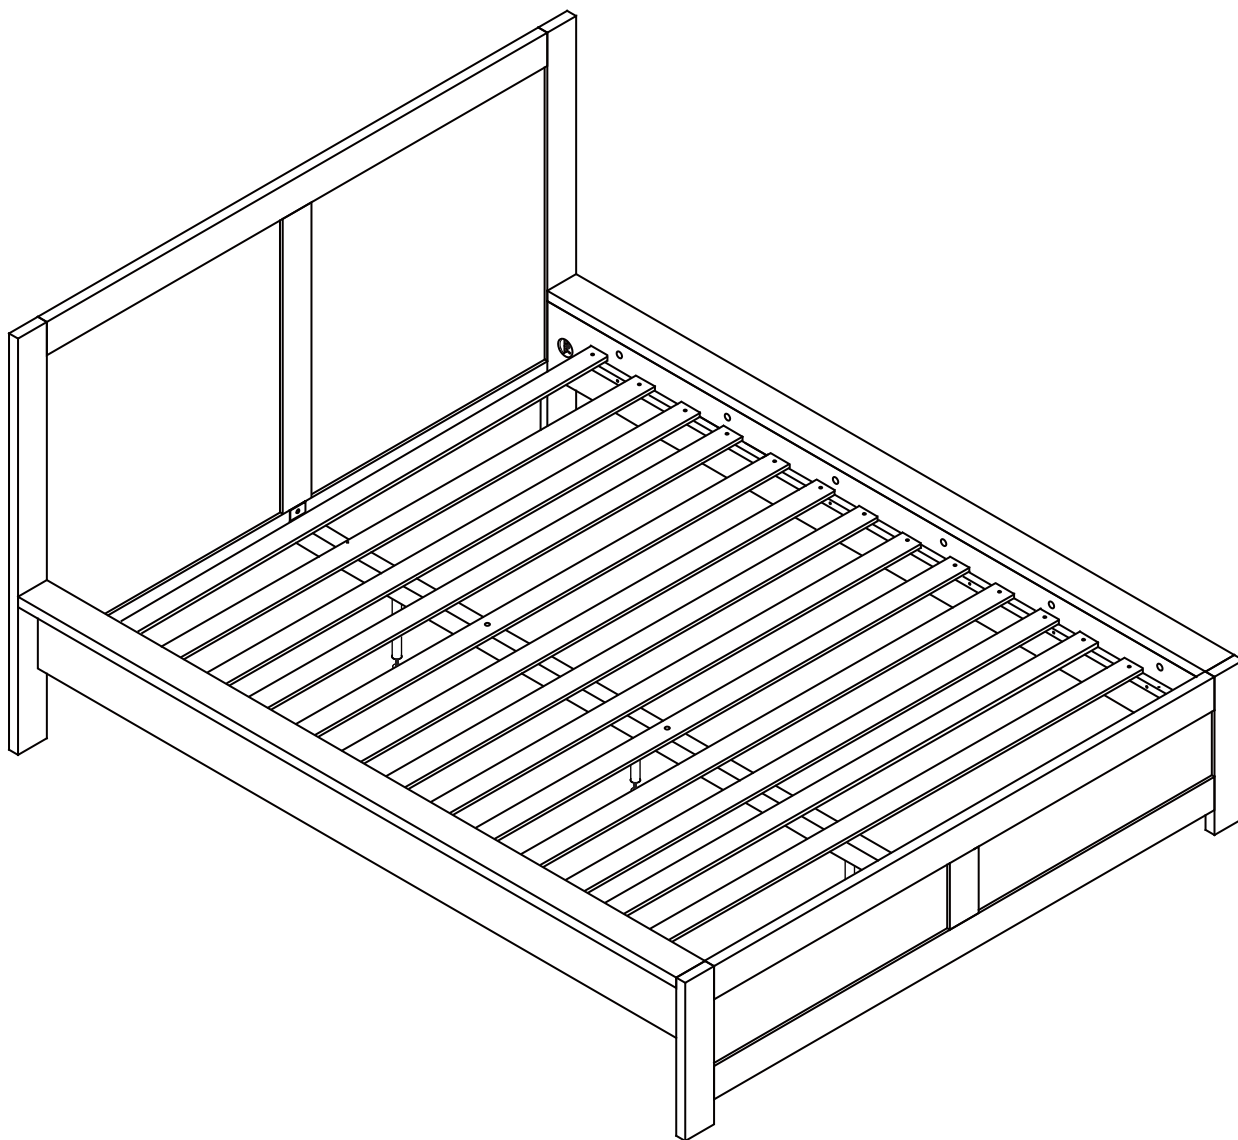

**Two People**



**Required**

**HAVANA**  
Bed King

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love



## Fantastic Furniture

### Love it? Share it!

Fantastic buy! Share how it looks at home for your  
chance to win a \$250 Fantastic Furniture Gift Card!


**fantasticfurniture**




# Assembly Checklist




Read through the instructions carefully before you begin.

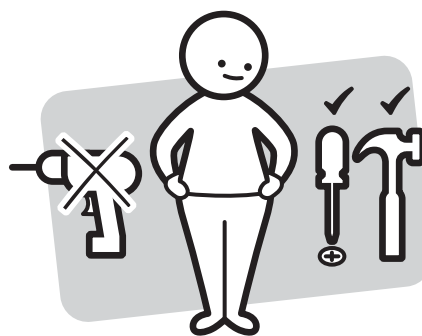

Make sure you have all the required tools. Never use power tools unless instructed.

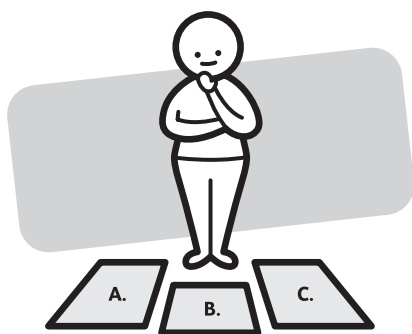

Identify and lay out all of the components before you begin assembly.

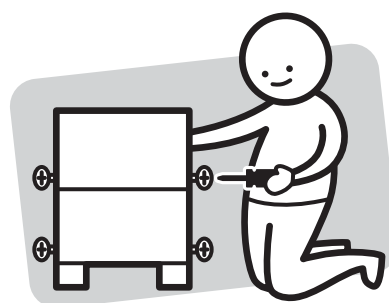

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need


## to assemble the product



DO NOT USE



**Other tools you need:**  
Phillips head screwdriver;  
Hammer

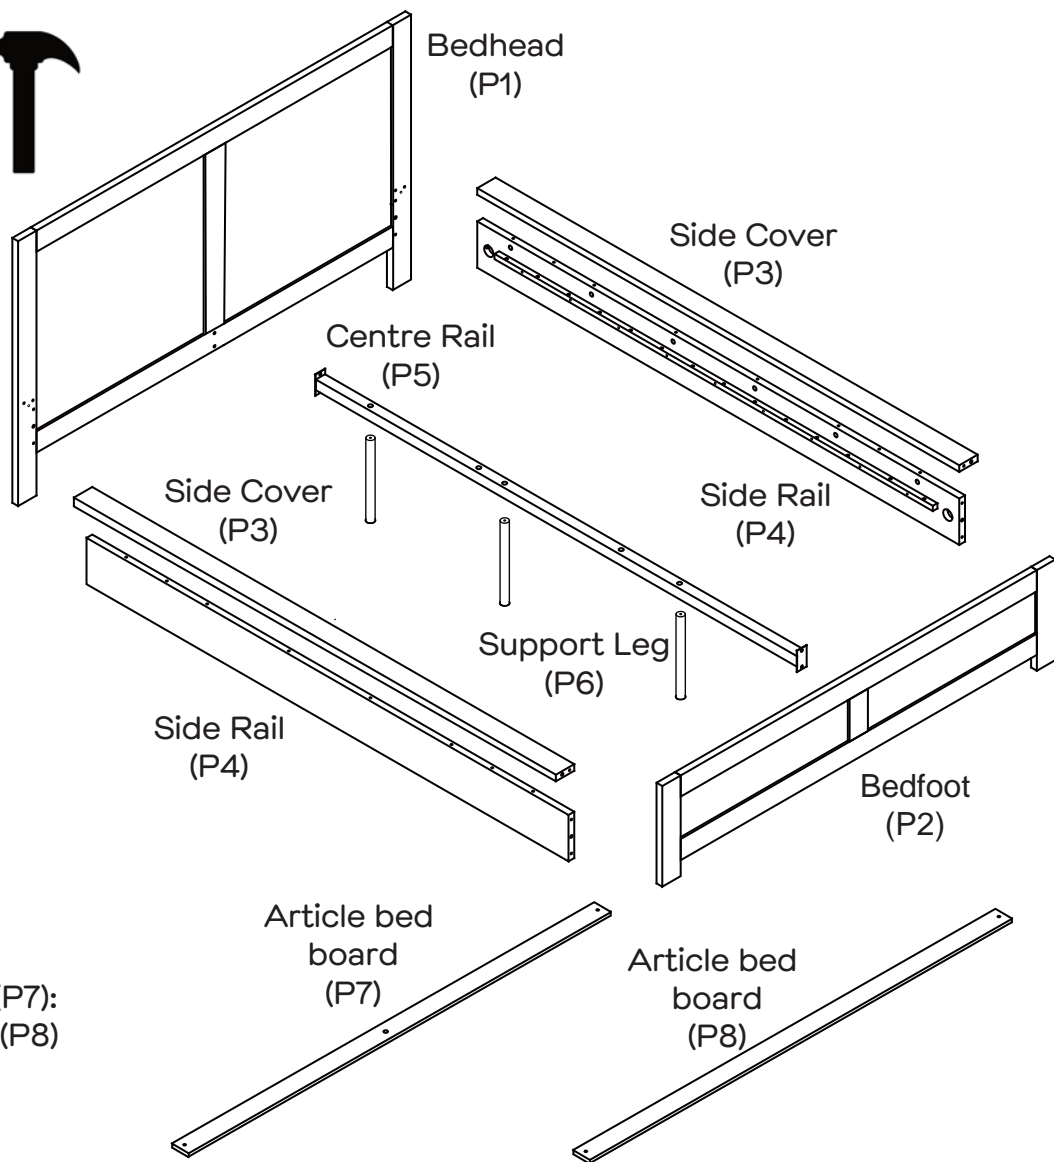

### Parts list

Bedhead (P1);  
Bedfoot (P2);  
2 x Side Covers (P3);  
2 x Side Rails (P4);  
Centre Rail (P5);  
3 x Support Legs (P6);  
2 x Article bed boards (P7);  
11 x Article bed boards (P8)


### Hardware pack



20 x Dowels  
(H1)



26 x Screws  
(H2)




12 x Cam Bolts  
(H3)



12 x Cam Nuts  
(H4)



4 x Half Round  
Nuts  
(H5)



4 x Threaded Rod  
(H6)




4 x Hexagonal  
Nuts  
(H7)



1 x Spanner  
(H8)



4 x Plastic  
Glides  
(H9)



5 x Long Bolts  
(H10)



1 x Allen Key  
(H11)



4 x Brackets  
(H12)



8 x Bolts  
(H13)



8 x Washers  
(H14)



2 x Hexagonal  
Nuts  
(H15)



3 x Adjustable  
(H16)








4 x Washers  
(H17)



4 x Screws  
(H18)





## Step 1

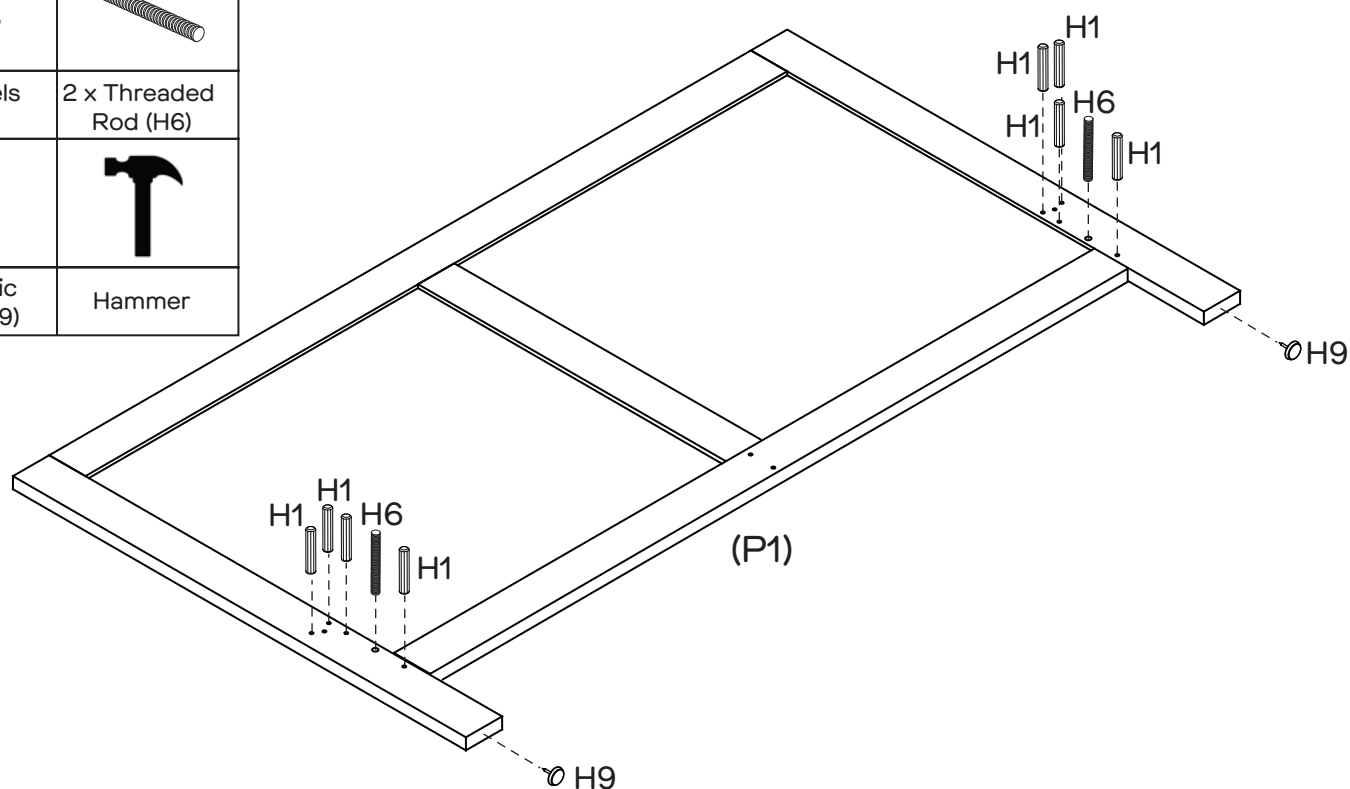
You will need	
	
8 x Dowels (H1)	2 x Threaded Rod (H6)
	
2 x Plastic Glides (H9)	Hammer



Insert 8 x Dowels (H1) into Bedhead (P1). Attach 2 x Threaded Rod (H6) into Bedhead (P1). Hammer 2 x Plastic Glides (H9) onto the bottom of Bedhead (P1).




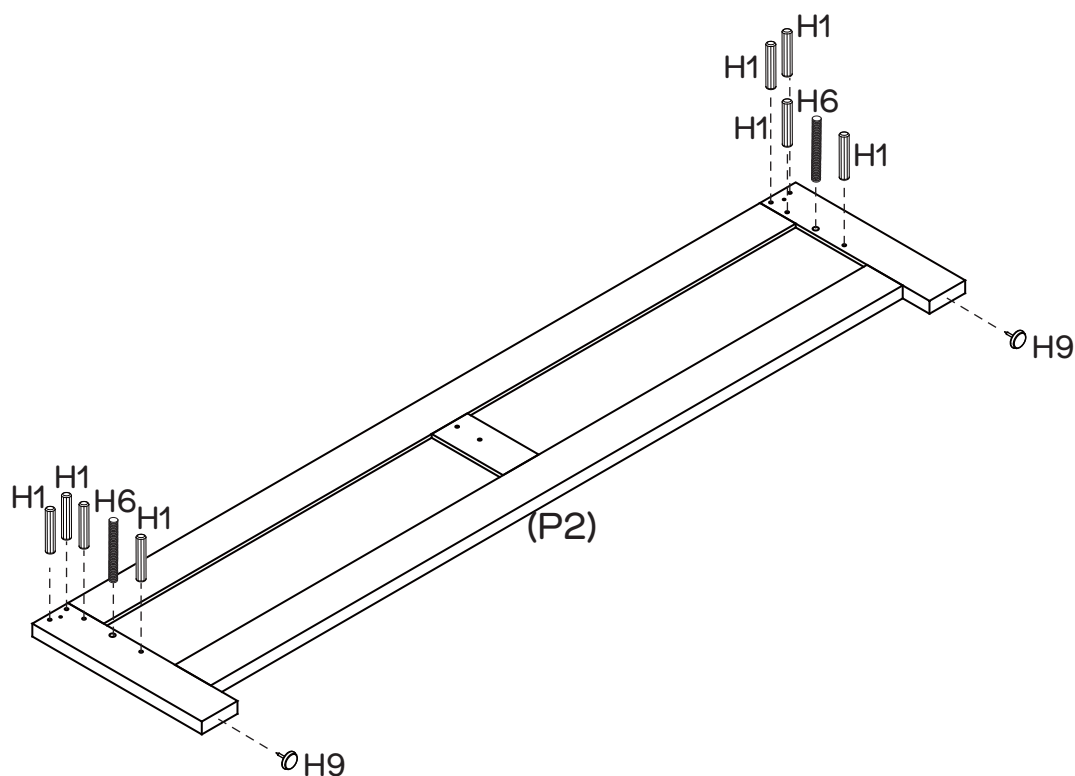


## Step 2


You will need	
	
8 x Dowels (H1)	2 x Threaded Rod (H6)
	
2 x Plastic Glides (H9)	Hammer



Insert 8 x Dowels (H1) into Bedfoot (P2).  
Attach 2 x Threaded Rod (H6) into Bedfoot (P2).  
Hammer 2 x Plastic Glides (H9) onto the bottom of Bedfoot (P2).

## Step 3

You will need	
	
6 x Cam Bolts (H3)	2 x Brackets (H12)
	
2 x Bolts (H13)	2 x Washers (H14)
	
1 x Allen Key (H11)	Phillips head screwdriver

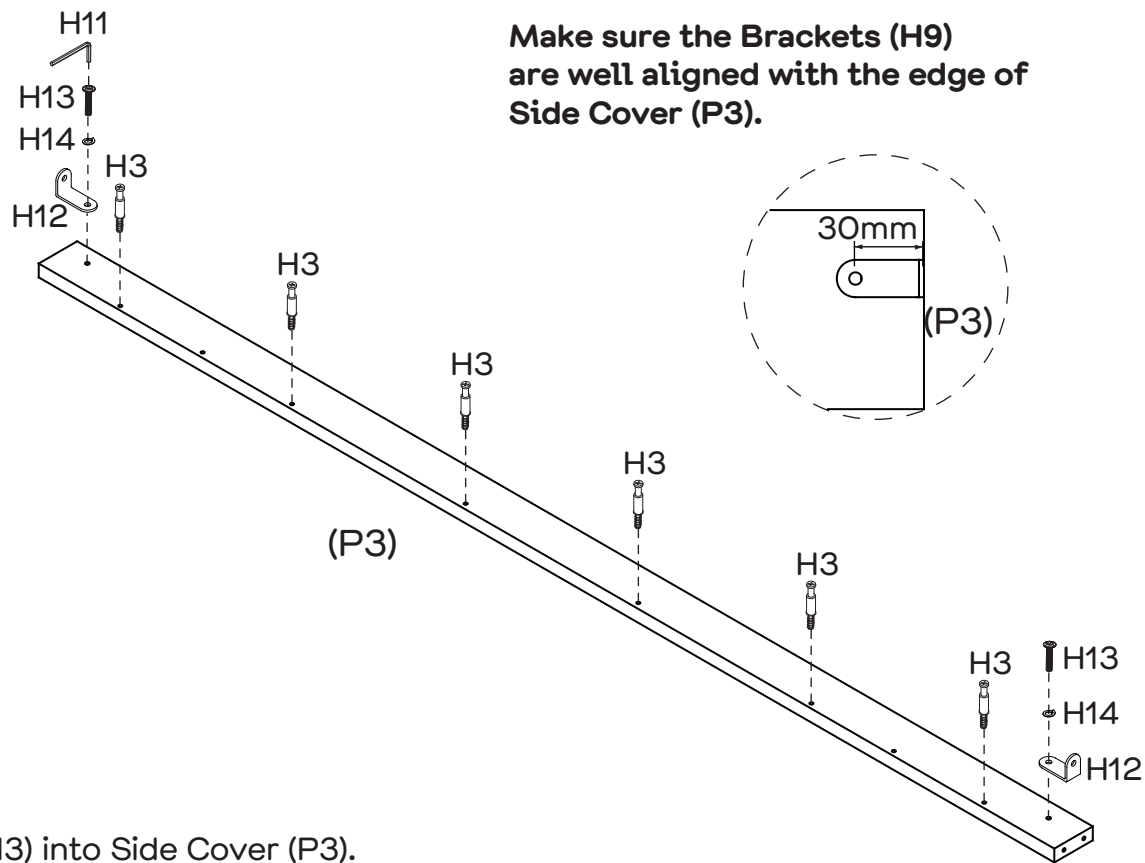




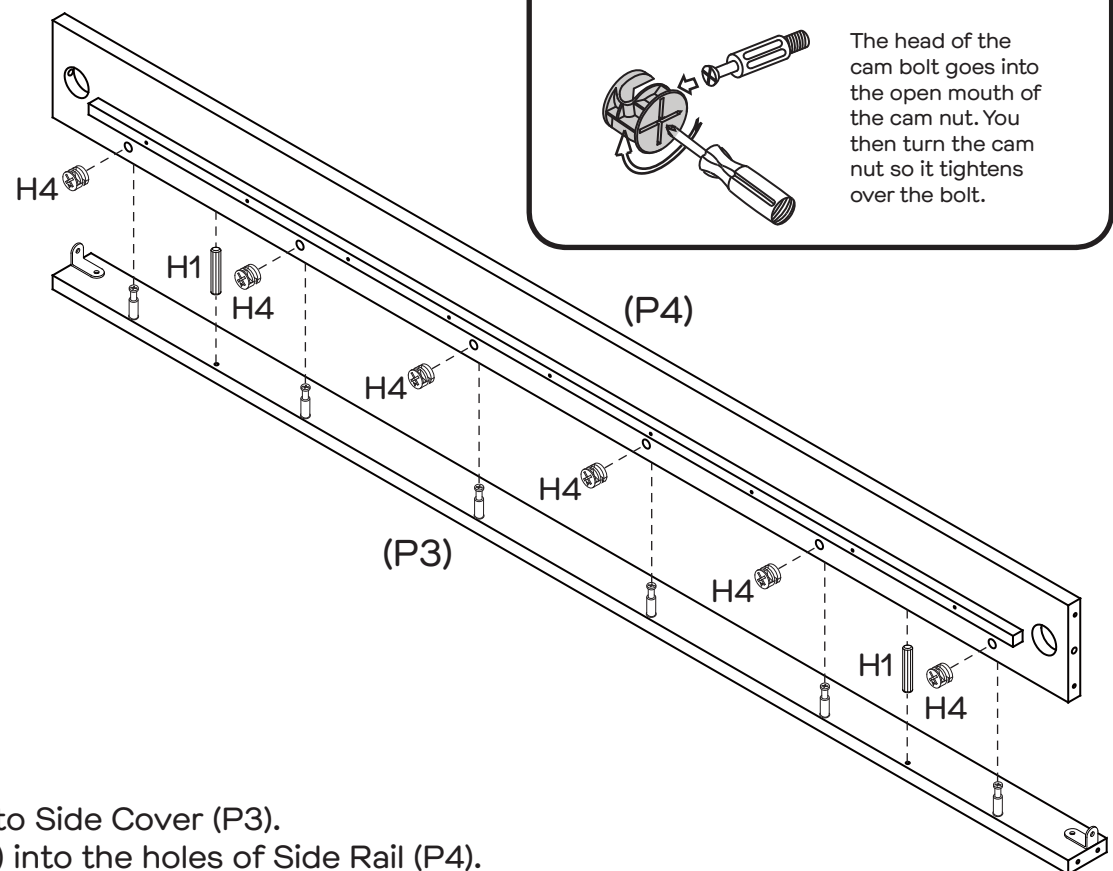
Make sure the Brackets (H9) are well aligned with the edge of Side Cover (P3).

Attach 6 x Cam Bolts (H3) into Side Cover (P3).


Attach 2 x Brackets (H12) to Side Cover (P3) with 2 x Bolts (H13) and 2 x Washers (H14) using an Allen Key (H11). Do not fully tighten the bolts until Step 6.

## Step 4

You will need	
	
6 x Cam Nuts (H4)	2 x Dowels (H1)
	
Phillips head screwdriver	



This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 2 x Dowels (H1) into Side Cover (P3).

Insert 6 x Cam Nuts (H4) into the holes of Side Rail (P4).







Rotate the cam nuts so the arrows point towards the incoming cam bolts.


Attach Side Rail (P4) to Side Cover (P3),

then tighten the cam nuts with the Phillips Head Screwdriver.

Repeat Step 3 to Step 4 for the other Side Cover (P3) and Side Rail (P4).





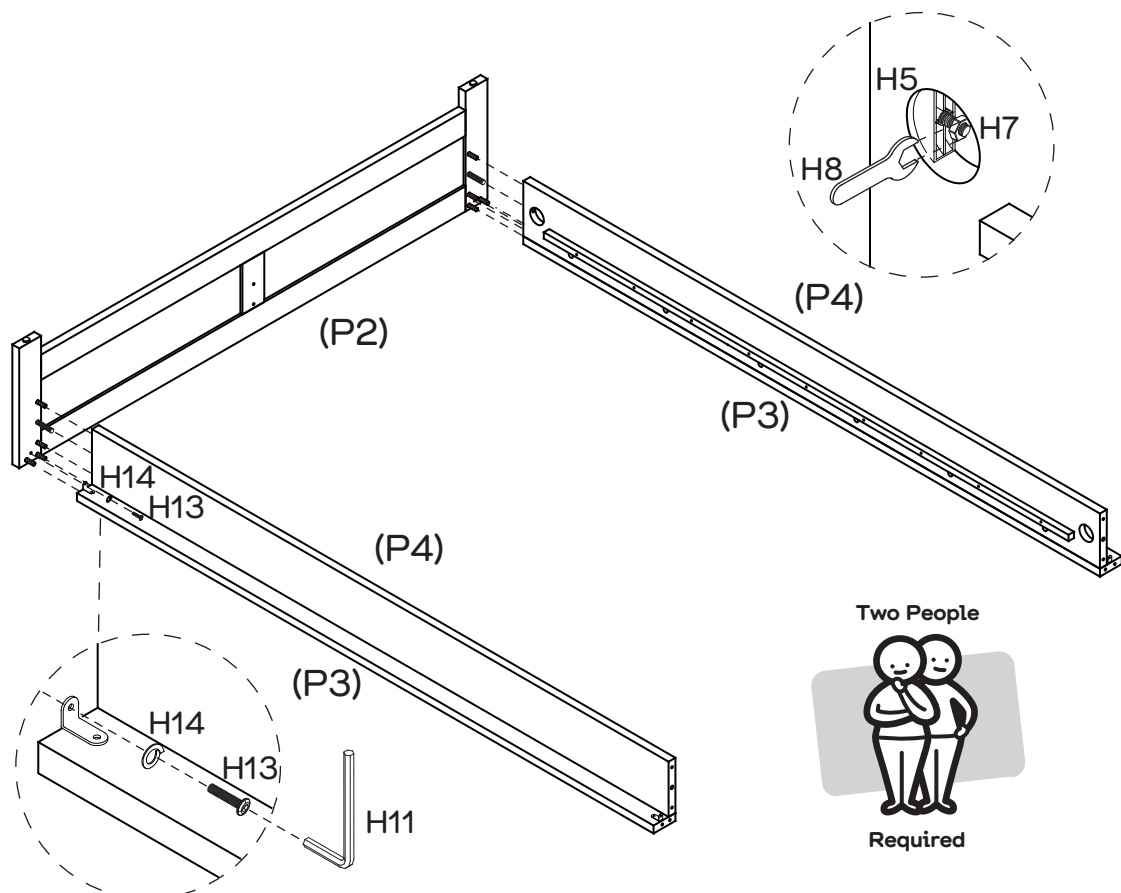

## Step 5


You will need	
	
2 x Half Round Nuts (H5)	2 x Hexagonal Nuts (H7)
	
1 x Spanner (H8)	2 x Bolts (H13)
	
2 x Washers (H14)	1 x Allen Key (H11)



Attach Bedfoot (P2) to Side Covers (P3) and Side Rails (P4) with 2 x Half Round Nuts (H5), and 2 x Hexagonal Nuts (H7) using a Spanner (H8). Connect the brackets to Bedfoot (P2) with 2 x Bolts (H13) and 2 x Washers (H14) using an Allen Key (H11). Do not fully tighten the bolts until Step 6.




## Step 6

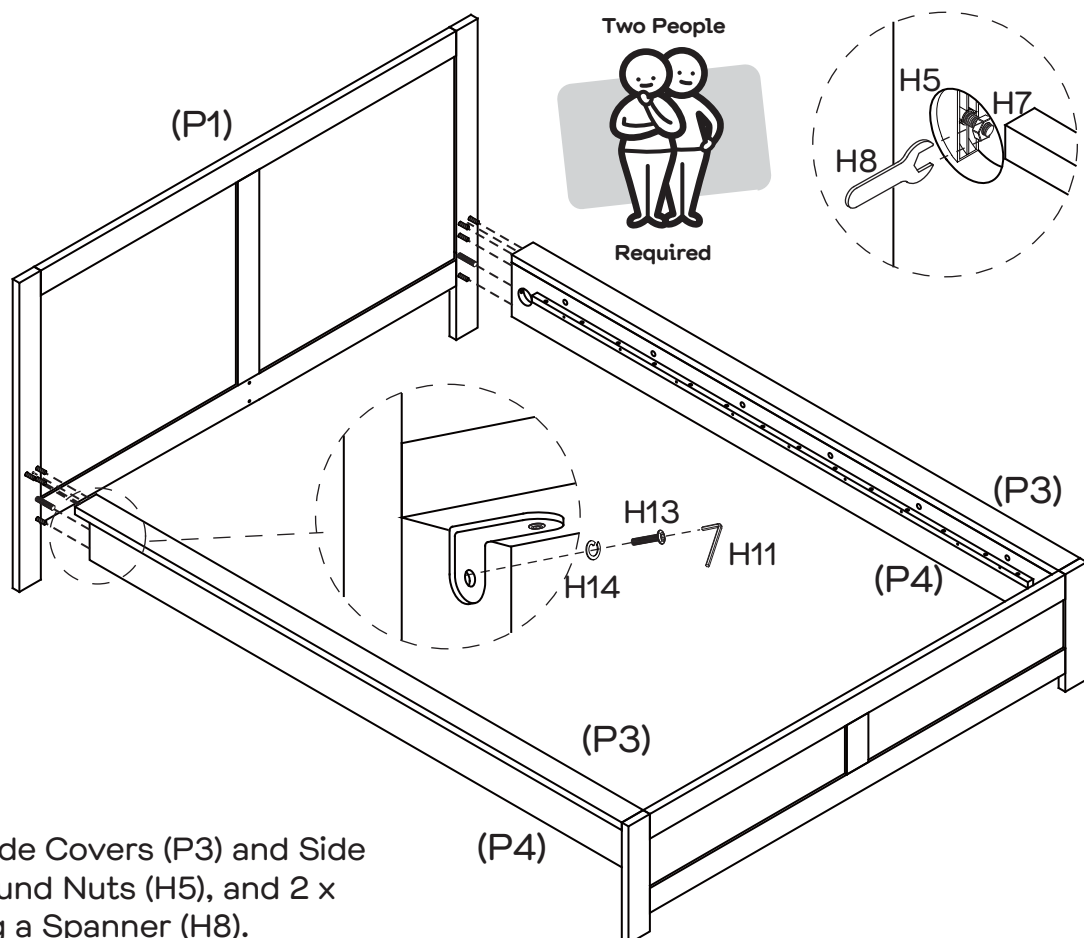
You will need	
	
2 x Half Round Nuts (H5)	2 x Hexagonal Nuts (H7)
	
1 x Spanner (H8)	2 x Bolts (H13)
	
2 x Washers (H14)	1 x Allen Key (H11)



Attach Bedhead (P1) to Side Covers (P3) and Side Rails (P4) with 2 x Half Round Nuts (H5), and 2 x Hexagonal Nuts (H7) using a Spanner (H8). Connect the brackets to Bedhead (P1) with 2 x Bolts (H13) and 2 x Washers (H14) using an Allen Key (H11). Fully tighten all Bolts (H13) on 4 x Brackets (H9).



## Step 7


You will need	
	
3 x Long Bolts (H10)	1 x Allen Key (H11)
	
3 x Adjustable (H16)	

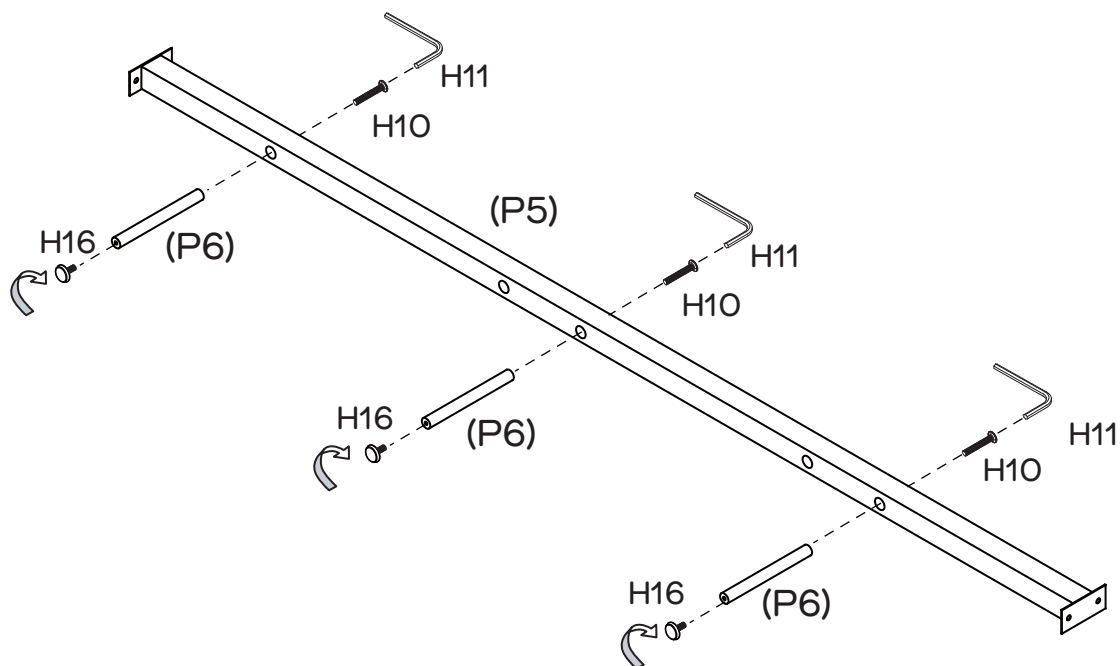

Attach 3 x Support Legs (P6) to Centre Rail (P5) with 3 x Long Bolts (H10) using Allen Key (H11). Insert the 3 x Adjustable (H16) into the Support Legs (P6) .

## Step 8




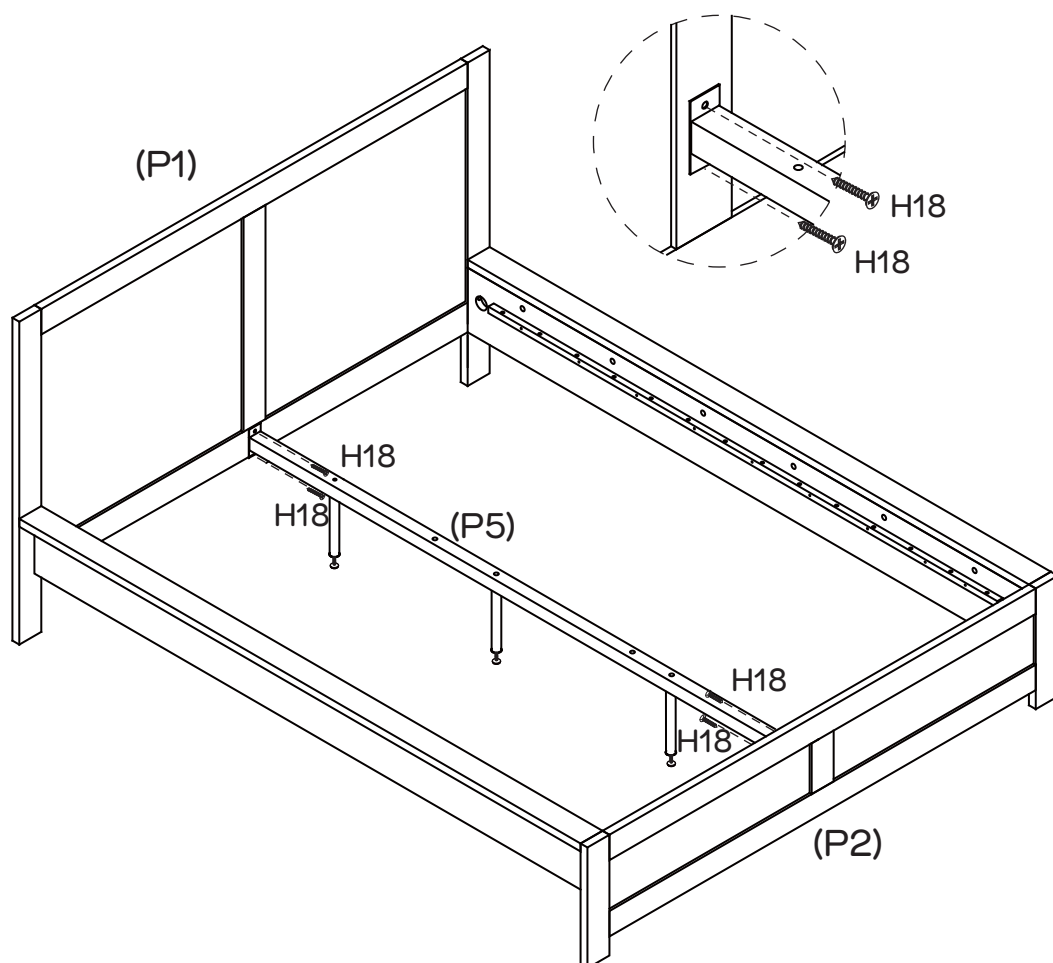


You will need	
	
4 x Screws (H18)	Phillips head screwdriver




Attach Centre Rail (P5) to Bedhead (P1) and Bedfoot (P2) screw with 4 x Screws (H18). Tighten with a Phillips Head Screwdriver.





## Step 9


You will need	
	
4 x Screws (H2)	2 x Long Bolts (H10)
	
2 x Hexagonal Nuts (H15)	4 x Washers (H17)
	
1 x Allen Key (H11)	Phillips head screwdriver

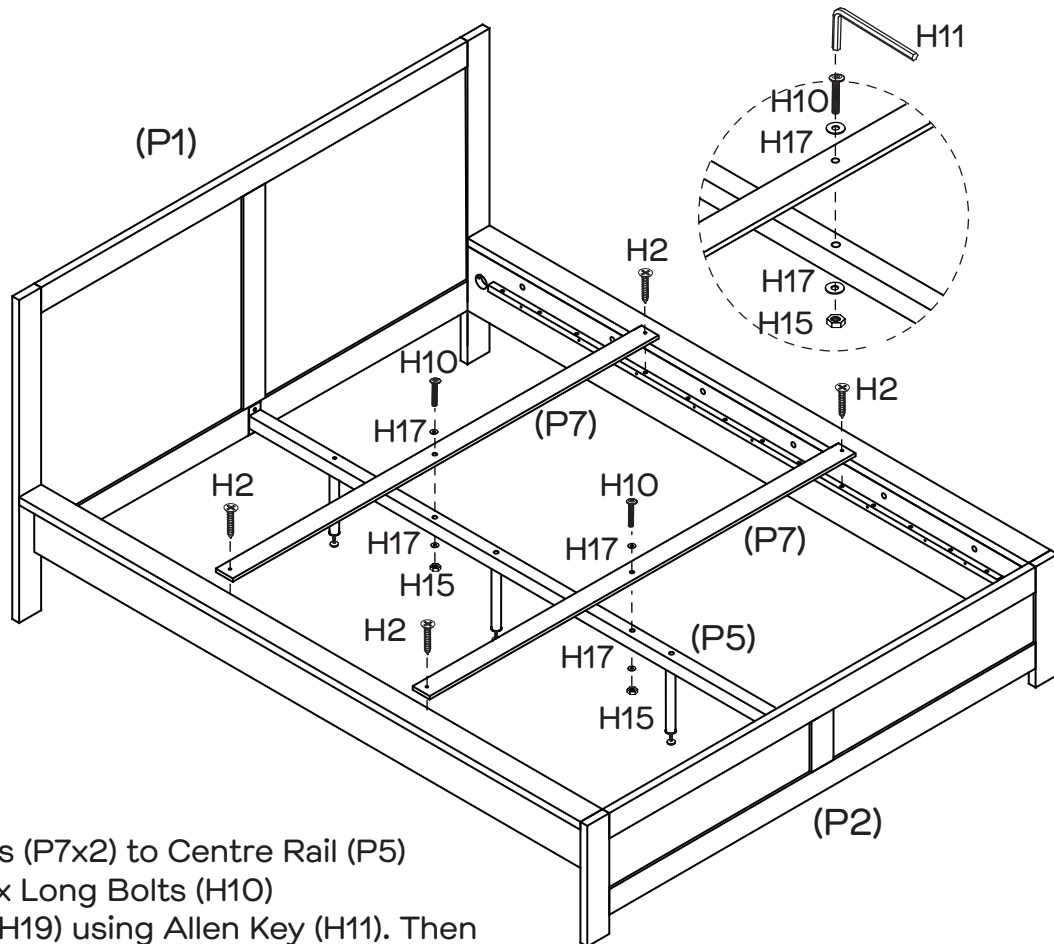


Attach Article bed boards (P7x2) to Centre Rail (P5) with 4 x Washers (H17), 2 x Long Bolts (H10) and 2 x Hexagonal Nuts (H15) using Allen Key (H11). Then screw Article bed boards (P7x2) with 4 x Screws (H2). Move the bed to the proper position after folding and adjusting the foot 5mm. After reaching the proper position, rotate the adjusting foot to the ground level.

## Step 10

You will need	
	
22 x Screws (H2)	Phillips head screwdriver

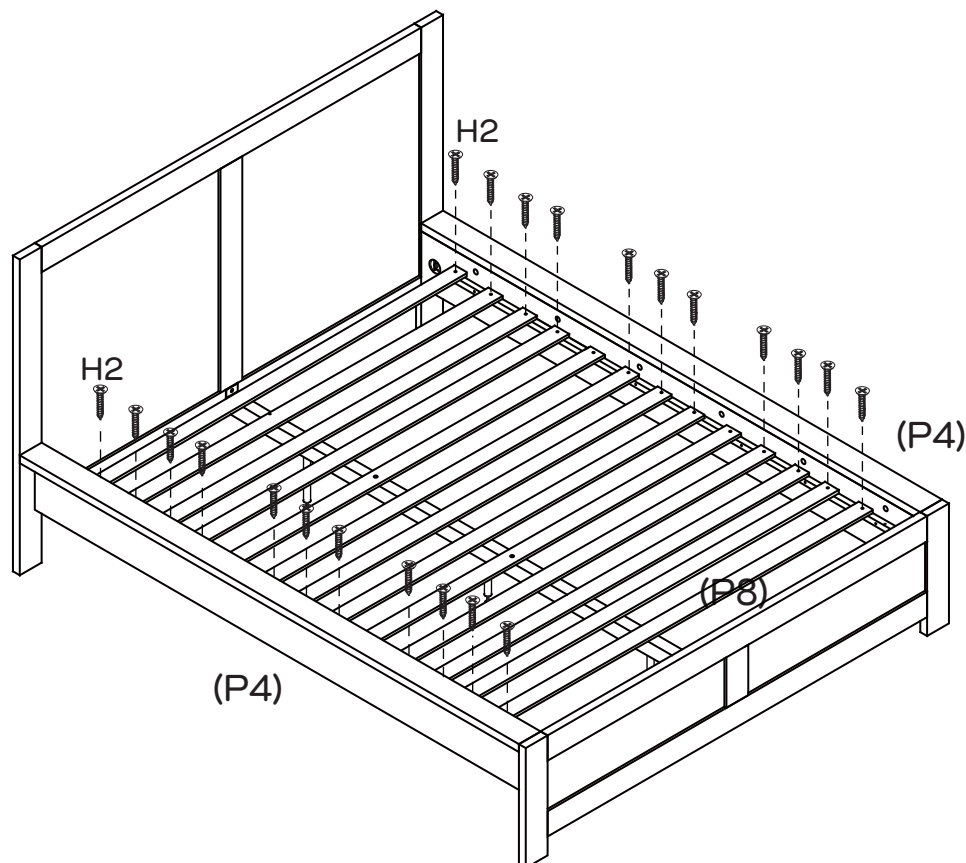

Attach Article bed boards (P8x11) to Side Rails (P4) with 22 x Screws (H2). Tighten with a Phillips head screwdriver.

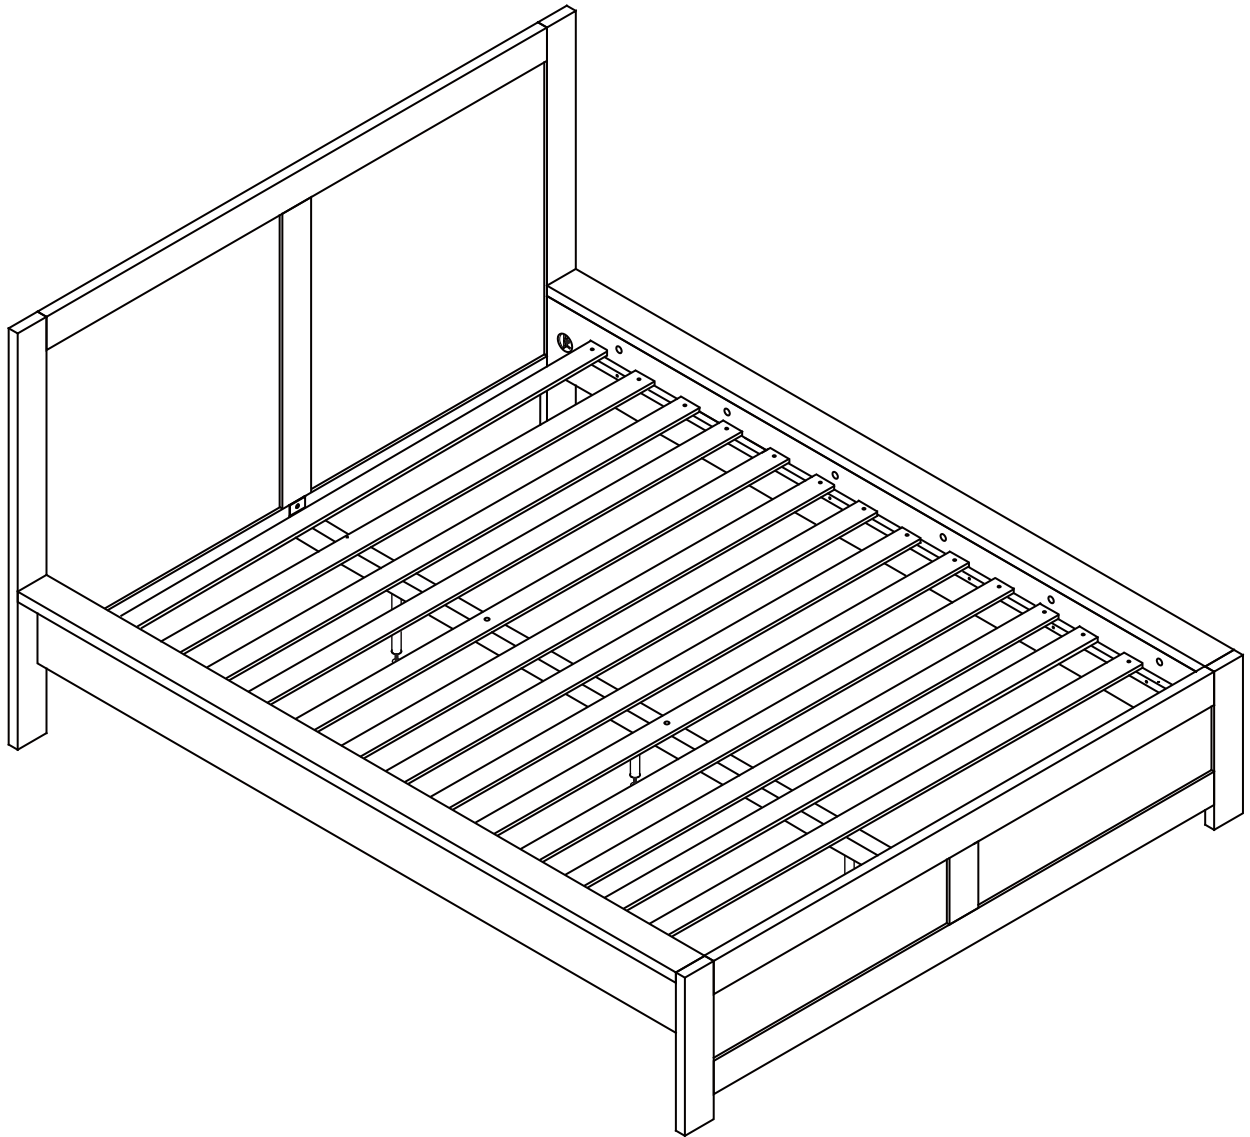

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.