





# Warning: Ensure the wall strap is attached to avoid serious injury.

To avoid any serious of fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



## Fantastic Furniture

#### Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!


@fantasticfurniture




#### **Assembly Checklist**




Read through instructions carefully before you begin



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless Instructed, do not fully tighten screws until the item is fully assembled.


#### **Useful Information**

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistake made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

#### What you need

#### to assemble the product



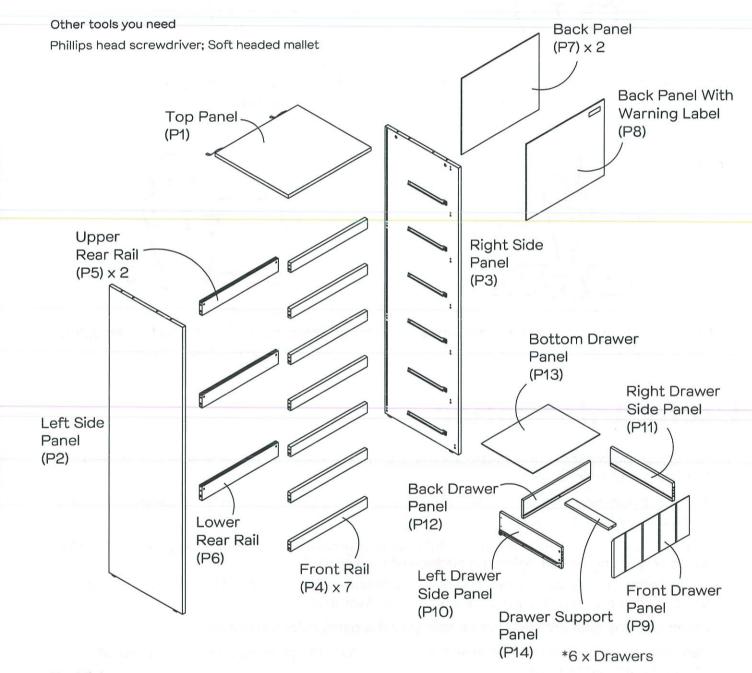



#### Part list

Table Top (P1), Left Side Panel (P2), Right Side Panel (P3), Front Rails (P4), Upper Rear Rails (P5), Lower Rear Rail (P6), Back Panels (P7), Back Panel With Warning Label (P8), Front Drawer Panels (P9), Left Drawer Side Panels (P10), Right Drawer Side Panels (P11), Back Drawer Panels (P12), Bottom Drawer Panels (P13), Drawer Support panels (P14), Hardware Pack.




#### Hardware pack

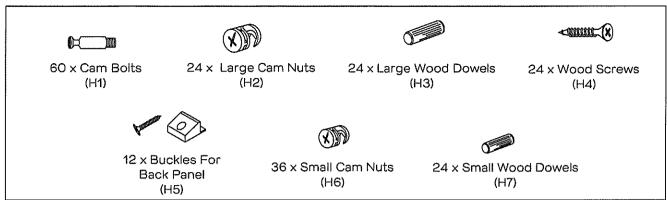

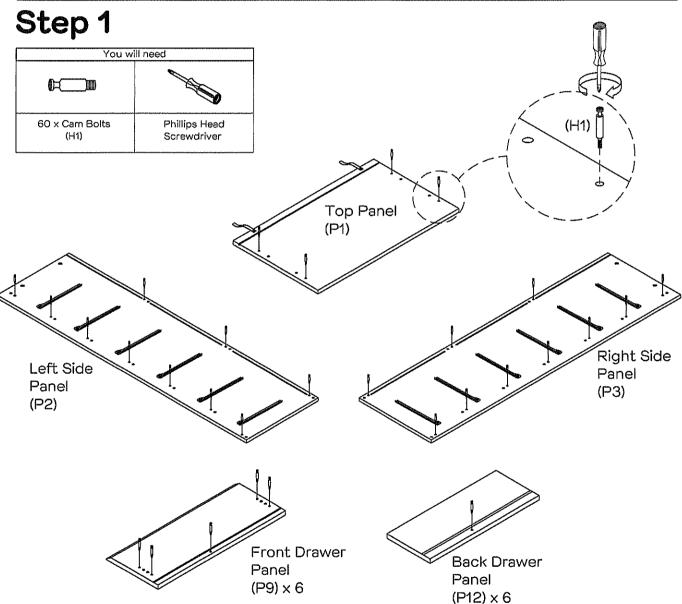


Insert 60 x cam bolts (H1) into the panels as shown, tighten with a phillips head screwdriver.



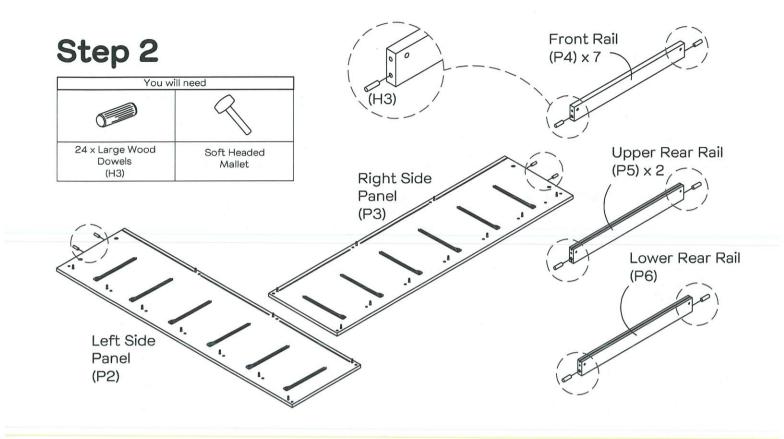

Insert 24 x large wood dowels (H3) to the rails & panels as shown by hand or gently using a soft headed mallet.

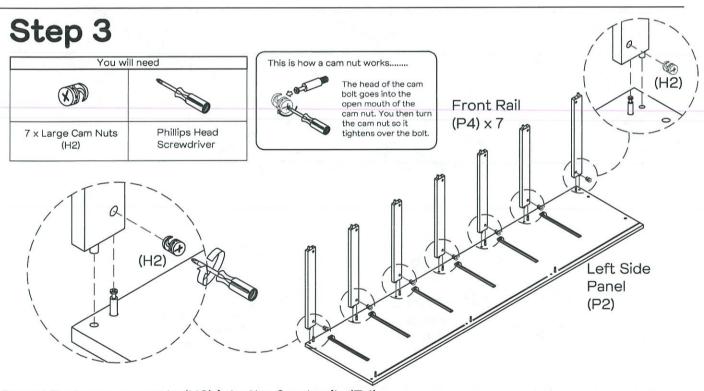


Insert 7 x large cam nuts (H2) into the front rails (P4).

Rotate the cam nuts (H2) so the arrows point towards the incoming cam bolts. Attach the  $7 \times 10^{-2}$  front rails (P4) to the left side panel (P2).

Turn the cam nuts (H2) on the front rails (P4) clockwise with a phillips head screwdriver to lock into position.




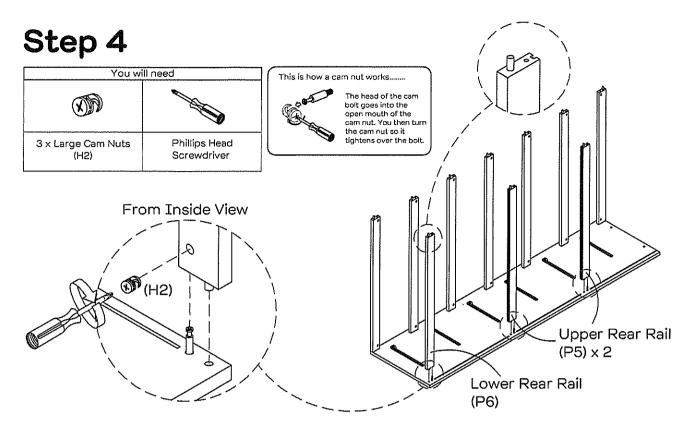

Insert 3 x large cam nuts (H2) into the rails (P5 & P6).


Rotate the cam nuts (H2) so the arrows point towards the incoming cam bolts. Attach rails (P5 & P6) to the left side panel (P2).

Turn the cam nuts (H2) on the rails (P5 & P6) clockwise with a phillips head screwdriver to lock into position.

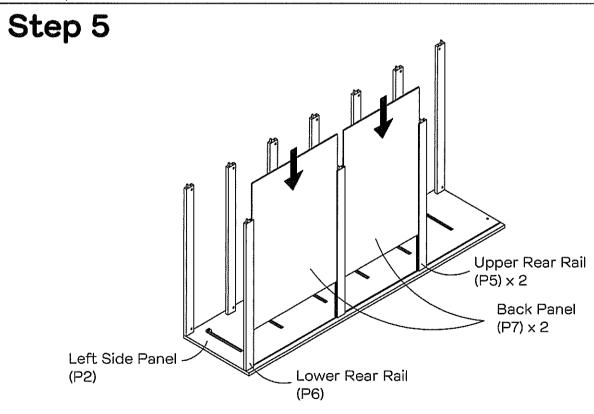

Slot in 2 x back panels (P7) into the grooves of the panels (P5, P6 & P2).



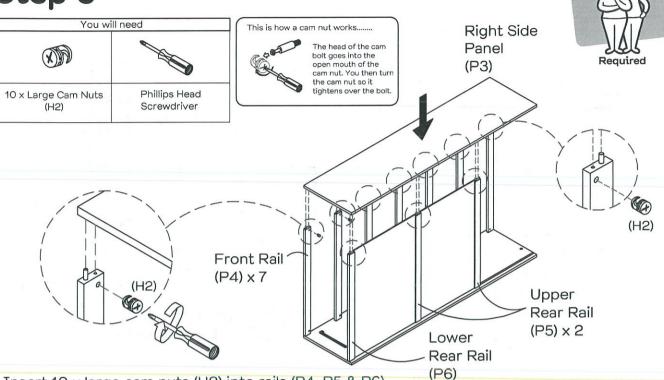


Insert 10 x large cam nuts (H2) into rails (P4, P5 & P6).

Rotate the cam nuts (H2) so the arrows point towards the incoming cam bolts.

Attach the right side panel (P3) to rails (P4, P5 & P6).

Turn the cam nuts (H2) on rails (P4, P5 & P6) clockwise with a phillips head screwdriver to lock into position.




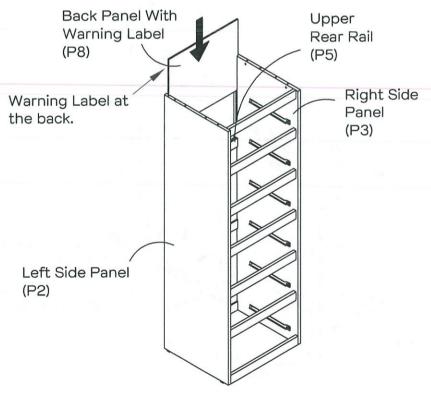


Slot in the back panel (P8) into the grooves of panels (P2, P3 & P5). The warning label should be facing the back.



Two People




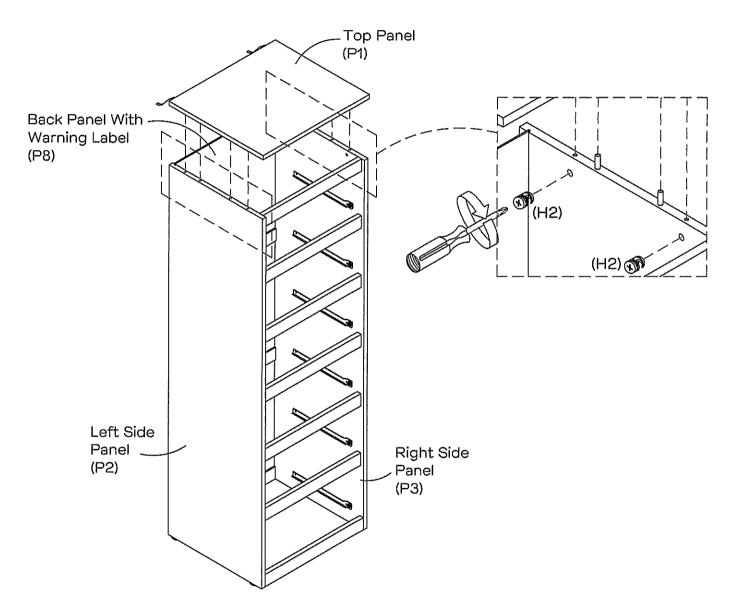

Insert 4 x large cam nuts (H2) into the left & right side panels (P2 & P3). Rotate the cam nuts (H2) so the arrows point towards the incoming cam bolts. Attach the top panel (P1) to panels (P2, P3 & P8).


Turn the cam nuts (H2) on panels (P2 & P3) clockwise with a phillips head screwdriver to lock into position.



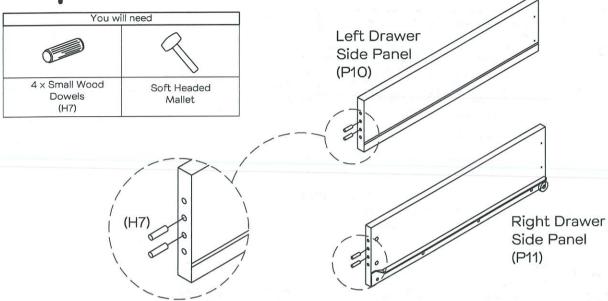


Insert 4 x small wood dowels (H7) to the left & right drawer side panels (P10 & P11) as shown by hand or gently using a soft headed mallet.

#### Step 10

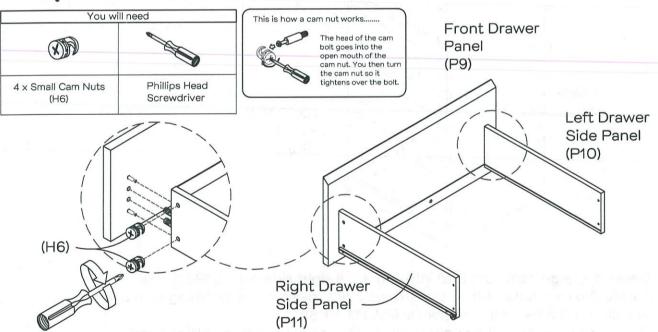


Insert 4 x small cam nuts (H6) into the left & right drawer side panels (P10 & P11). Rotate the cam nuts (H6) so the arrows point towards the incoming cam bolts. Attach the front drawer panel (P9) to the left & right drawer side panels (P10 & P11). Turn the cam nuts (H6) on panels (P10 & P11) clockwise with a phillips head screwdriver to lock into position.

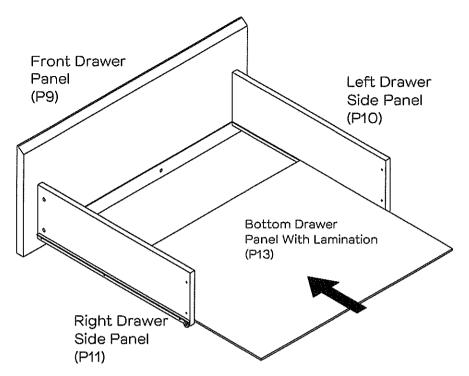


Slot in bottom drawer panel (P13) into the grooves of the left & right drawer side panels (P10 & P11) and also to the front drawer panel (P9).

#### Step 12

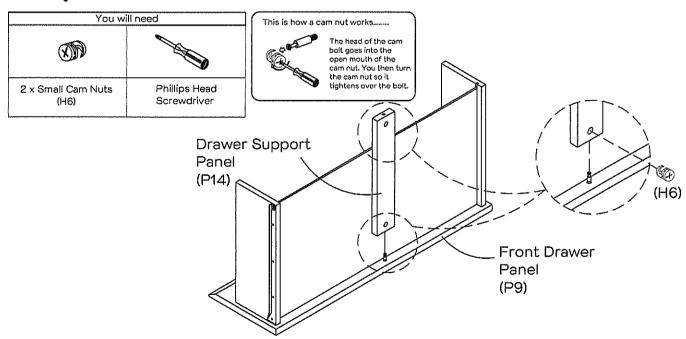


Insert 2 x small cam nuts (H6) into the drawer support panel (P14). Rotate the cam nuts (H6) so the arrow point towards the incoming cam bolts. Attach the drawer support panel (P14) to the front drawer panel (P9). Turn the bottom cam nut (H6) on drawer support panel (P14) clockwise with a phillips head screwdriver to lock into position.



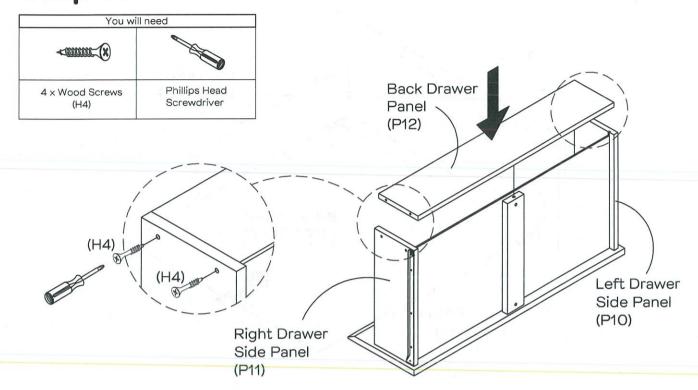


Fix the back drawer panel (P12) to the left & right drawer side panels (P10 & P11) using 4 x wood screws (H4) tightening with a phillips head screwdriver.

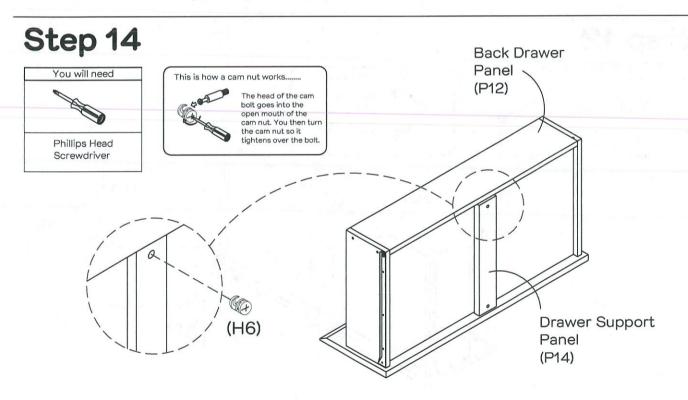


Attach the back drawer panel (P12) to the drawer support panel (P14). Turn the top cam nut (H6) on drawer support panel (P14) clockwise with a phillips head screwdriver to lock into position. Repeat step 9 to 14 for the 5 remaining drawers.



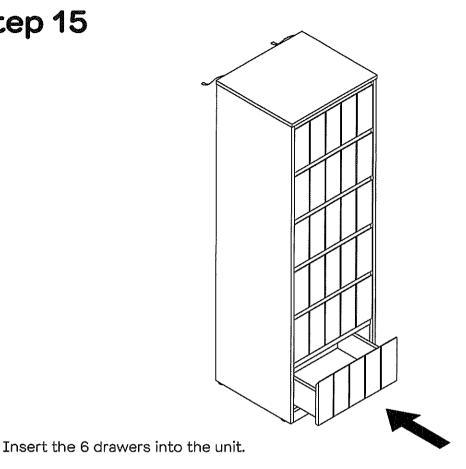

## Step 16

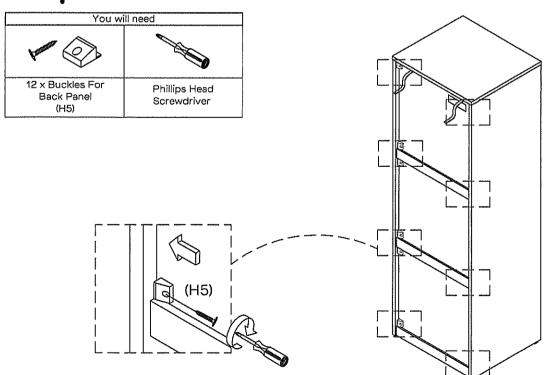


Insert the 12 x buckles (H5) into the frame as shown with a phillips head screwdriver.






Move the slimboy to its final position and then secure the wall straps to the wall. Ensure it is firmly attached. The screws and wall plugs are not provided. Please use appropriate fixtures for your wall. Seek advice from a qualified tradesperson on how to attach this safety straps to your specific wall.

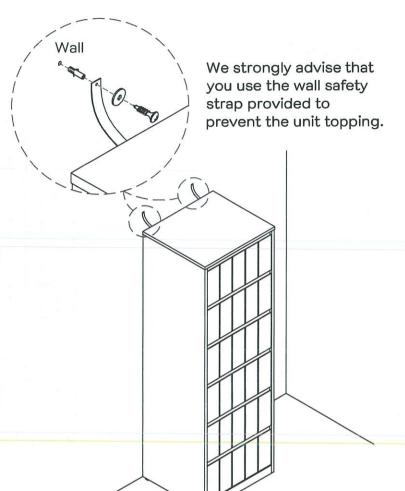

#### Step 18



# **Job Complete!**

In the interest of our environment please dispose of all packaging thoughtfully.