




**Fantastic
Furniture**

Version 1.0

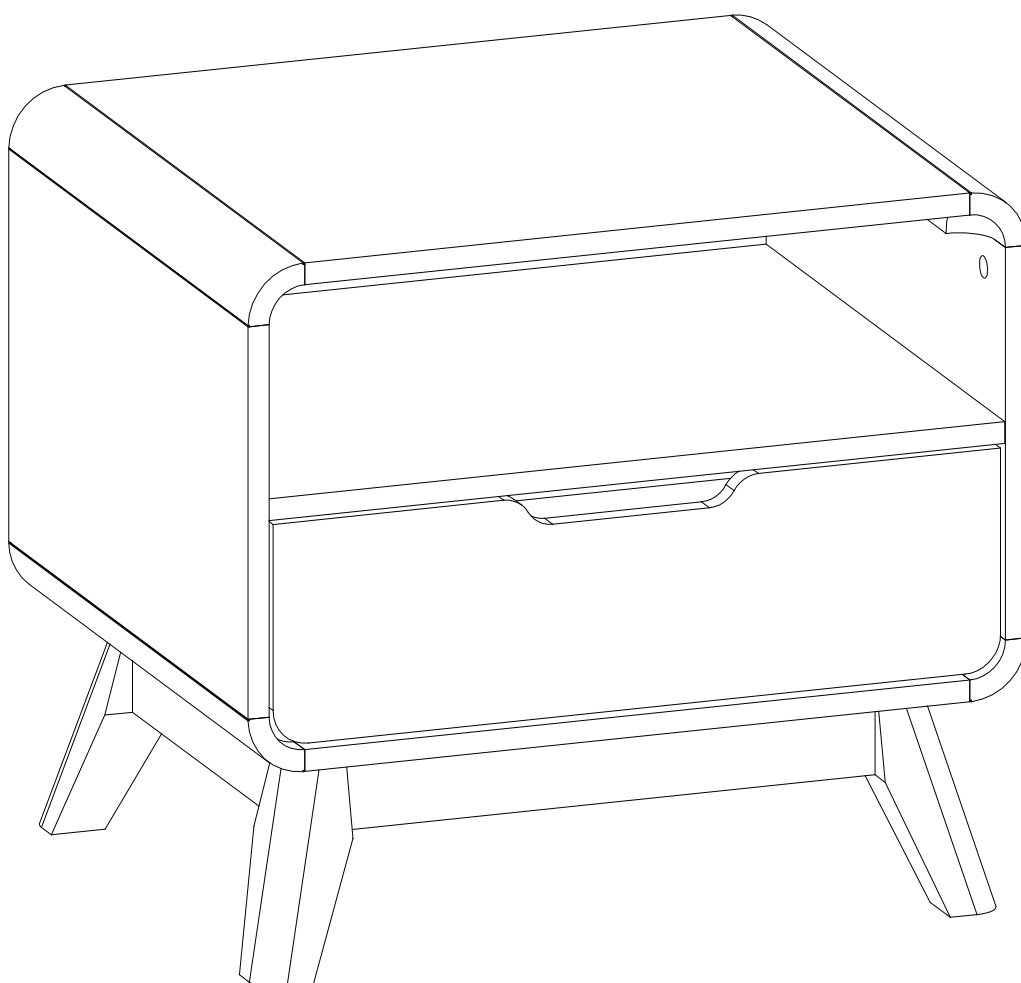

Two People



Required

Vior

Lamp Table 1 drawer

fantasticfurniture.com.au

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram
for you chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

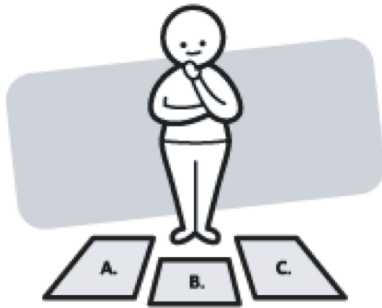

Identify and lay out all of the components before you begin assembly.

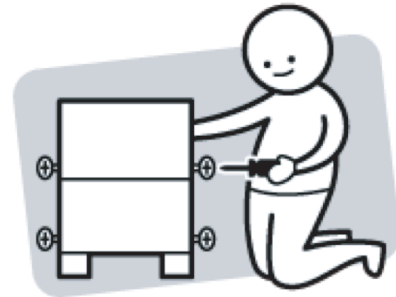

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE



Two People



Required



Othe tools you need

Flat head screwdriver; Phillips head screwdriver; Mallet

Parts list

Box 1:

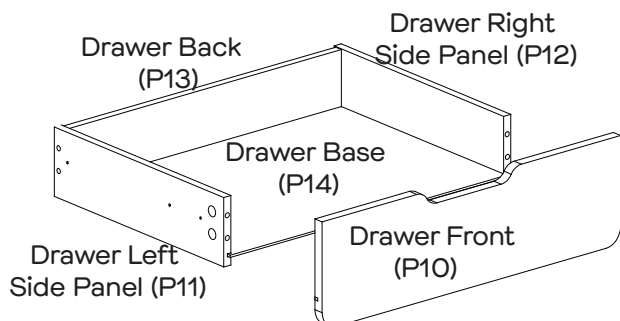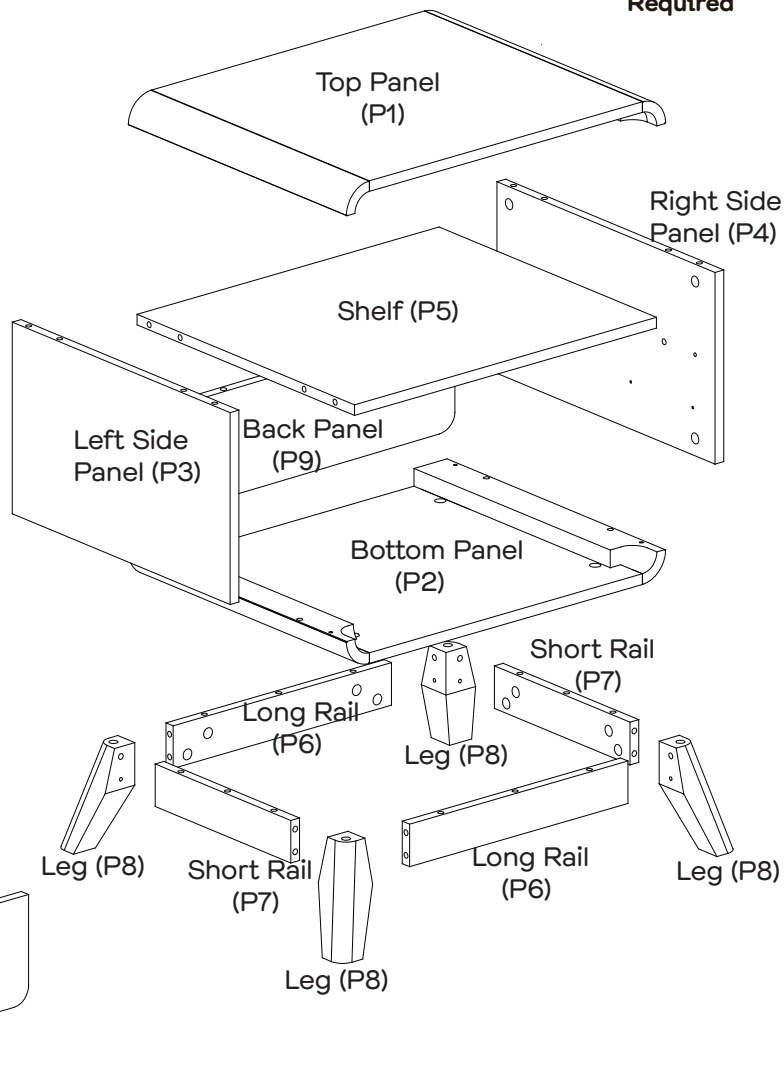

Top Panel (P1);
Bottom Panel (P2);
Left Side Panel (P3);
Right Side Panel (P4);
Shelf (P5);
2 x Long Rail (P6);
2 x Short Rail (P7);
4 x Leg (P8);
Back Panel (P9);
Drawer Front (P10);
Drawer Left Side Panel (P11);
Drawer Right Side Panel (P12);
Drawer Back (P13);
Drawer Base (P14);
Hardware Pack.




Hardware pack

36 x Cam Bolts (H1)	32 x Big Cam Nuts (H2)	28 x Dowels (H3)	4 x Felt Feet (H4)	4 x Small Cam Nuts (H5)	14 x Screws (H6)	6 x Screws (H7)
4 x Screws (H8)	1 x Left Runner Track (H11)	1 x Left Runner (H12)	1 x Right Runner Track (H13)	1 x Right Runner (H14)		



Step 1

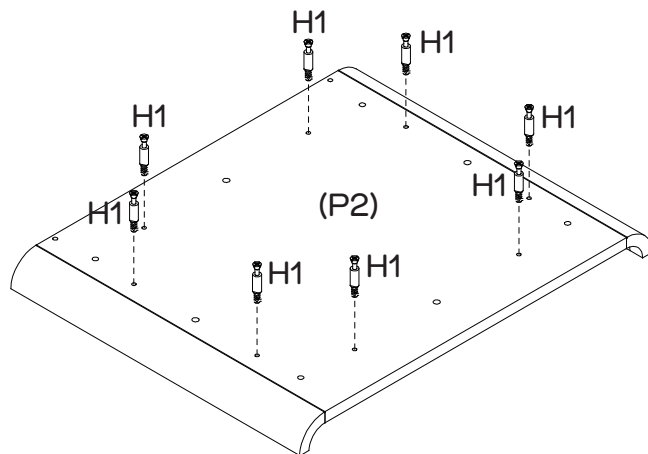
You will need	
	
8 x Cam bolts (H1)	Phillips head screwdriver



Screw 8 x cam bolts (H1) into bottom panel (P2) as shown, tighten with a Phillips head screwdriver.




Step 2

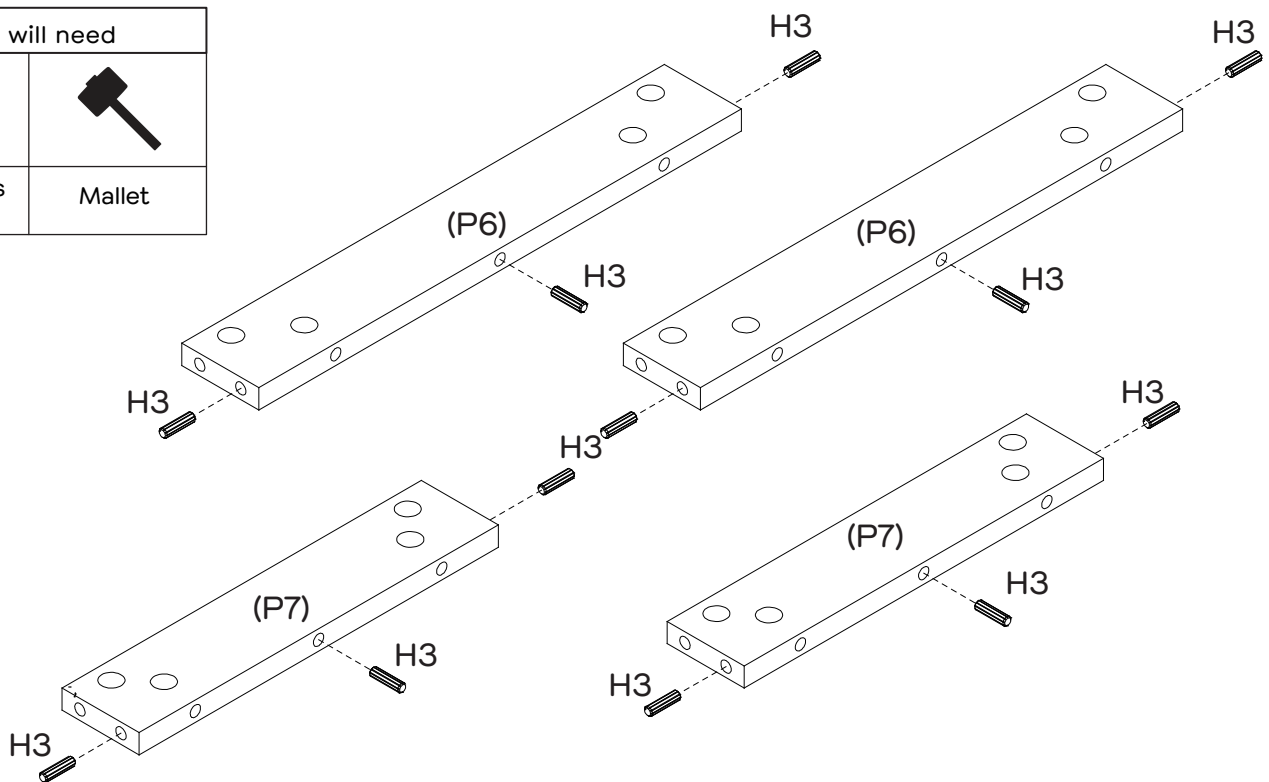
You will need	
	
12 x Dowels (H3)	Mallet



Insert 3 x dowels (H3) into each short rail (P7) as shown.
Insert 3 x dowels (H3) into each long rail (P6) as shown.
Use a mallet to gently tap the dowels into place if needed.



Step 3

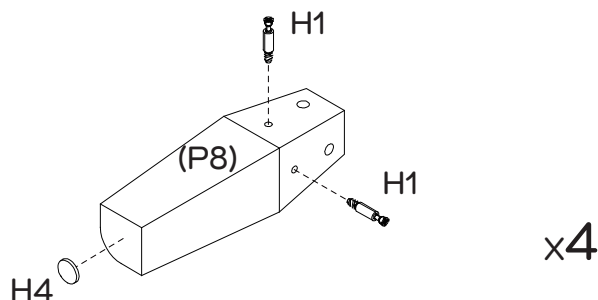
You will need	
	
8 x Cam bolts (H1)	Phillips head screwdriver
	
4 x Felt feet (H4)	




Screw 2 x cam bolts (H1) into each leg (P8) using a Phillips head screwdriver.
Attach 1 x felt feet (H4) onto each leg (P8) as shown.

Step 4

You will need	
	
4 x Big cam nuts (H2)	Phillips head screwdriver

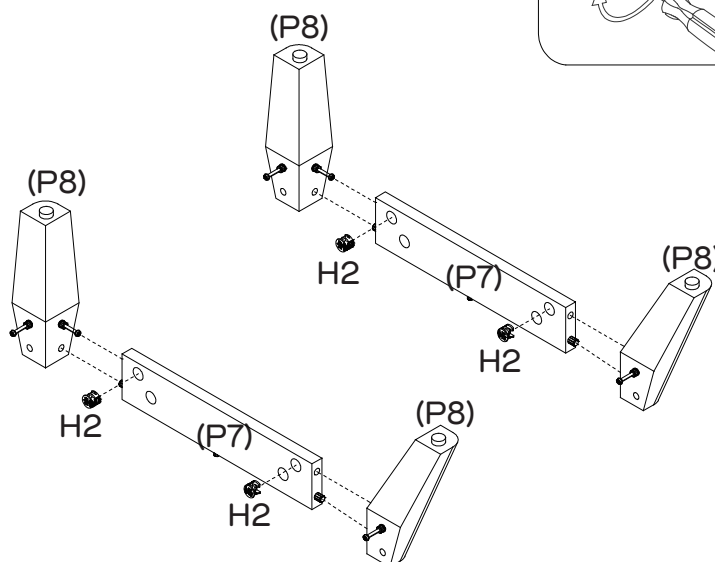



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Fit each short rail (P7) between 2 x legs (P8).
Insert 2 x big cam nuts (H2) each into short rail (P7).
Turn the big cam nuts (H2) clockwise to lock using a Phillips head screwdriver.

Step 5

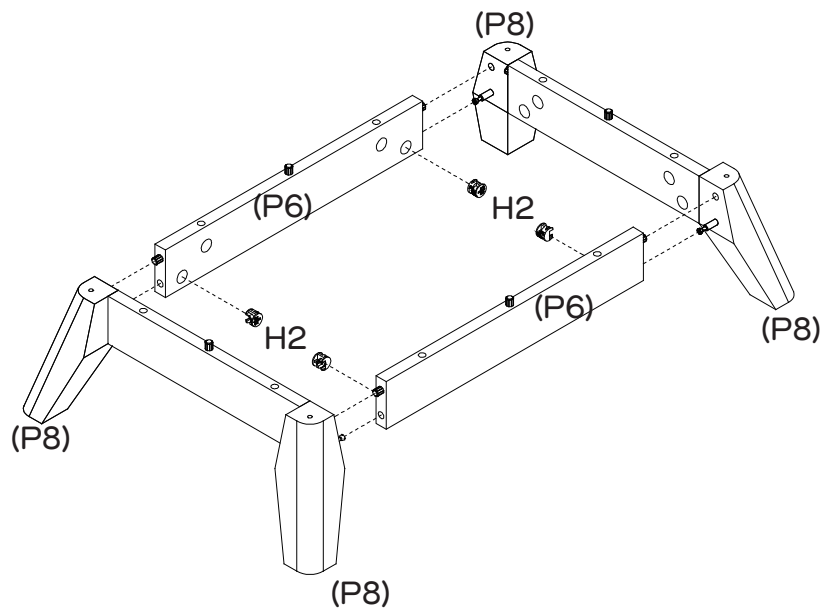

You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver




Position 2 x long rail (P6) between the assembled unit as shown.

Insert 4 x big cam nuts (H2) into long rails (P6), and using a flat head screwdriver, turn clockwise to lock.

Step 6

You will need	
	
8 x Big cam nuts (H2)	Flat head screwdriver


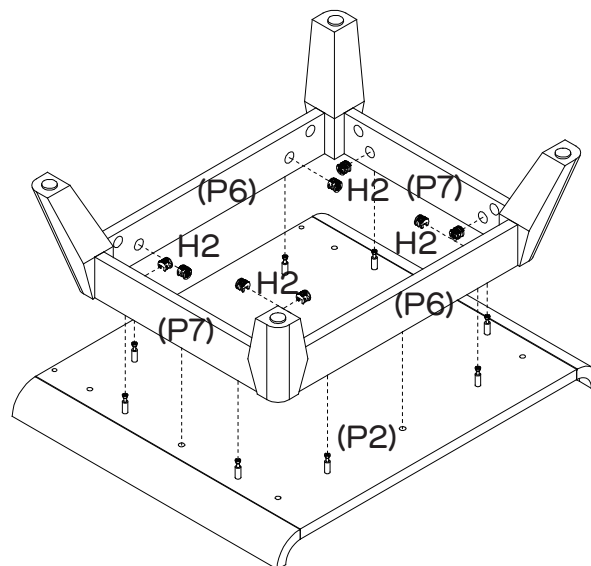



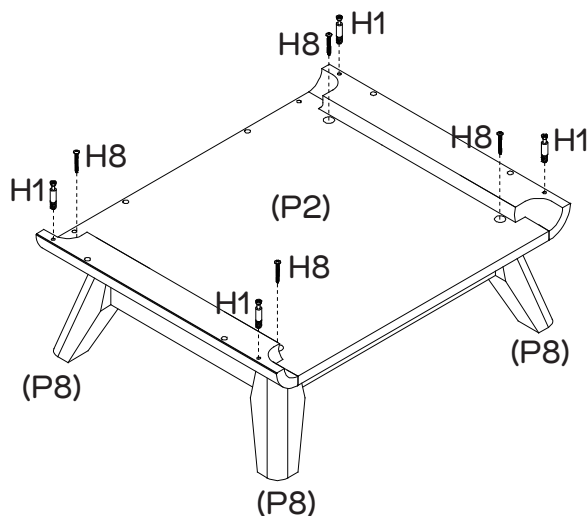
Position the leg assembly onto bottom panel (P2), making sure the cam bolts on the bottom panel (P2) are inserted into the holes on the leg assembly.

Insert 8 x big cam nuts (H2) into short rails (P7) and long rails (P6), using a flat head screwdriver, turn clockwise to lock.

Carefully turn the unit over.

Step 7

You will need	
	
4 x Cam bolts (H1)	4 x Screws (H8)
	
Phillips head screwdriver	




Screw 4 x cam bolts (H1) into bottom panel (P2) as shown, tighten with a Phillips head screwdriver.

Fasten the legs (P8) through bottom panel (P2) with 4 x screws (H8) with a Phillips head screwdriver as shown.

Step 8

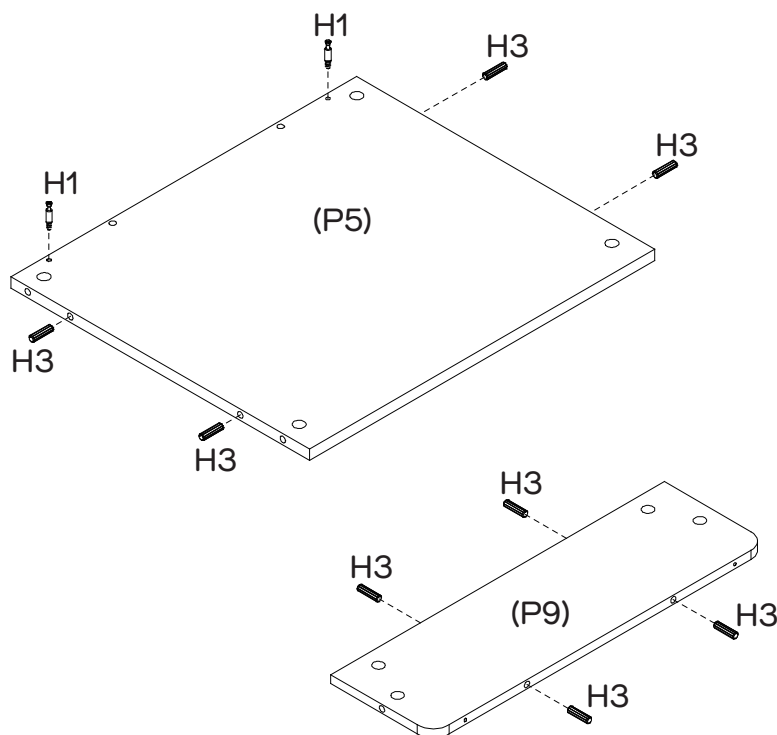

You will need	
	
8 x Dowels (H3)	2 x Cam bolts (H1)
	
Mallet	Phillips head screwdriver




Insert 4 x dowels (H3) into each back panel (P9) and shelf (P5).

Screw 2 x cam bolts (H1) into shelf (P5) as shown, tighten with a Phillips head screwdriver.

Step 9

You will need	
	
2 x Big cam nuts (H2)	Flat head screwdriver

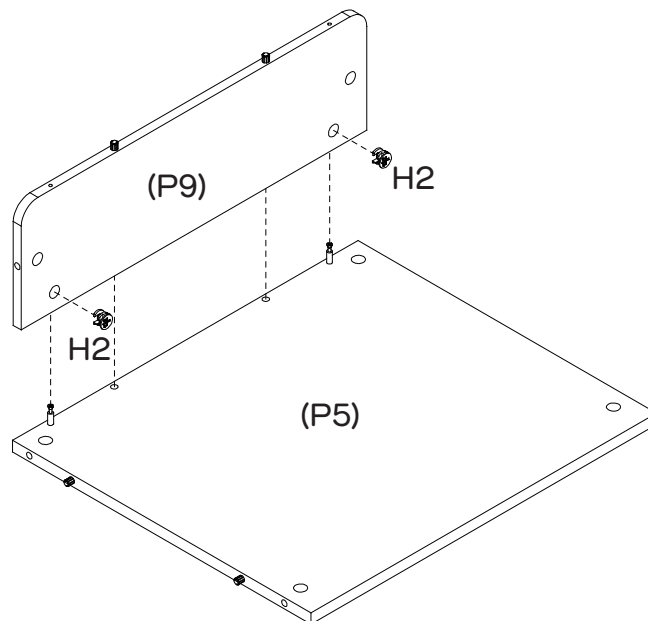


Attach back panel (P9) to shelf (P5).


Insert 2 x big cam nuts (H2) into back panel (P9).

Rotate the cam nuts so the arrows point towards the incoming cam bolt.

Push back panel (P9) into place and tighten the cam nuts, using a flat head screwdriver.

Step 10

You will need	
	
6 x Cam bolts (H1)	8 x Dowels (H3)
	
Phillips head screwdriver	Mallet

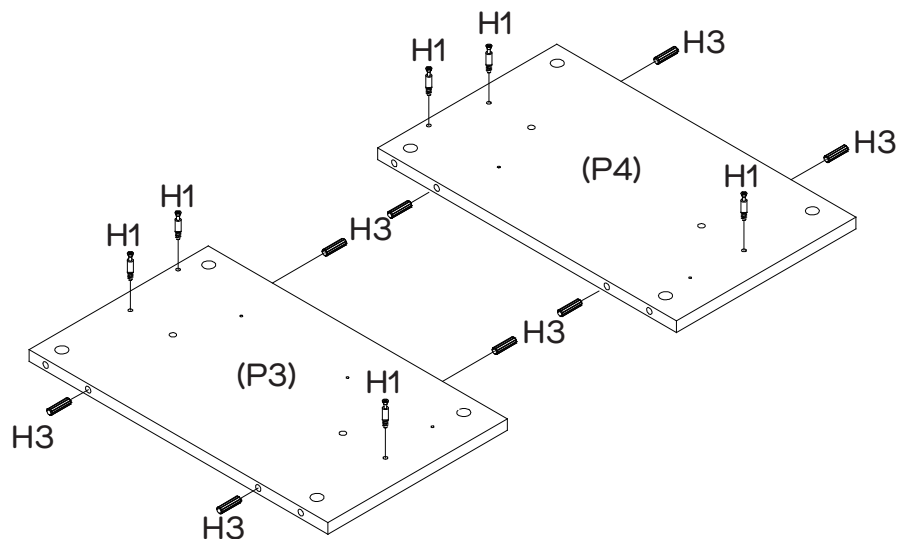







Insert 4 x dowels (H3) into each side panel (P3) & (P4).

Screw 3 x cam bolts (H1) into each side panel (P3) & (P4),

tighten with a Phillips head screwdriver.



Step 11

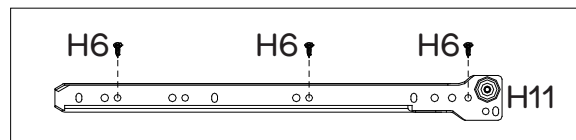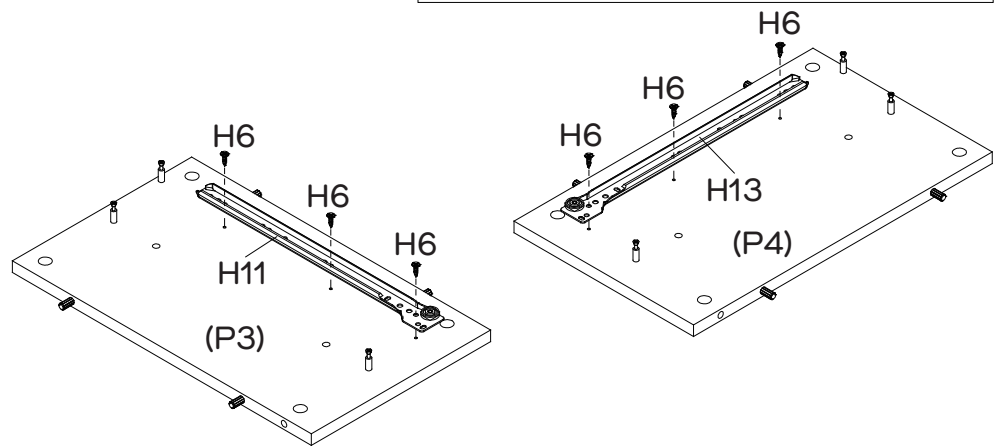
You will need	
	
1 x Left runner track (H11)	1 x Right runner track (H13)
	
6 x Screws (H6)	Phillips head screwdriver




Attach 1 x left runner track (H11) to left side panel (P3) with 3 x screws (H6).
Attach 1 x right runner track (H13) to right side panels (P4) with 3 x screws (H6),
and tighten all screws with a Phillips head screwdriver.

Step 12

You will need	
	
3 x Big cam nuts (H2)	Flat head screwdriver

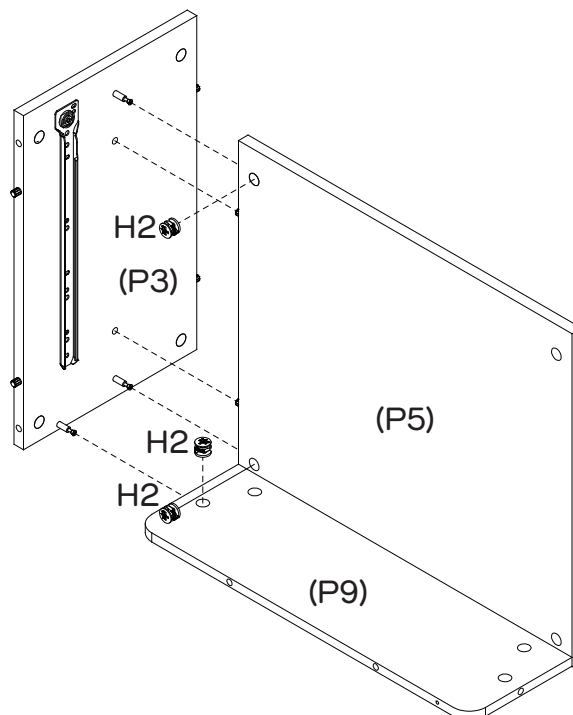



Two People





Required

Attach left side panel (P3) to shelf (P5) and back panel (P9) .
Insert 3 x big cam nuts (H2) into back panel (P9) and shelf (P5), and using a flat head screwdriver, turn clockwise to lock.

Step 13



You will need	
	
3 x Big cam nuts (H2)	Flat head screwdriver

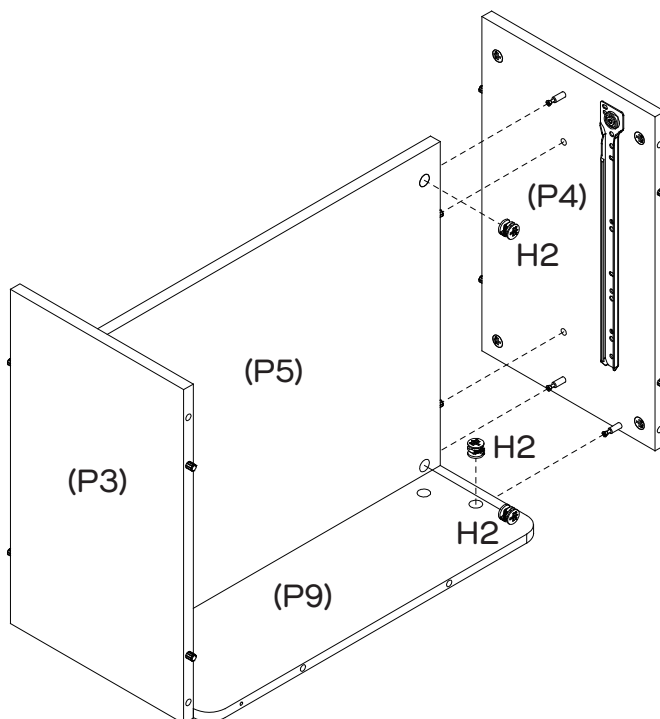Two People





Attach right side panel (P4) to back panel (P9) and shelf (P5).
Insert 3 x big cam nuts (H2) into back panel (P9) and shelf (P5) and using a flat head screwdriver, turn clockwise to lock.

Step 14



You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver


Two People

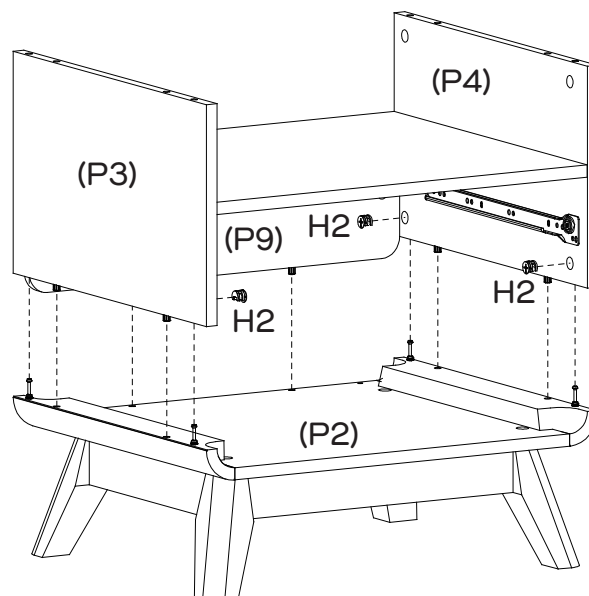

Attach side panels (P3) & (P4) and back panel (P9) to bottom panel (P2).
Insert 4 x big cam nuts (H2) into side panels (P3) and (P4), turn clockwise to lock using a flat head screwdriver.



Step 15

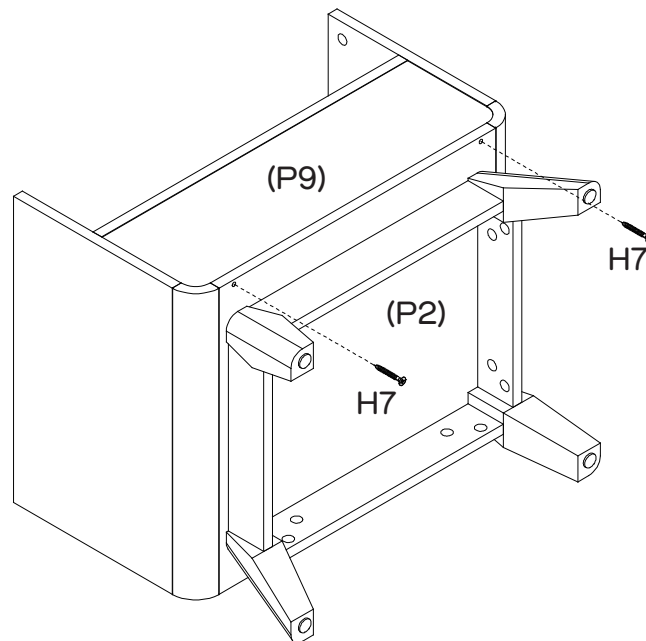
You will need	
	
2 x Screws (H7)	Phillips head screwdriver



Fasten back panel (P9) to bottom panel (P2) with 2 x screws (H7) using a Phillips head screwdriver.



Step 16

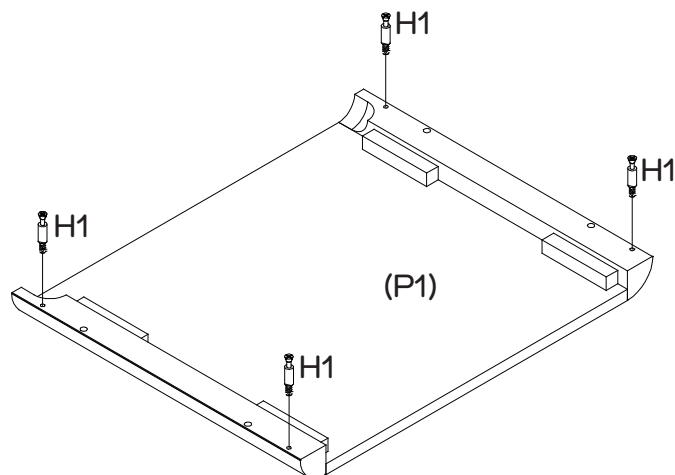
You will need	
	
4 x Cam bolts (H1)	Flat head screwdriver



Screw 4 x cam bolts (H1) into top panel (P1) using a flat head screwdriver.

Step 17

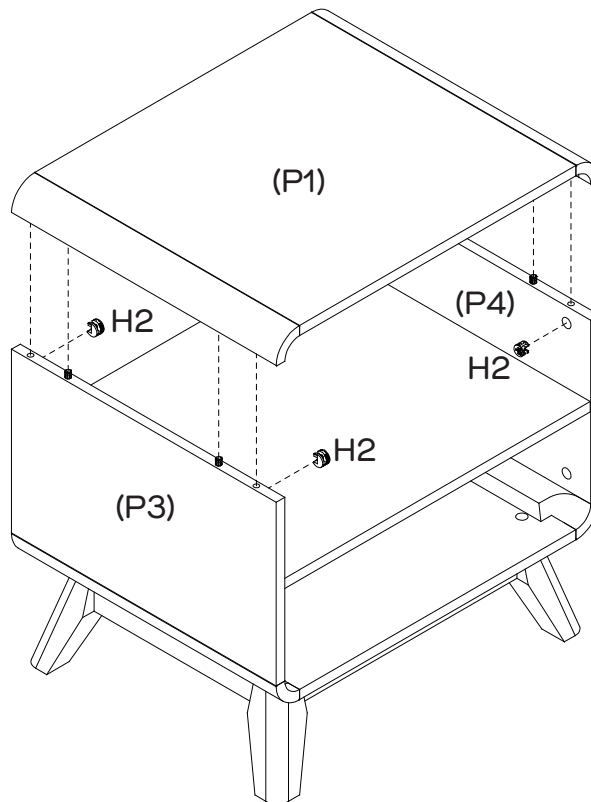

You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver




Attach top panel (P1) to side panels (P3) & (P4).

Insert 4 x big cam nuts (H2) into side panels (P3) & (P4), turn clockwise to lock using a flat head screwdriver.



Step 18


You will need	
	
4 x Screws (H7)	Phillips head screwdriver

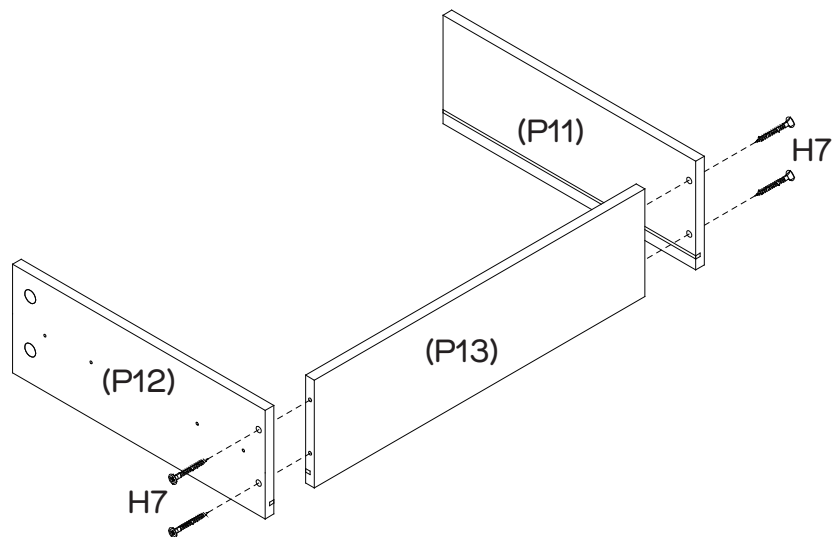

Attach drawer side panels (P11) and (P12) to drawer back (P13) with 4 x screws (H7). Tighten the screws using a Phillips head screwdriver.


Step 19

You will need	
	
4 x Cam bolts (H1)	Phillips head screwdriver

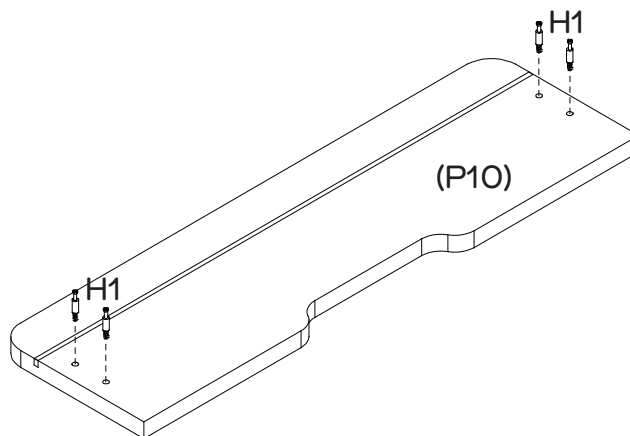



Screw 4 x cam bolts (H1) into drawer front (P10) using a Phillips head screwdriver.

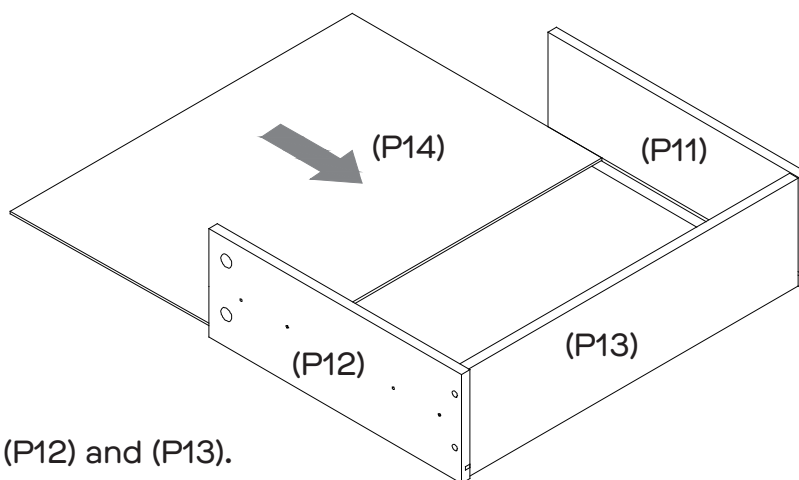
Step 20



Slide drawer base (P14) into the groove in drawer panels (P11), (P12) and (P13).

Step 21


You will need	
	
4 x Small cam nuts (H5)	Flat head screwdriver

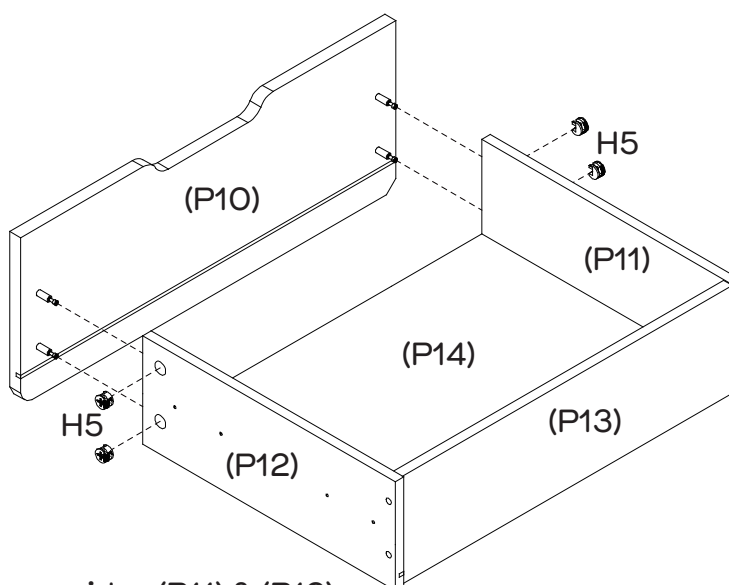

Attach drawer front (P10) to drawer sides (P11) & (P12).
 Insert 4 x small cam nuts (H5) into drawer sides (P11) & (P12).
 Rotate the cam nuts so the arrows point towards the incoming cam bolt. Push drawer front (P10) into place and using a flat head screwdriver, turn the cam nuts clockwise to lock.


Step 22

You will need	
1 x Left runner (H12)	1 x Right runner (H14)
8 x Screws (H6)	Phillips head screwdriver

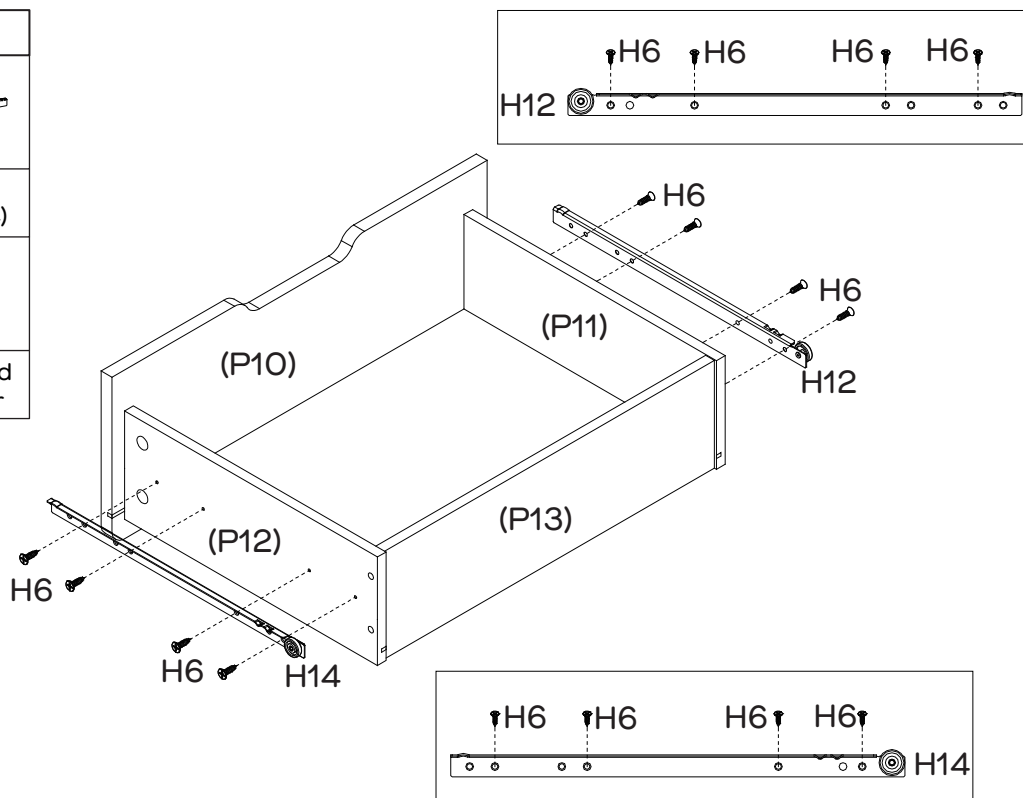


Attach 1 x left runner (H12) to drawer left side Panel (P11) with 4 x screws (H6).
 Attach 1 x right runner (H14) to drawer right side panel (P12) with 4 x screws (H6).
 Tighten all screws with a Phillips head screwdriver.

Step 23

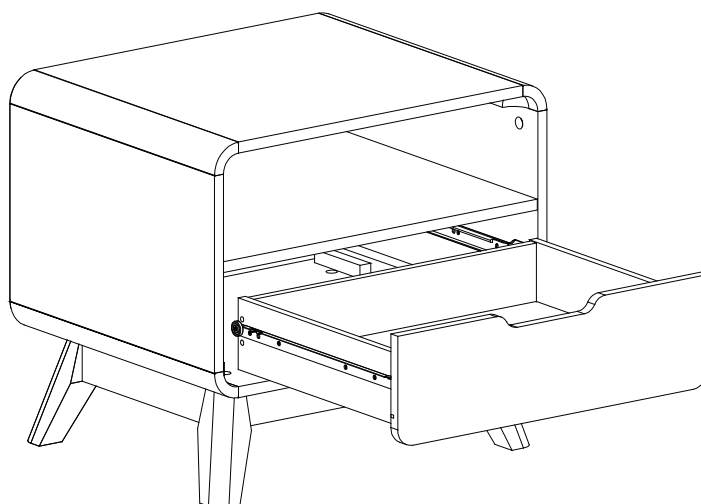

Slide the drawer into the frame.

Step 24

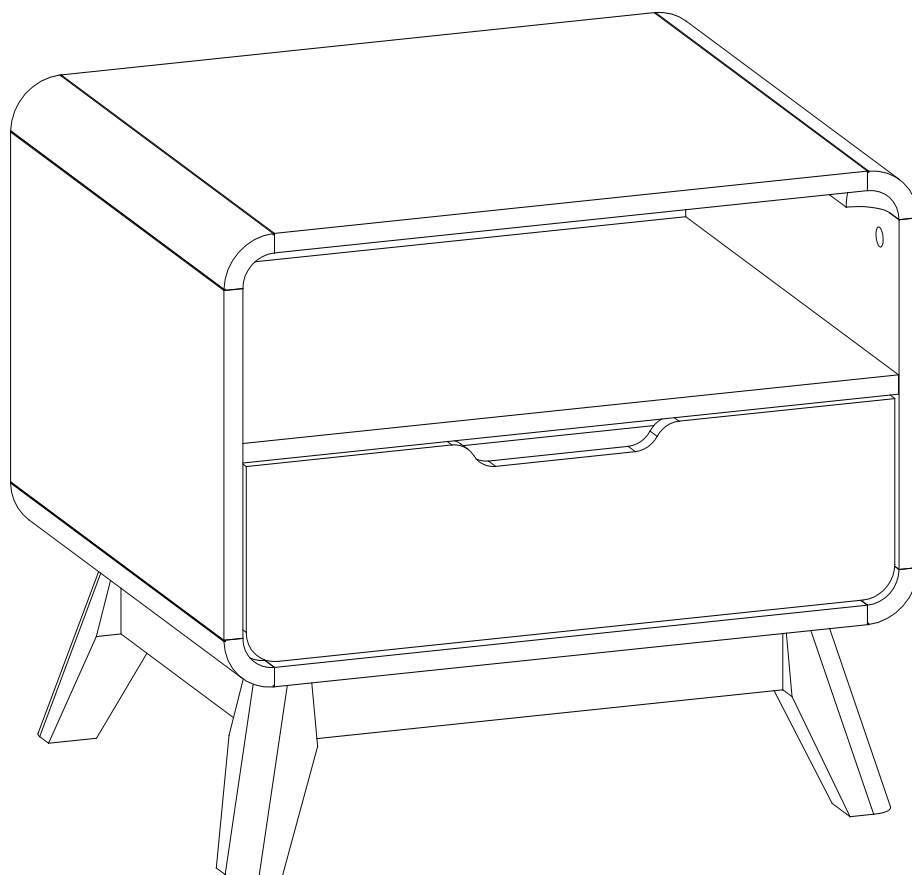

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.