




Version 1.0



TWO PEOPLE

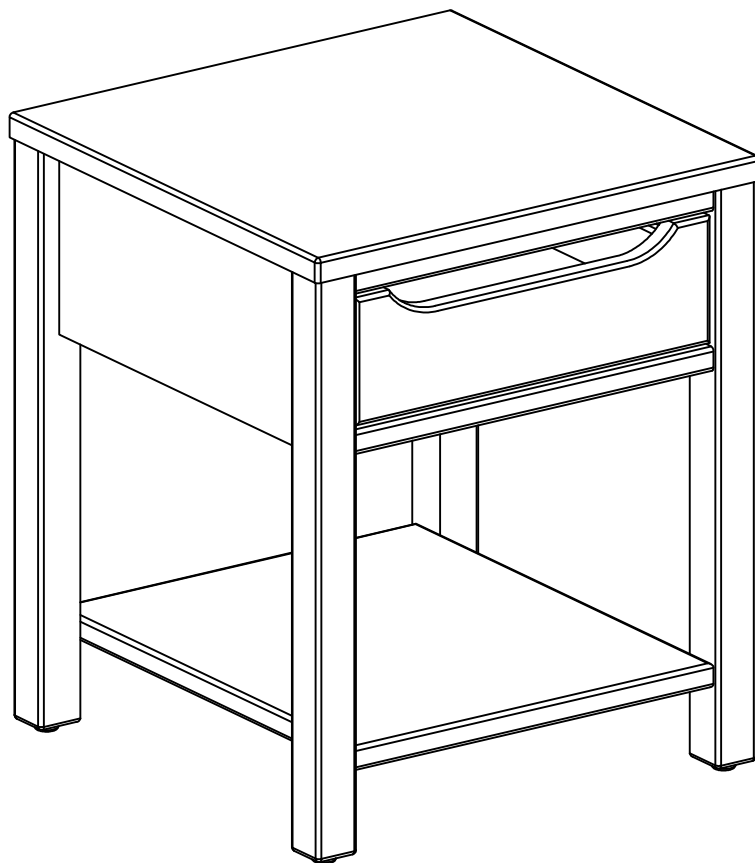

REQUIRED

Cooper

Bedside 1 Drawer

www.fantasticfurniture.com.au

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools.
Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What You Need

To Assemble the Product





Other Tools You Need
Phillips Head Screwdriver


Part List


Box 1:

- 1 x Top Panel (P1);
- 1 x Left Side Panel (P2);
- 1 x Right Side Panel (P3);
- 1 x Top Panel Rail (P4);
- 1 x Front Rail (P5);
- 1 x Shelf (P6);
- 1 x Back Panel (P7);
- 1 x Drawer Front (P8);
- 1 x Left Drawer Side (P9);
- 1 x Right Drawer Side (P10);
- 1 x Drawer Back (P11);
- 1 x Drawer Base (P12);
- Hardware Pack

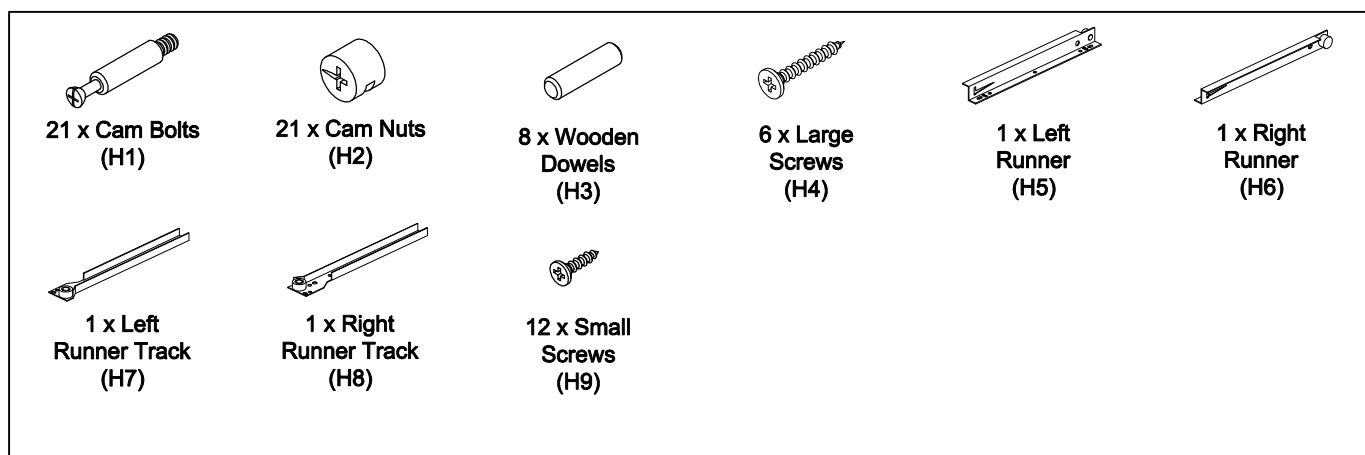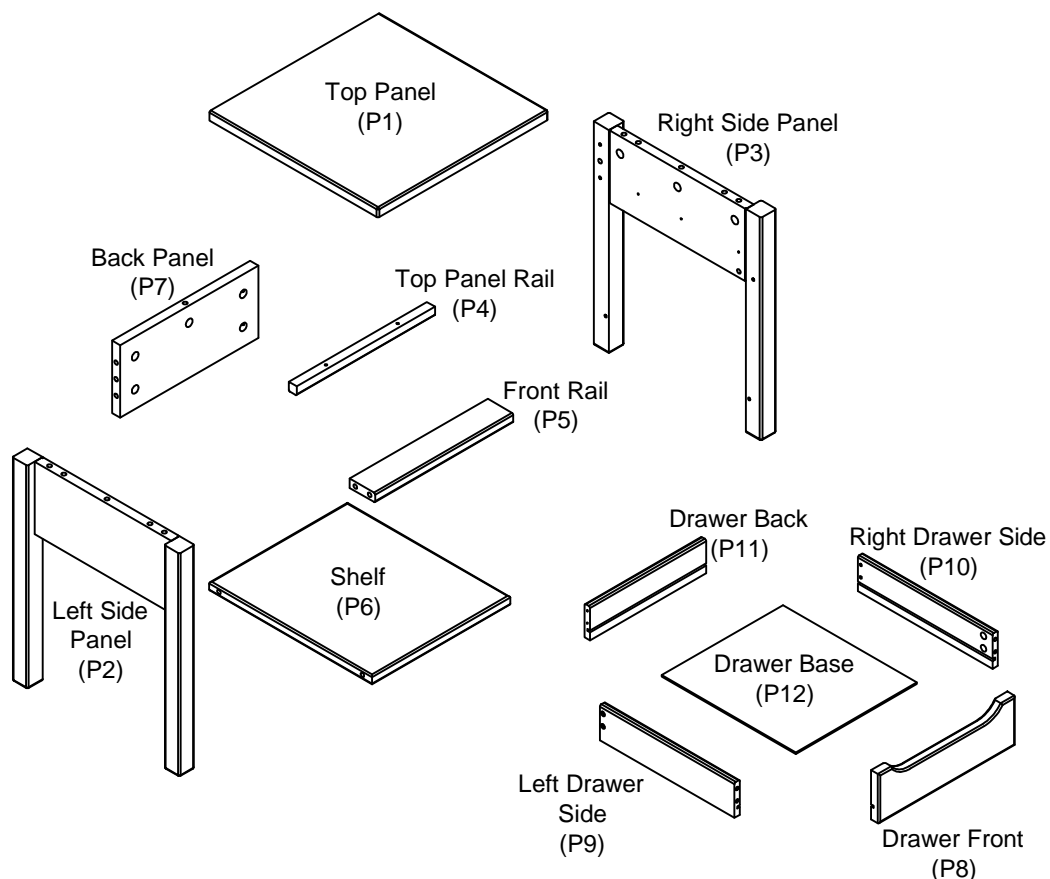




Step 1


You will need	
	
4 x Wooden Dowels (H3)	

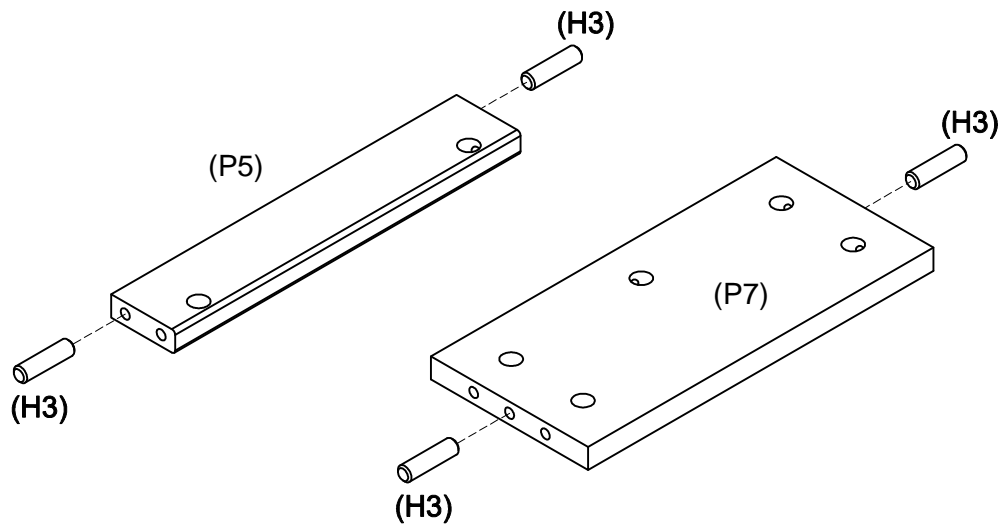

Insert 2 x wooden dowels (H3) into the front rail (P5).
Insert 2 x wooden dowels (H3) into the back panel (P7).

Step 2



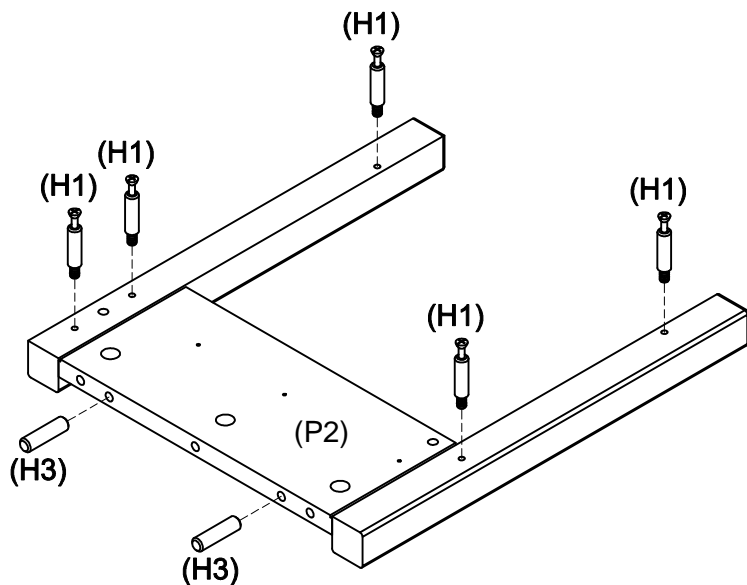You will need	
	
5 x Cam Bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	




Fix 5 x cam bolts (H1) to the left side panel (P2) by tightening with a phillips head screwdriver.

Insert 2 x wooden dowels (H3) into the left side panel (P2).




Step 3


You will need	
	
1 x Left Runner Track (H7)	Phillips head screwdriver
	
3 x Small Screws (H9)	

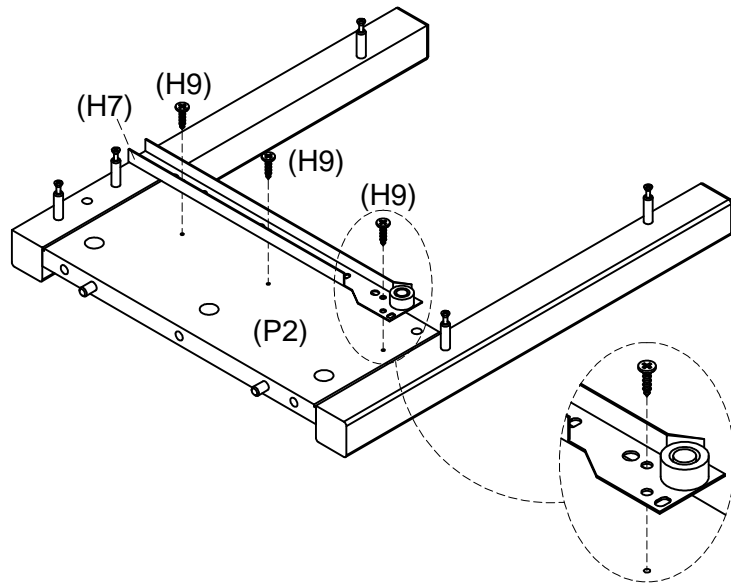

Fix the left runner track (H7) to the left side panel (P2) with 3 x small screws (H9) by tightening with a phillips head screwdriver.

Step 4



You will need	
	
5 x Cam Bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	

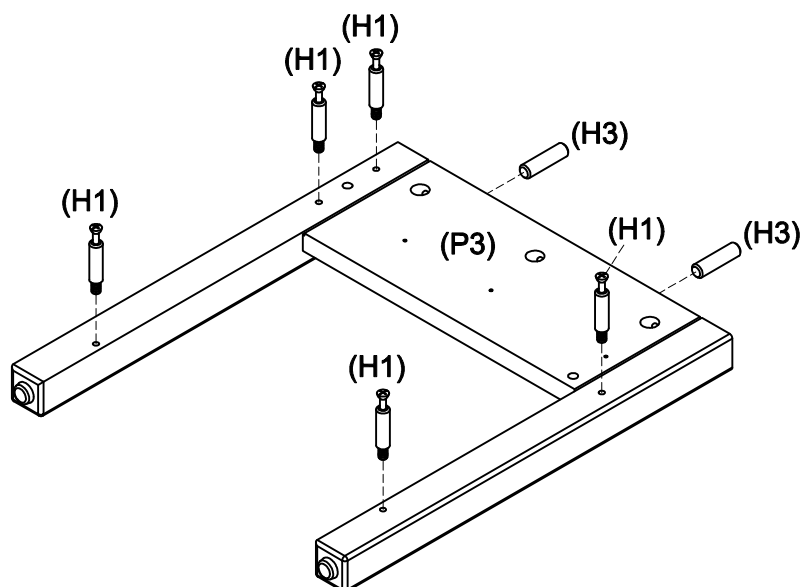


Fix 5 x cam bolts (H1) to the right side panel (P3) by tightening with a phillips head screwdriver.

Insert 2 x wooden dowels (H3) into the right side panel (P3).



Step 5


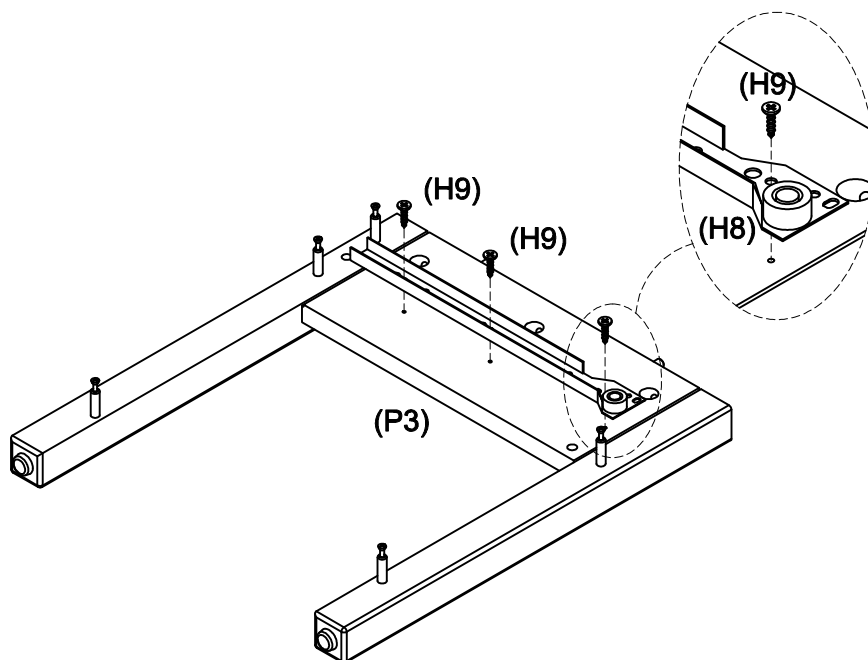
You will need	
	
1 x Right Runner Track (H8)	Phillips head screwdriver
	
3 x Small Screws (H9)	



Fix the right runner track (H8) to the right side panel (P3) with 3 x small screws (H9) by tightening with a phillips head screwdriver.

Step 6

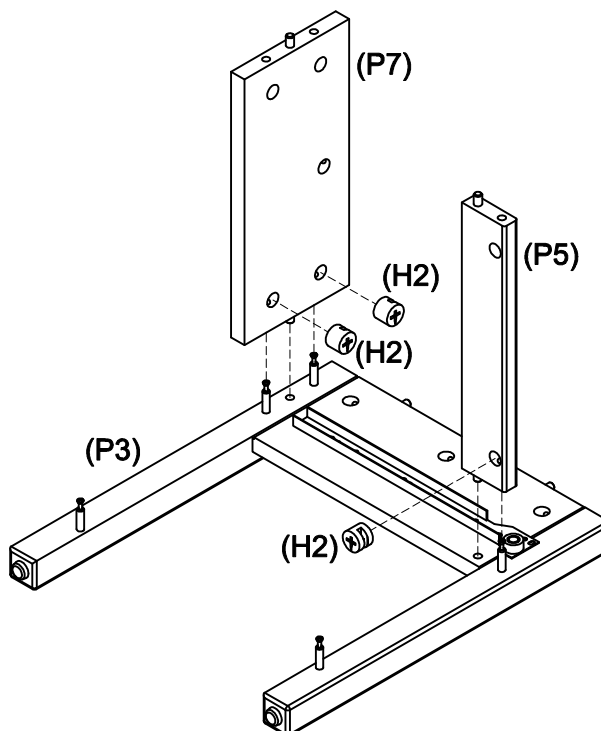

You will need	
	
3 x Cam Nuts (H2)	Phillips head screwdriver





Insert cam nuts (H2) into the front rail (P5) and back panel (P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).

To fix the front rail (P5) and back panel (P7) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 7

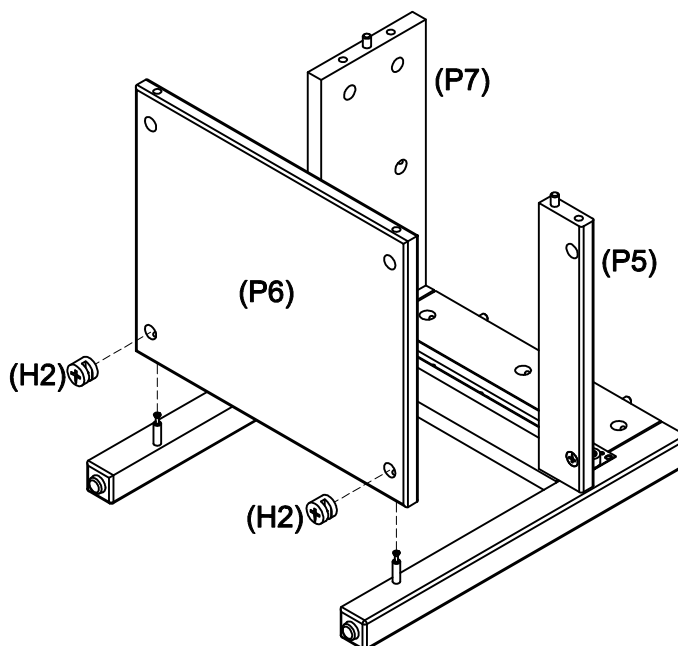

You will need	
	
2 x Cam Nuts (H2)	Phillips head screwdriver



Insert 2 x cam nuts (H2) into the shelf (P6) . Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).
To fix the shelf (P6) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 8


You will need	
	
5 x Cam Nuts (H2)	Phillips head screwdriver

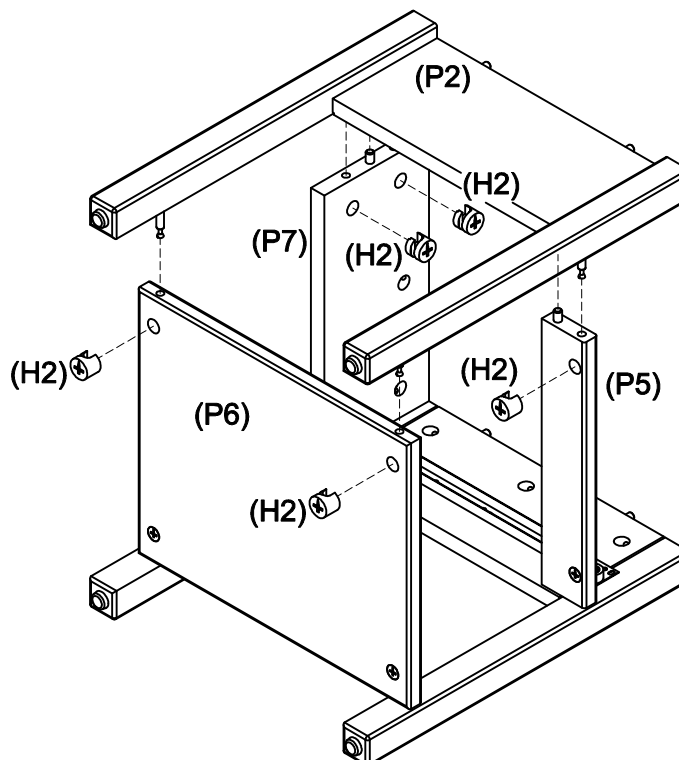

Insert cam nuts (H2) into front rail (P5), shelf (P6) and back panel (P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).
To fix the front rail (P5), shelf (P6) and back panel (P7) to the left side panel (P2), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 9


You will need	
	
7 x Cam Bolts (H1)	Phillips head screwdriver

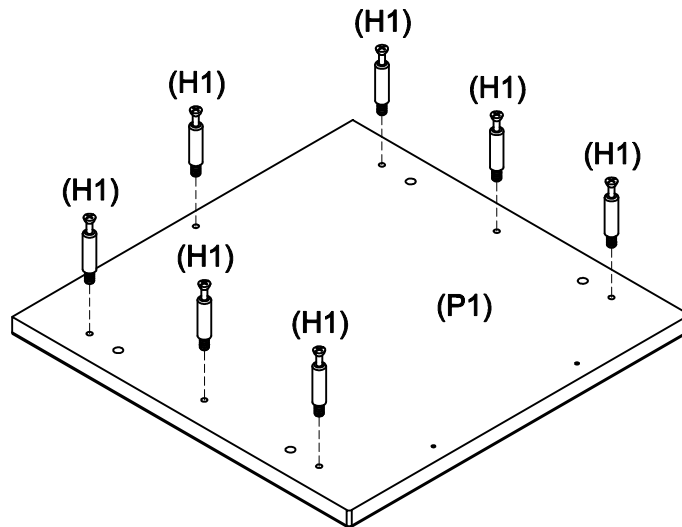

Fix 7 x cam bolts (H1) to the top panel (P1) by tightening with a phillips head screwdriver.



Step 10


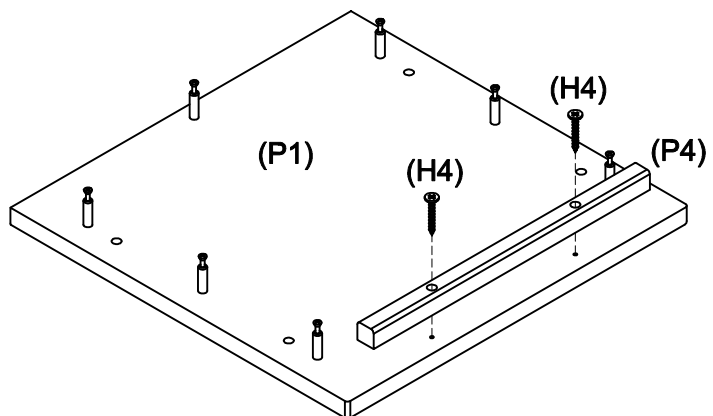
You will need	
	
2 x Large Screws (H4)	Phillips head screwdriver



Fix the top panel rail (P4) to the top panel (P1) with 2 x large screws (H4) by tightening with a phillips head screwdriver.



Step 11


You will need	
	
7 x Cam Nuts (H2)	Phillips head screwdriver

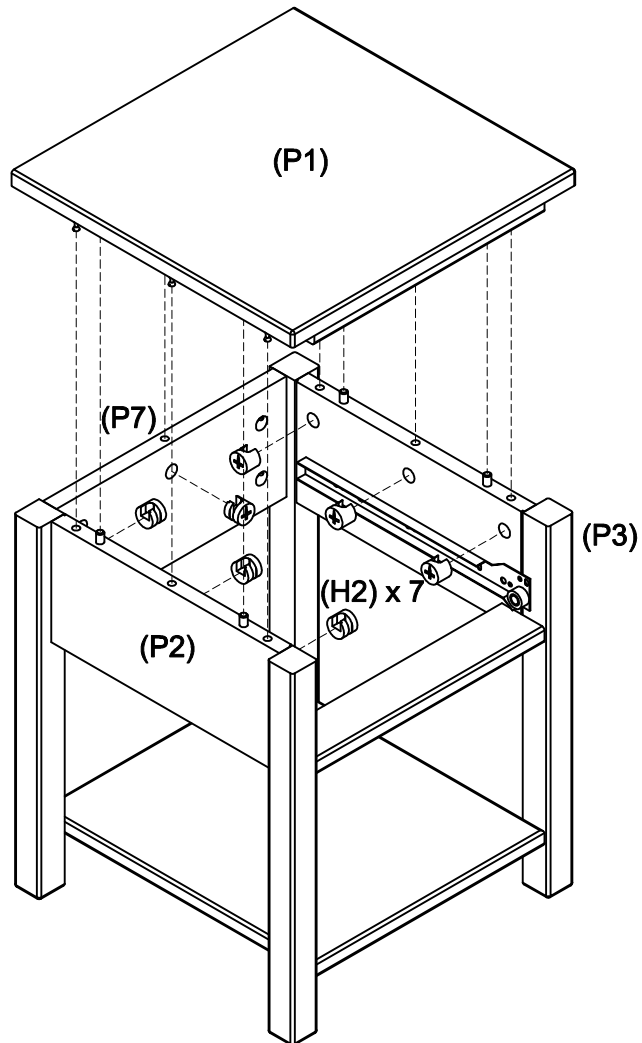

Insert cam nuts (H2) into the left side panel (P2), the right side panel (P3) and the back panel (P7) . Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1). To fix the left side panel (P2), the right side panel (P3) and the back panel (P7) to the top panel (P1), use the phillips head screwdriver to tighten the cam nuts (H2).



Step 12


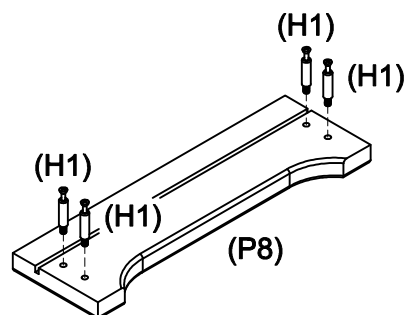
You will need	
	
4 x Cam bolts (H1)	Phillips head screwdriver



Fix 4 x cam bolts (H1) to the drawer front panel (P8) by tightening with a phillips head screwdriver.

Step 13


You will need	
	
4 x Cam Nuts (H2)	Phillips head screwdriver

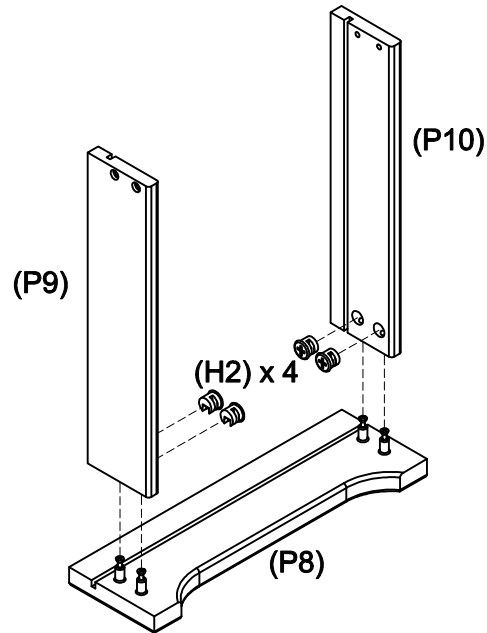

Insert 4 x cam nuts (H2) into the left and right drawer sides (P9, P10), rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).



To secure the left and right drawer sides (P9, P10) to the drawer front (P8), use the phillips head screwdriver to tighten the small cam nuts (H2).


Step 14

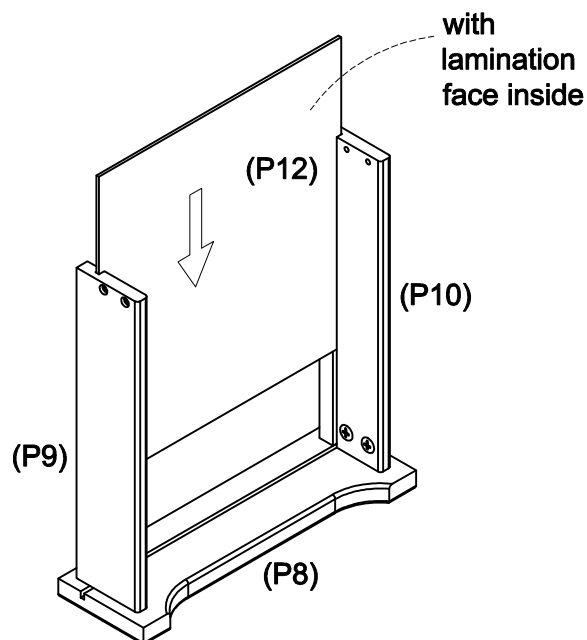

Slide the drawer base (P12) into the grooves of the left and right drawer sides (P9, P10) and the drawer front (P8).


Step 15


You will need	
	
4 x Large Screws (H4)	Phillips head screwdriver

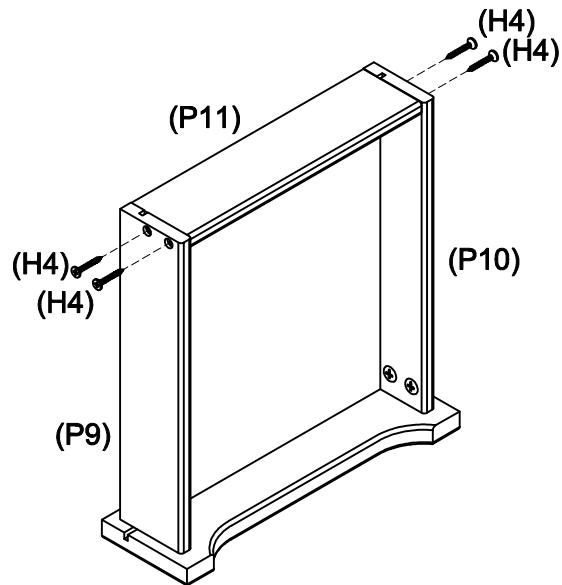

Use 4 x large screws (H4) to fix the drawer back (P11) to the drawer sides (P9, P10), by tightening with the phillips head screwdriver.


Step 16

You will need	
	
6 x Small Screws (H9)	Phillips head screwdriver
	
1 x Left Runner (H5)	1 x Right Runner (H6)

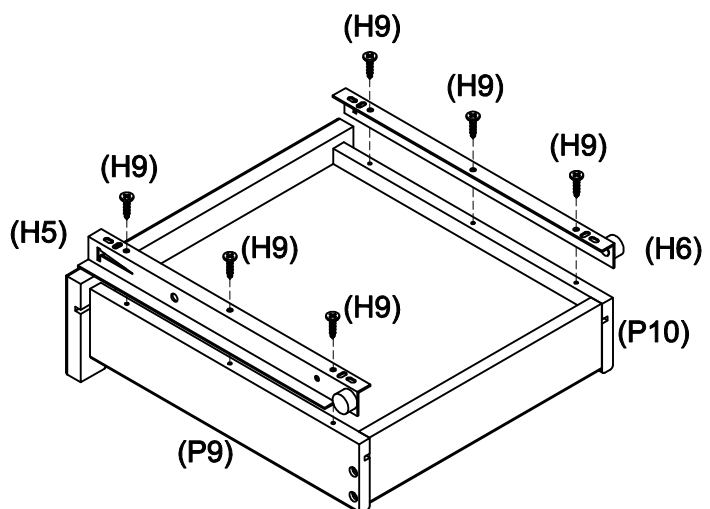


Fix the left runner (H5) to the left drawer side (P9) and right runner (H6) to the right drawer side (P10) with 6 x small screws (H9) by tightening with the phillips head screwdriver.

Step 17

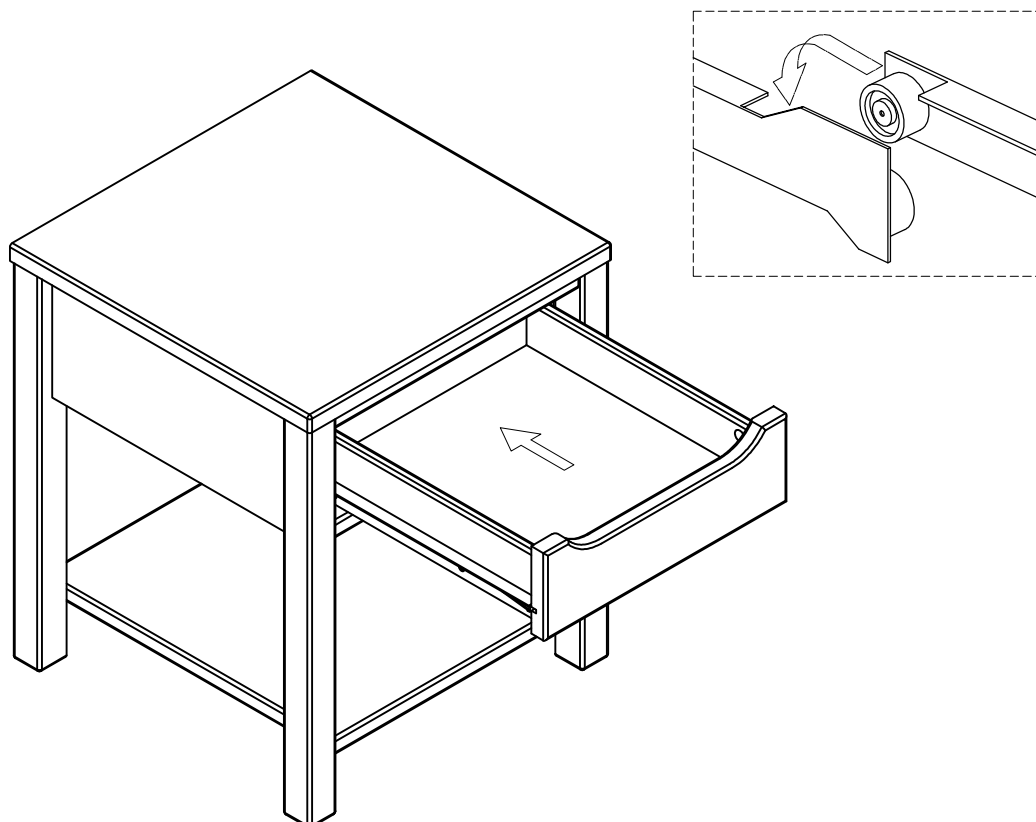

Carefully slide the drawer into the cabinet.

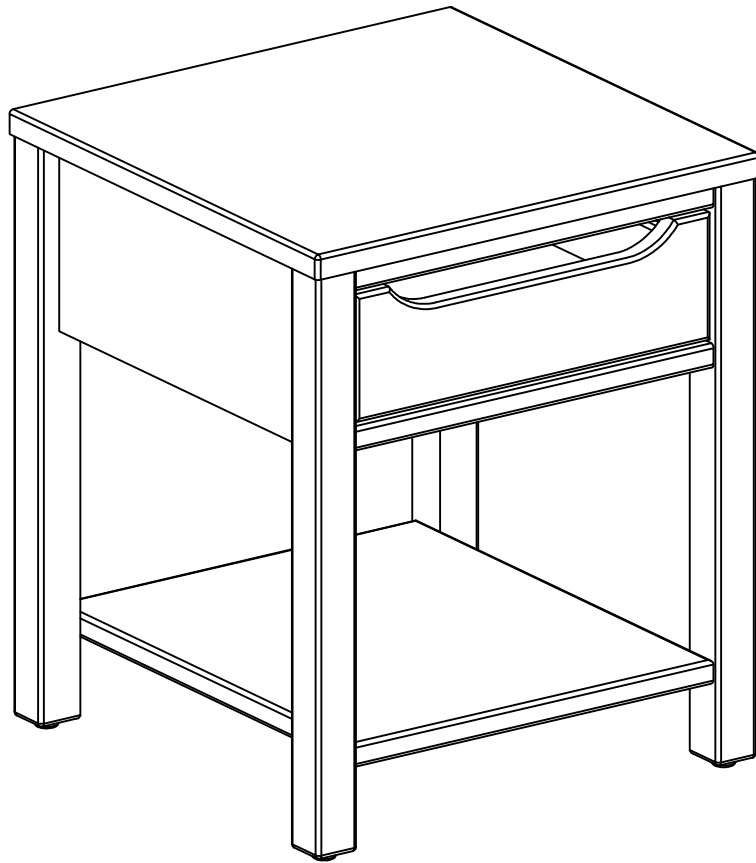


Job Complete!

In the interest of our environment
please dispose of all packing thoughtfully.



Version 1.0

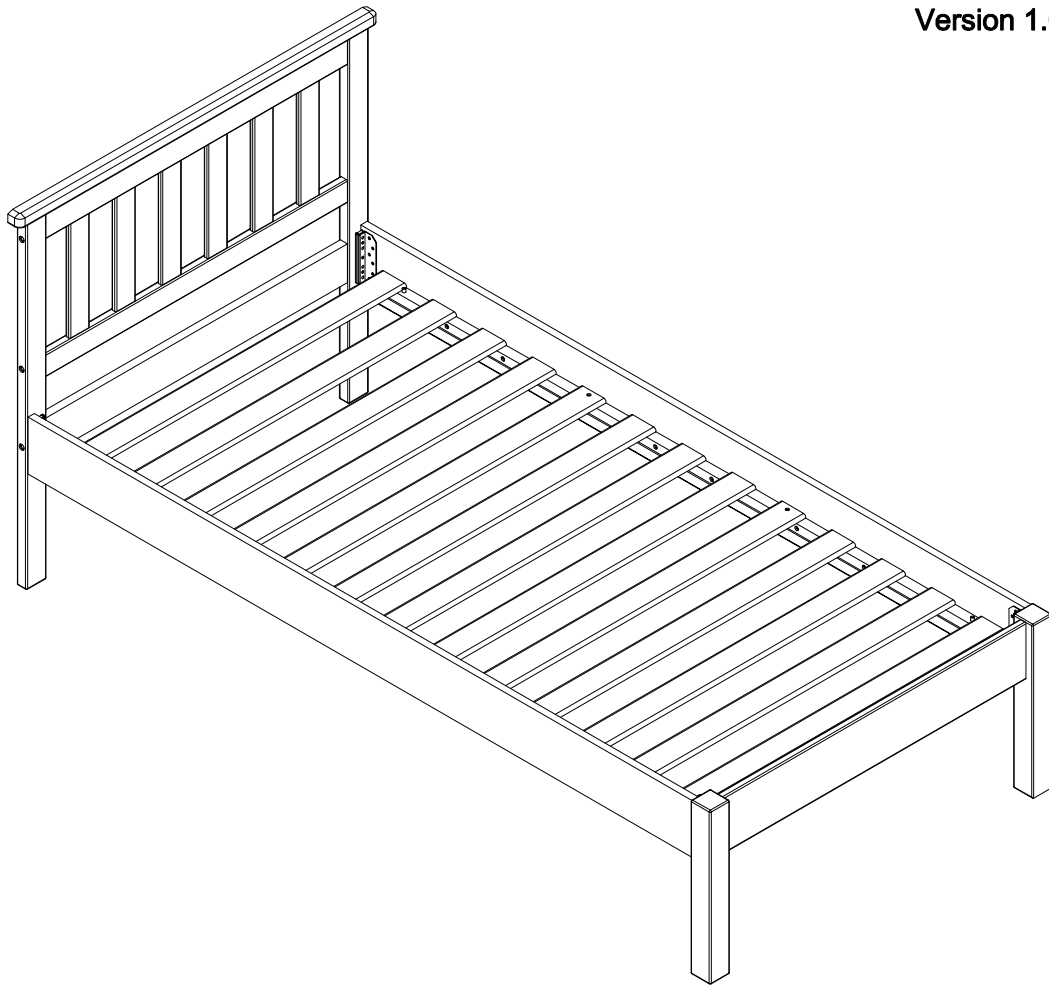

TWO PEOPLE



REQUIRED

Cooper

Single Bed

www.fantasticfurniture.com.au

Enjoy
Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools.
Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What You Need

To Assemble the Product



(Other Tools You Need)
Phillips Head Screwdriver
Mallet

Part List

Box 1:


Headboard Core (P1);
Footboard (P6);

Box 2:


Headboard Rail(P4);
2 x Side Rail (P5)

Box 3:

Left Leg(P2);
Right Leg(P3);
Slats(P7)

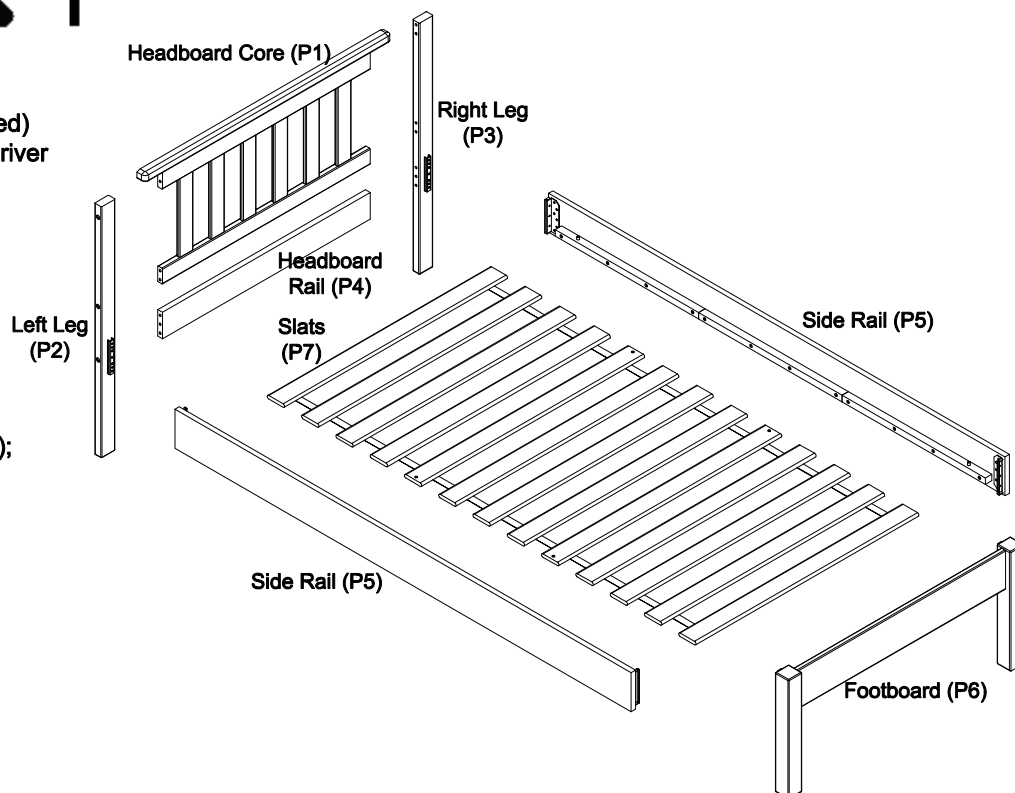

4 x Wood
Screws
(H1)



6 x Large Bolts
(H2)



6x Nuts
(H3)



8 x Wooden
Dowels
(H4)





1 x Allen
Key
(H5)




8 x Small Bolts
(H6)

Please make sure you have all these parts before you start.




Step 1

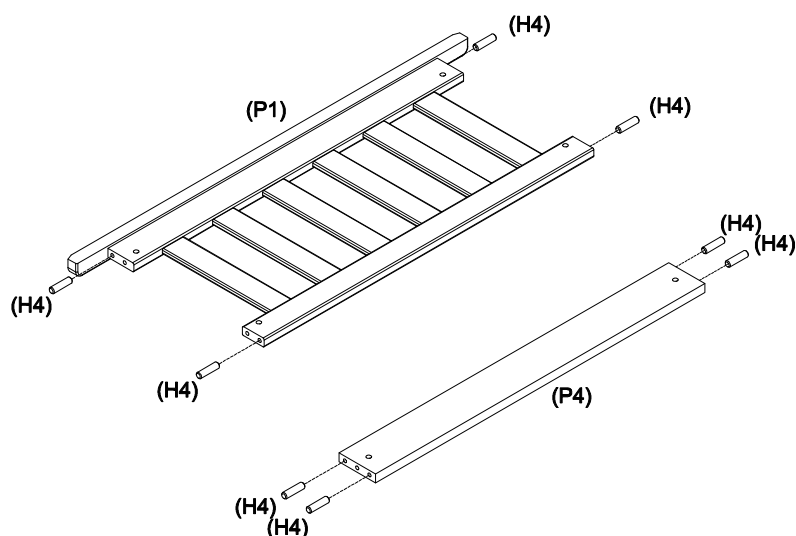
You will need:	
8 x Wooden Dowels (H4)	
Soft Head Mallet	



Insert 8 x wooden dowels (H4) into the headboard core (P1) and headboard rail (P4) as shown, using a soft head mallet.

Step 2

You will need:	
6 x Large Bolts (H2)	
6 x Nuts (H3)	
1 x Allen Key (H5)	

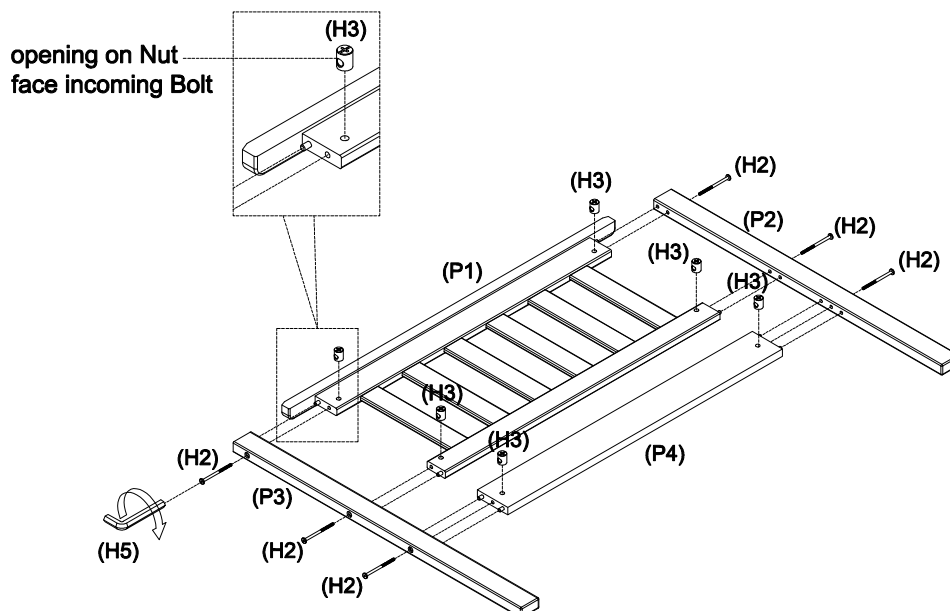

Attach 2 x legs (P2 & P3) to the headboard core (P1) and headboard rail (P4). Insert 6 x nuts (H3) into the headboard rail (P4) and headboard core (P1) as shown. Make sure the opening on the nuts (H3) is facing the incoming bolts, then insert 6 x large bolts (H2), use the allen key (H5) and turn clockwise to fix.


Step 3

You will need:

1 x Allen
Key
(H5)



8 x Small Bolts
(H6)

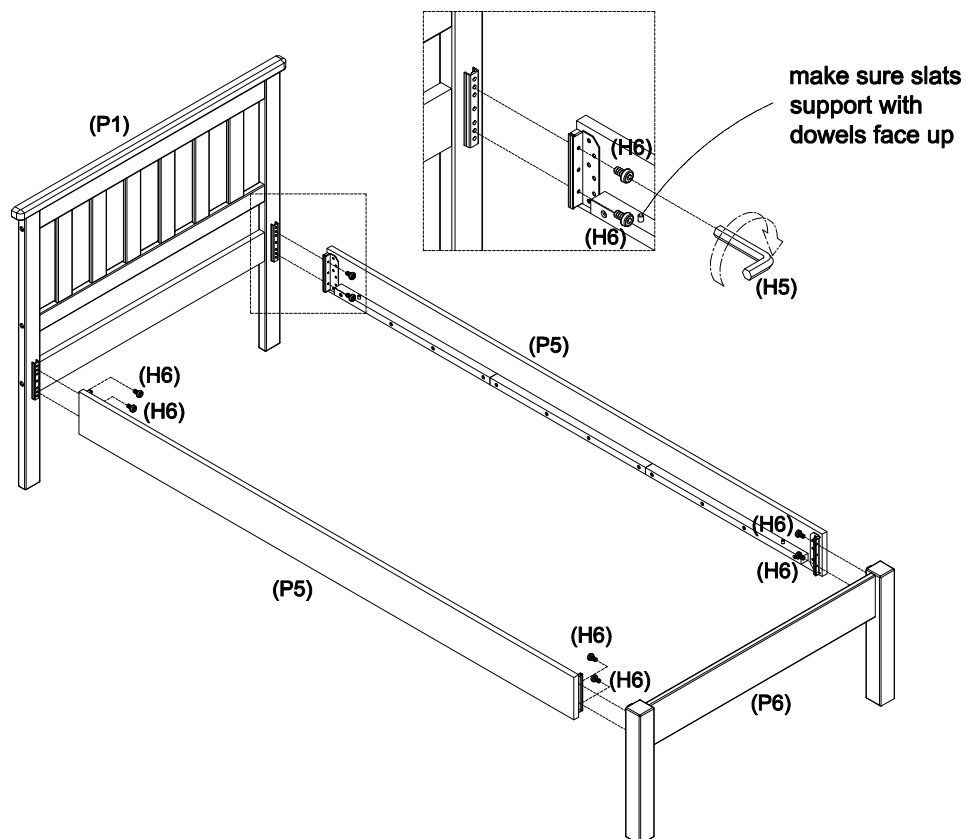


Connect the 2 x side rails (P5) to the headboard (P1) and footboard (P6), using an allen key (H5), turn 8 x small bolts (H6) clockwise to fix.


Step 4

You will need:

4 x Wood
Screws
(H1)




Phillips head
screwdriver

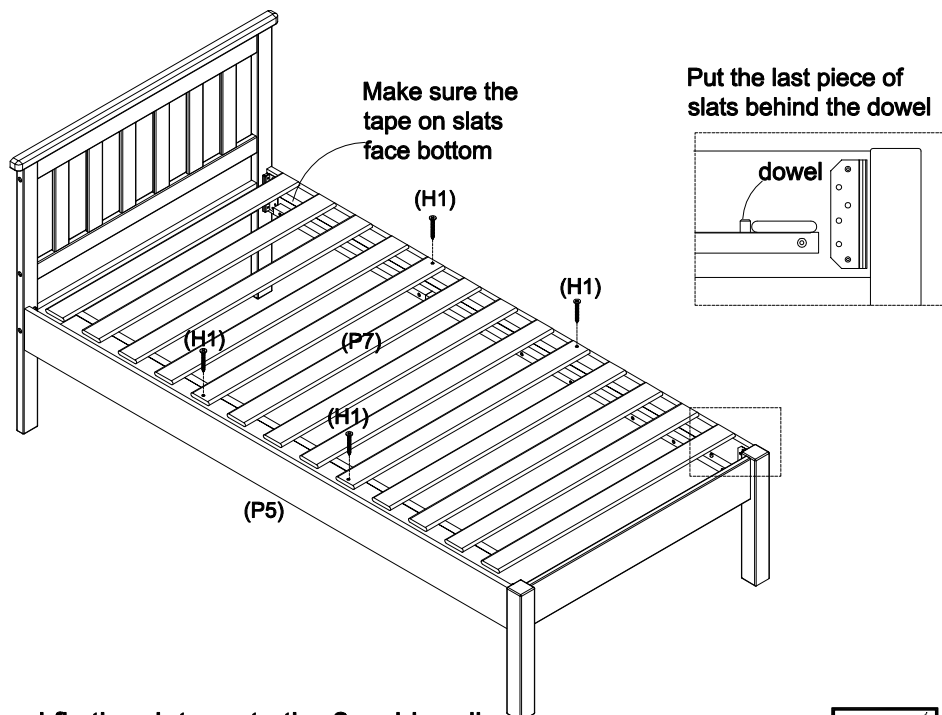

Put the slats (P7) on the bed, and fix the slats on to the 2 x side rails (P5) by using 4 x wood screws (H1) and a phillips head screwdriver.

www.fantasticfurniture.com.au

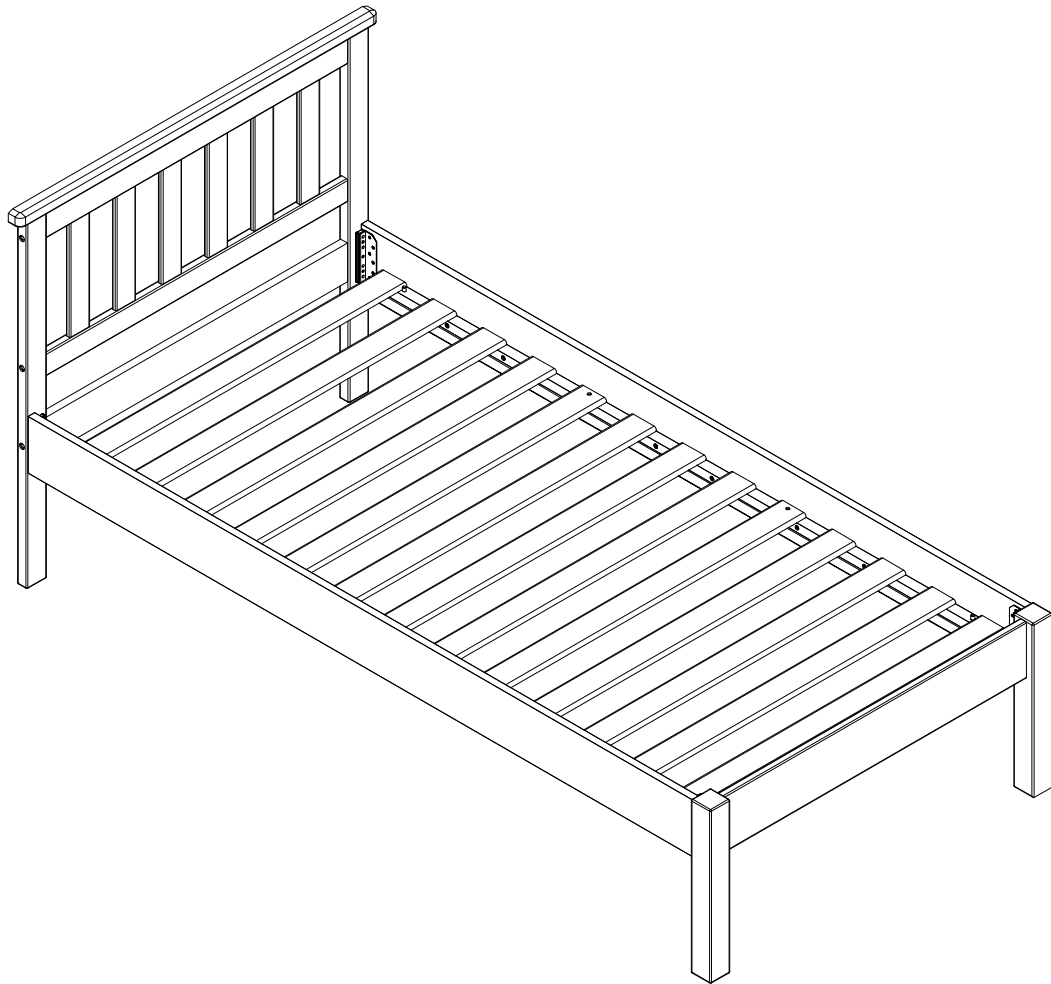


Job Complete!

In the interest of our environment
please dispose of all packing thoughtfully.



Version 1.0

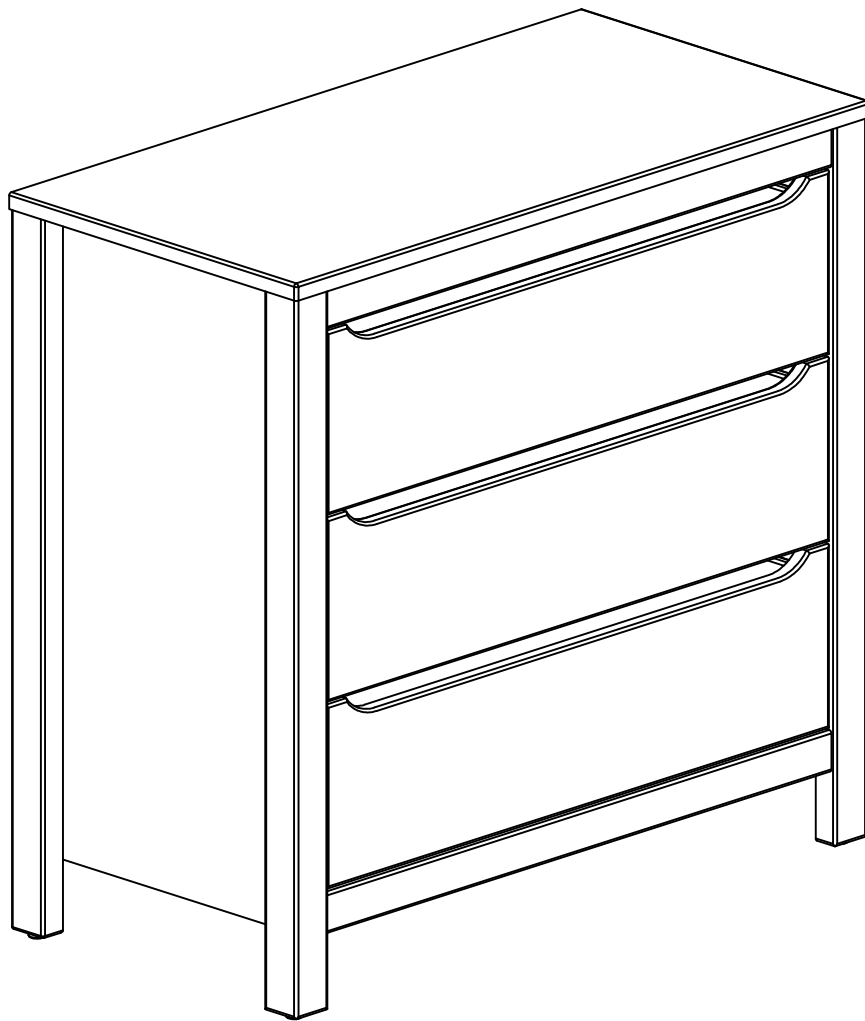

TWO PEOPLE



REQUIRED

Cooper

Lowboy 3 Drawer

www.fantasticfurniture.com.au



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been provided with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools.
Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What You Need

To Assemble the Product




















Other Tools You Need
Phillips Head Screwdriver

Part List

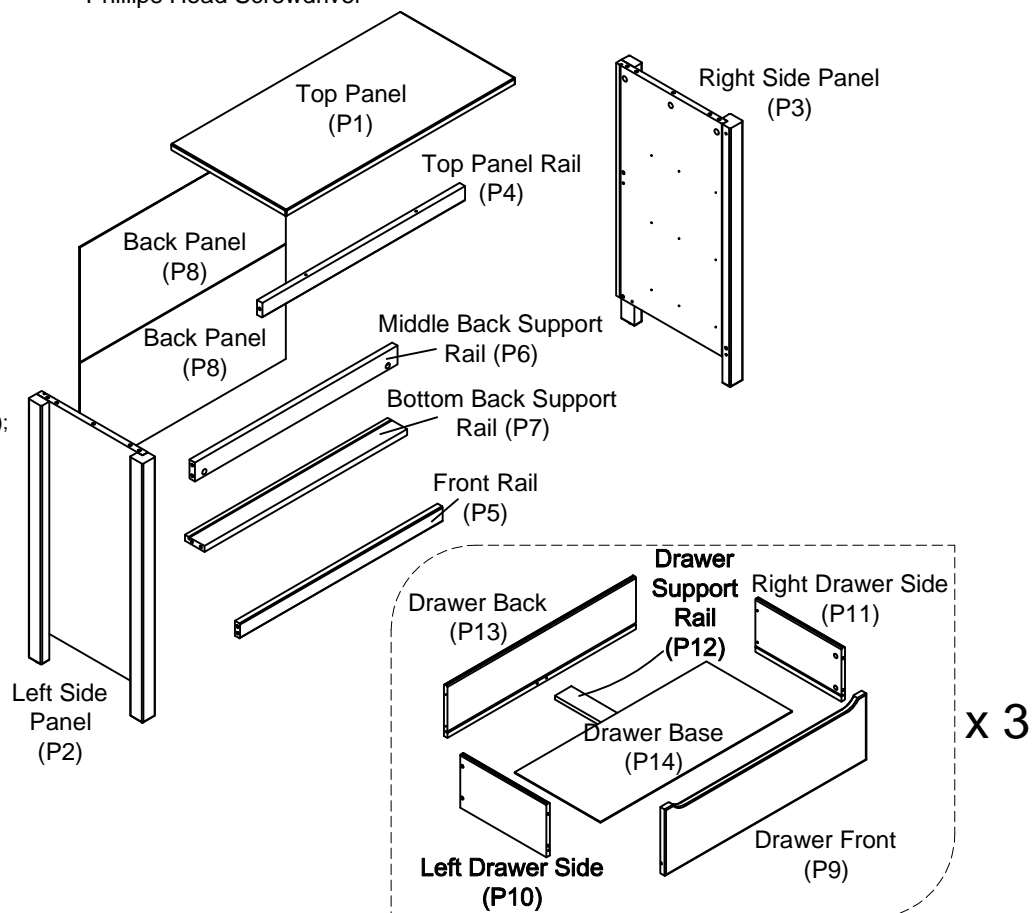
Box 1:


- 1 x Top Panel (P1);
- 1 x Left Side Panel (P2);
- 1 x Right Side Panel (P3);
- 1 x Top Panel Rail (P4);
- 1 x Front Rail (P5);
- 1 x Middle Back Support Rail (P6);
- 1 x Bottom Back Support Rail (P7);
- 2 x Back Panel (P8);
- 3 x Drawer Front (P9);
- 3 x Left Drawer Side (P10);
- 3 x Right Drawer Side (P11);
- 3 x Drawer Support Rail (P12);
- 3 x Drawer Back (P13);
- 3 x Drawer Base (P14);
- Hardware Pack



			 M3.5 x 25				
26 x Large Cam Bolts (H1)	26 x Large Cam Nuts (H2)	10 x Wooden Dowels (H3)	21 x Wood Screws (H4)	3 x Small Cam Bolts (H5)	3 x Small Cam Nuts (H6)	3 x Left Runner Track (H7)	3 x Right Runner Track (H8)
		 M3.5 x 15	 M3 x 15				 M3 x 20
3 x Left Runner (H9)	3 x Right Runner (H10)	36 x Wood Screws (H11)	3 x Wood Screws (H12)	1 x Wall Strap (H13)	2 x Washer (H14)	4 x Back Panel Support (H15)	4 x Wood Screws (H16)




Step 1


You will need	
	
6 x Wooden Dowels (H3)	

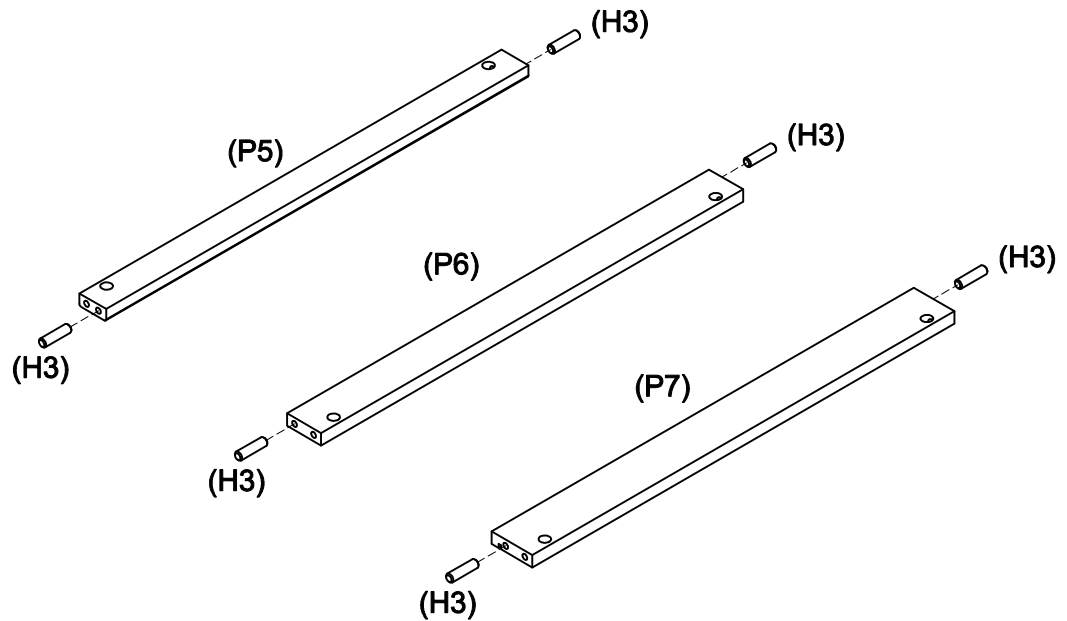

Insert 2 x wooden dowels (H3) into the front rail (P5).
 Insert 2 x wooden dowels (H3) into the middle back support rail (P6).
 Insert 2 x wooden dowels (H3) into the bottom back support rail (P7).




Step 2

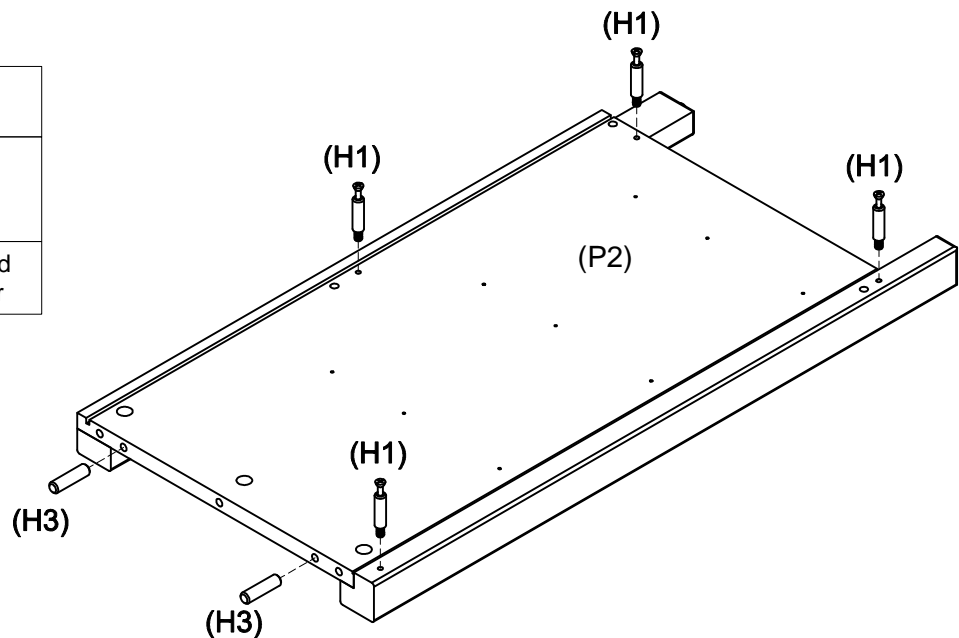
You will need	
	
4 x Large Cam Bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	



Fix 4 x large cam bolts (H1) to the left side panel (P2) by tightening with a phillips head screwdriver.
 Insert 2 x wooden dowels (H3) into the left side panel (P2).




Step 3

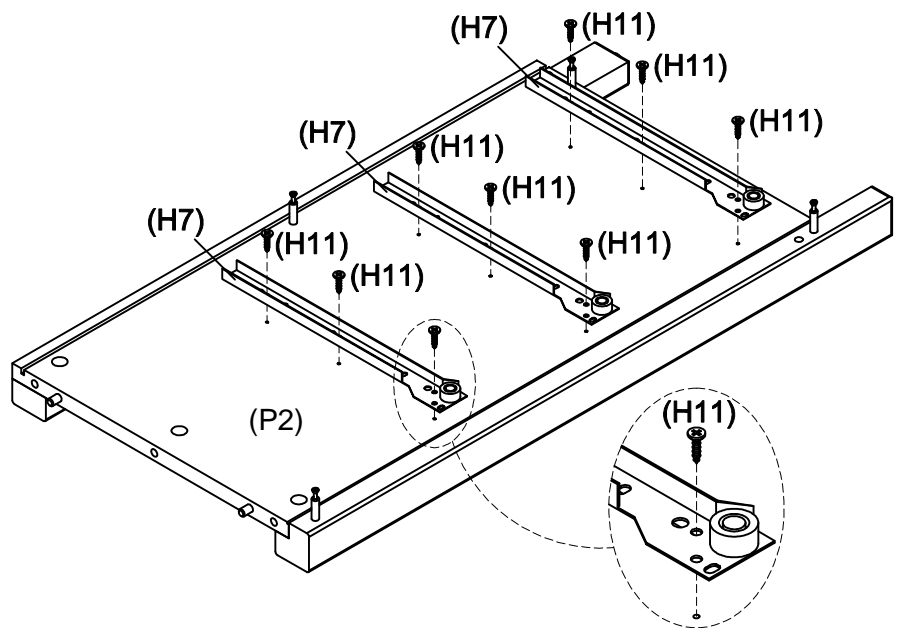
You will need	
	
3 x Left Runner Track (H7)	Phillips head screwdriver
	
9 x Wood Screws (H11)	



Fix 3 x left runner tracks (H7) to the left side panel (P2) with 9 x wood screws (H11) into the pre-drilled holes by tightening with a phillips head screwdriver.

Step 4

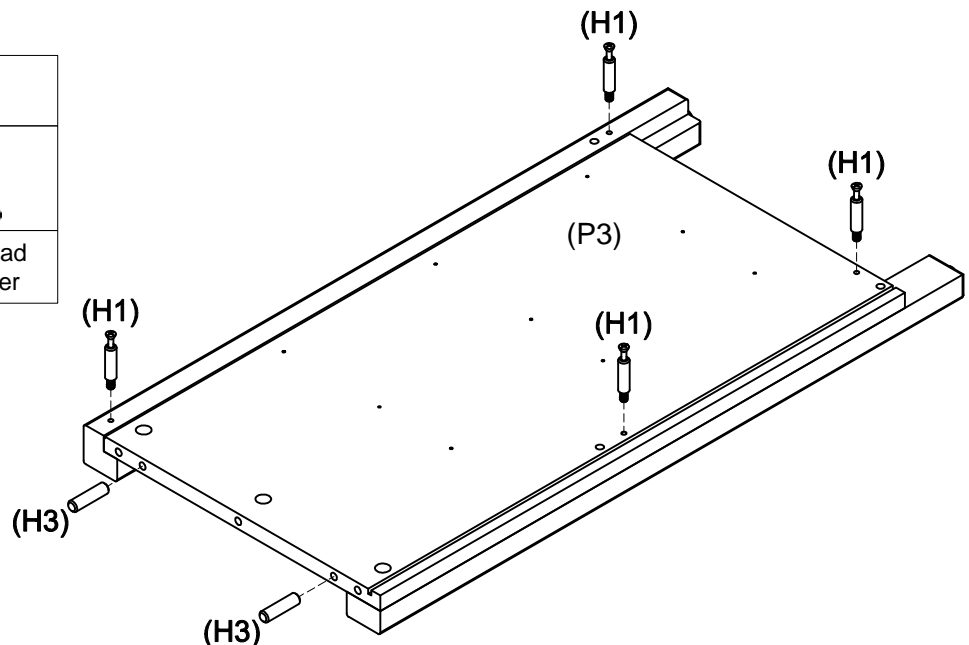


You will need	
	
4 x Large Cam bolts (H1)	Phillips head screwdriver
	
2 x Wooden Dowels (H3)	




Fix 4 x large cam bolts (H1) to the right side panel (P3) by tightening with a phillips head screwdriver.

Insert 2 x wooden dowels (H3) into the right side panel (P3).



Step 5



You will need	
	
3 x Right Runner Track (H8)	Phillips head screwdriver
	
9 x Wood Screws (H11)	

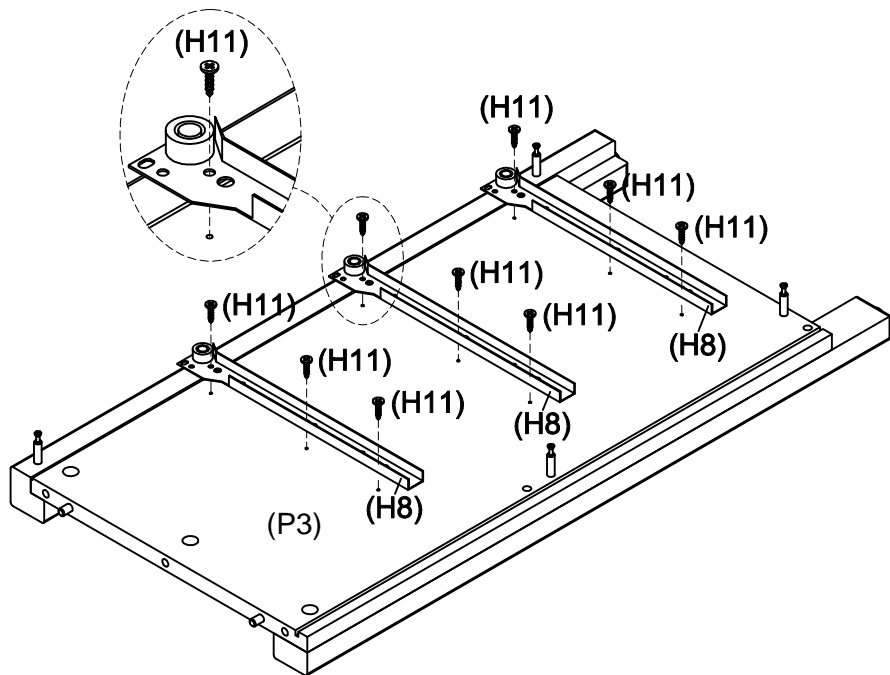

Fix 3 x right runner tracks (H8) to the right side panel (P3) with 9 x woodscrews (H11) into the pre-drilled holes by tightening with a phillips head screwdriver.

Step 6



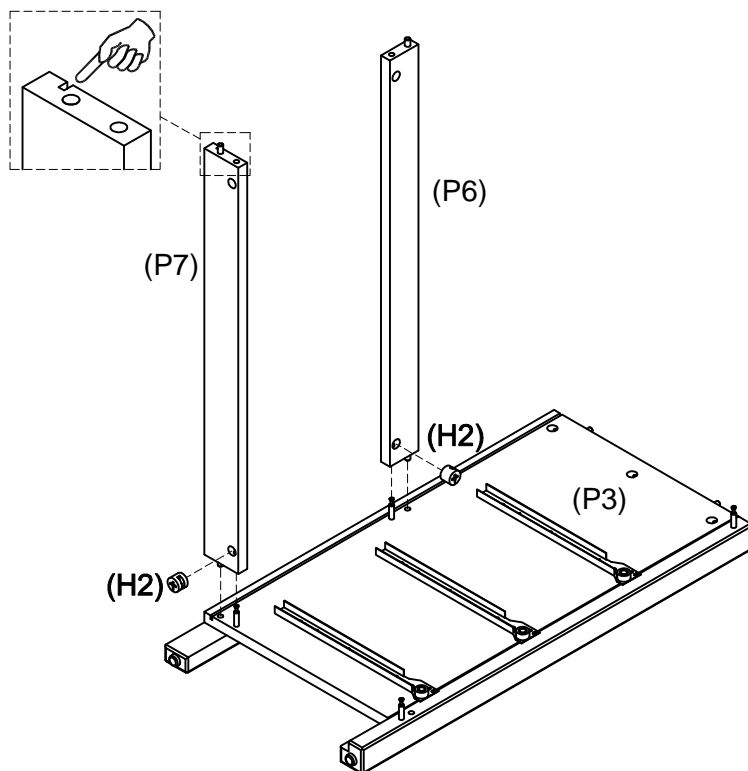You will need	
	
2 x Large Cam Nuts (H2)	Phillips head screwdriver





Insert large cam nuts (H2) into the back support rails (P6, P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).

To fix the back support rails (P6, P7) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).

Step 7



You will need	
	
2 x Large Cam Nuts (H2)	Phillips head screwdriver

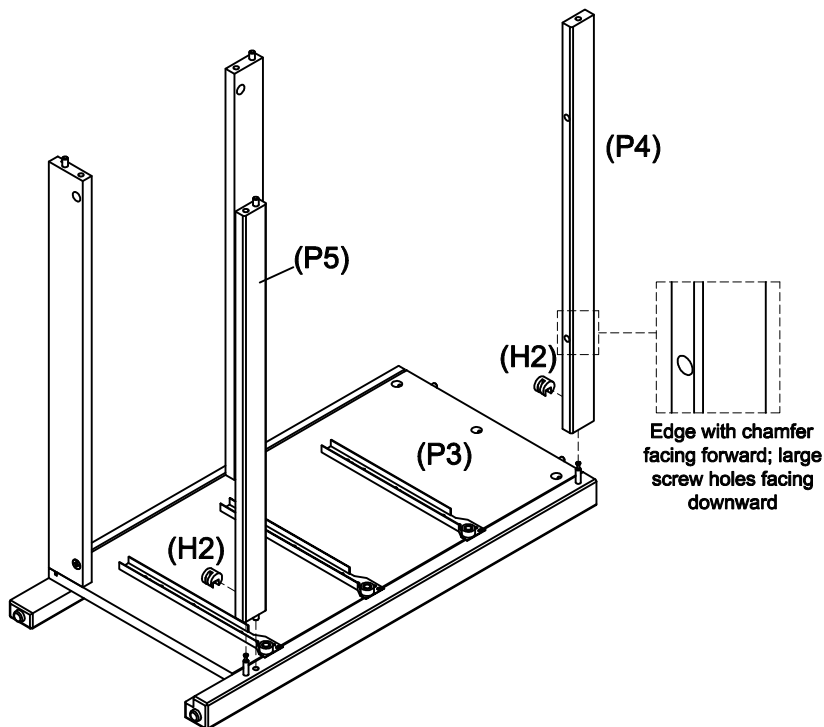



Insert large cam nuts (H2) into the top panel rail (P4) and the front rail (P5). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).

To fix the top panel rail (P4) and front rail (P5) to the right side panel (P3), use the phillips head screwdriver to tighten the cam nuts (H2).

Step 8


You will need	
	
4 x Large Cam Nuts (H2)	Phillips head screwdriver

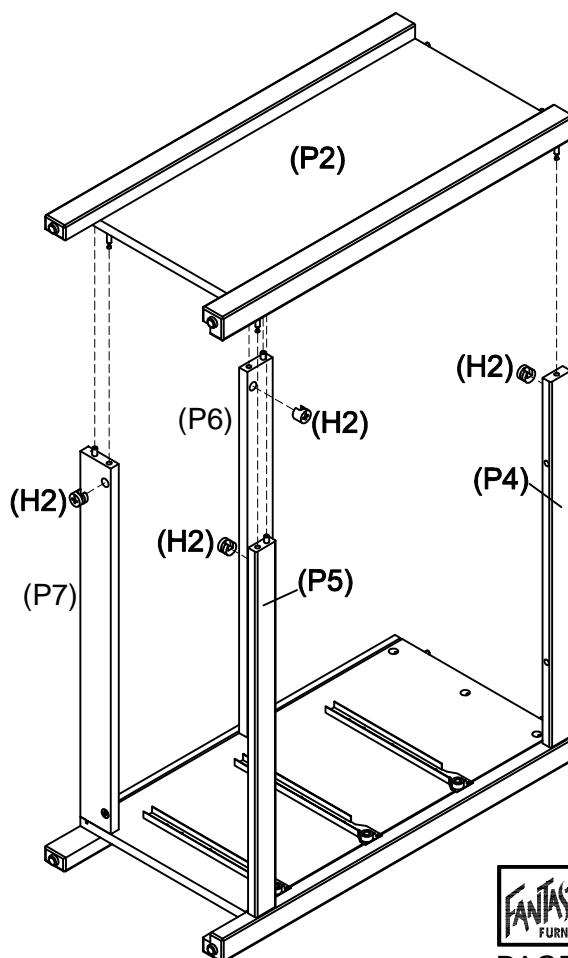

Insert large cam nuts (H2) into the top panel rail (P4), front rail (P5) and back support rail (P6, P7). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).



To fix the top panel rail (P4), front rail (P5) and back support rail (P6, P7) to the left side panel (P2), use the phillips head screwdriver to tighten the cam nuts (H2).


Step 9

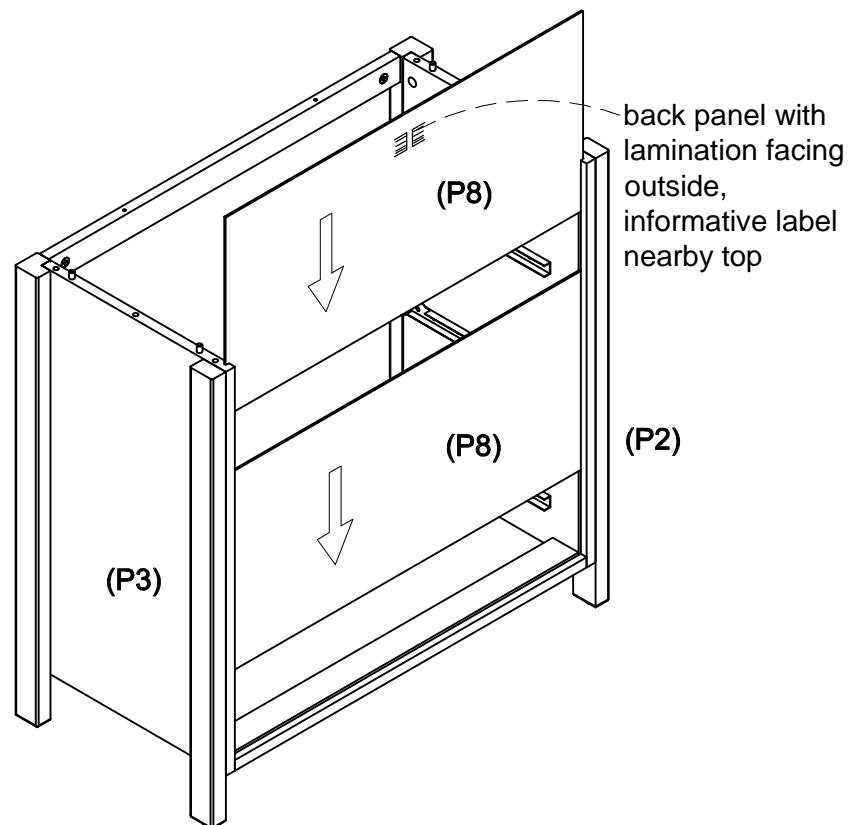

Turn the unit upright carefully, slip 2 x back panels (P8) into the grooves on the side panels (P2) & (P3).



Step 10


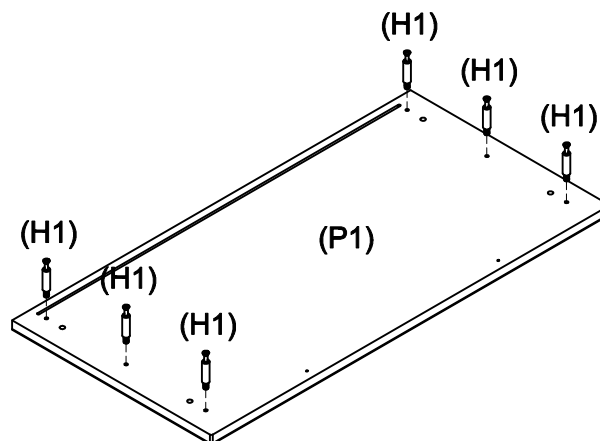
You will need	
	
6 x Large Cam bolts (H1)	Phillips head screwdriver



Fix 6 x large cam bolts (H1) to the top panel (P1) by tightening with a Phillips head screwdriver.



Step 11


You will need	
	
6 x Large Cam Nuts (H2)	Phillips head screwdriver

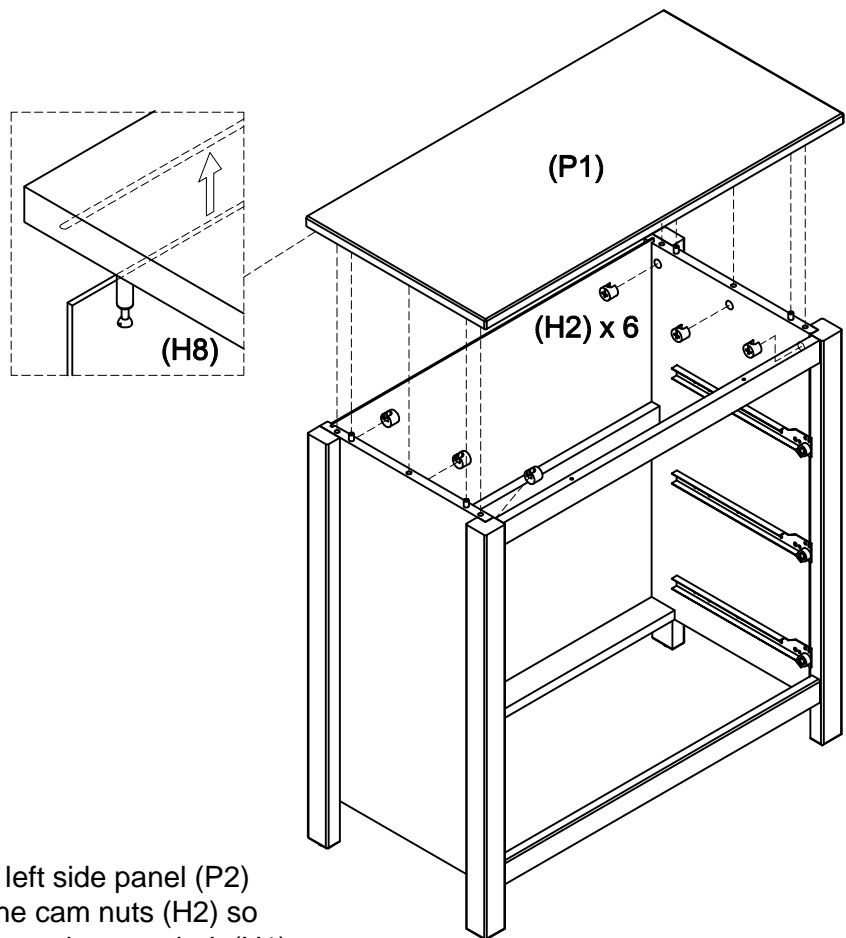

Insert large cam nuts (H2) into the left side panel (P2) and right side panel (P3). Rotate the cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1). To fix the left side panel (P2) and right side panel (P3) to the top panel (P1), use the phillips head screwdriver to tighten the cam nuts (H2).





Step 12

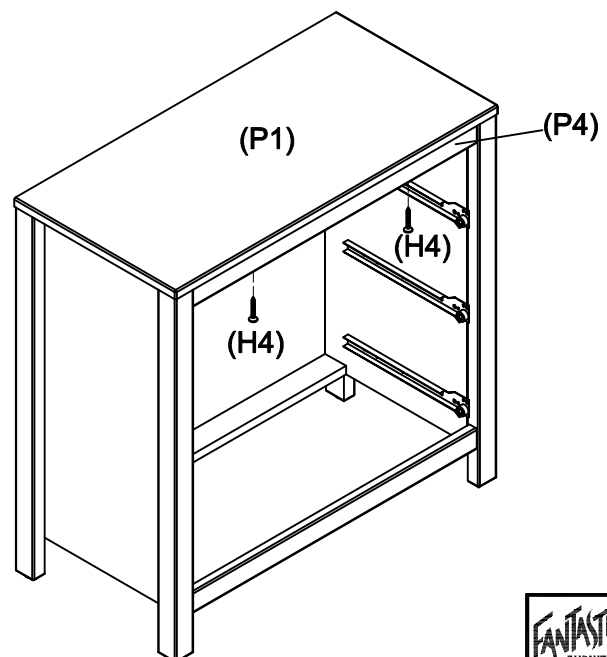
You will need	
	
2 x Wood Screws (H4)	Phillips head screwdriver



Fix the top panel rail (P4) to the top panel (P1) with 2 x wood screws (H4) by tightening with a phillips head screwdriver.

Step 13


You will need	
	
3 x Wood Screws (H12)	Phillips head screwdriver
	
4 x Back Panel Support (H15)	4 x Wood Screws (H16)

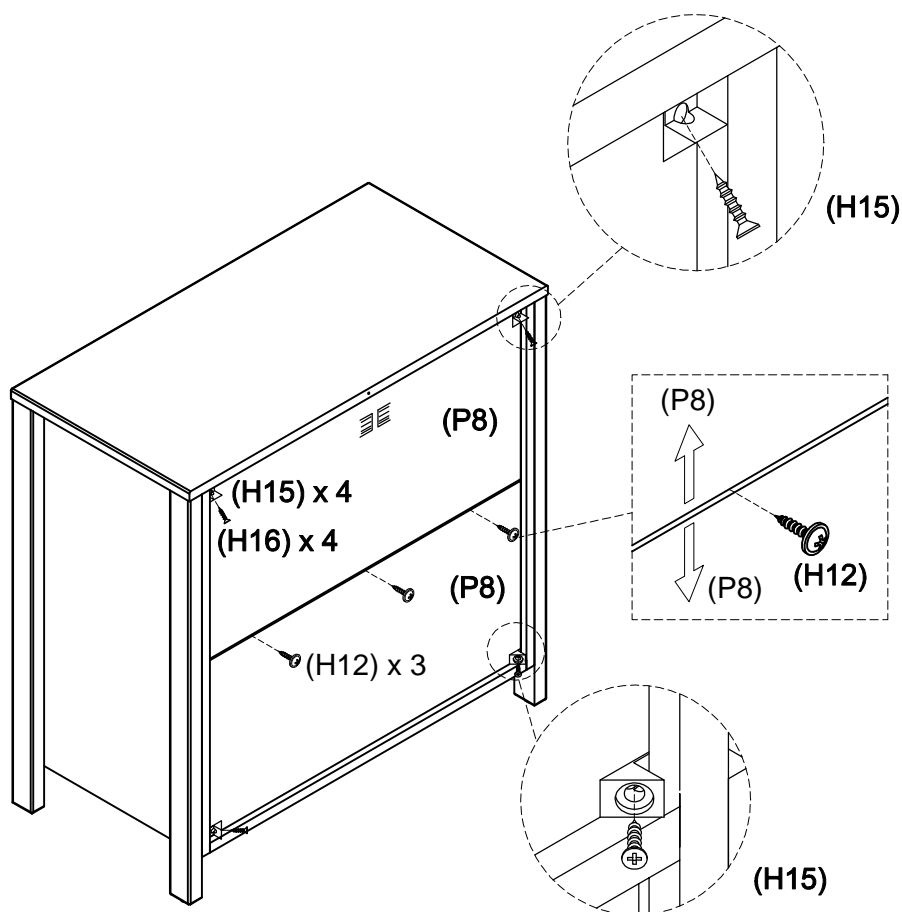


Fix the back panels (P8) to back support rail (P6) with 3 x wood screws (H12) by tightening with a phillips head screwdriver.

Fix 4 x back panel supports (H15) to each corner on the back with wood screws (H16) by tightening with a phillips head screwdriver.

Step 14

You will need	
	
12 x Large Cam bolts (H1)	Phillips head screwdriver
	
3 x Small Cam Bolts (H5)	

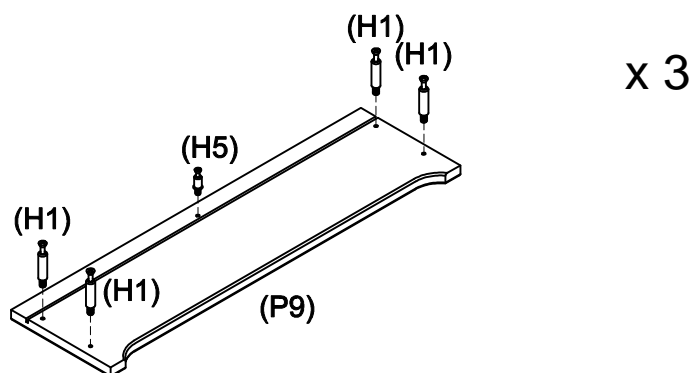





Fix 4 x large cam bolts (H1) and 1 x small cam bolts (H5) to the drawer front panel (P9) by tightening with a phillips head screwdriver.

Repeat steps for the other two drawer front panels.

Step 15

x 3

You will need	
	
12 x Large Cam Nuts (H2)	Phillips head screwdriver

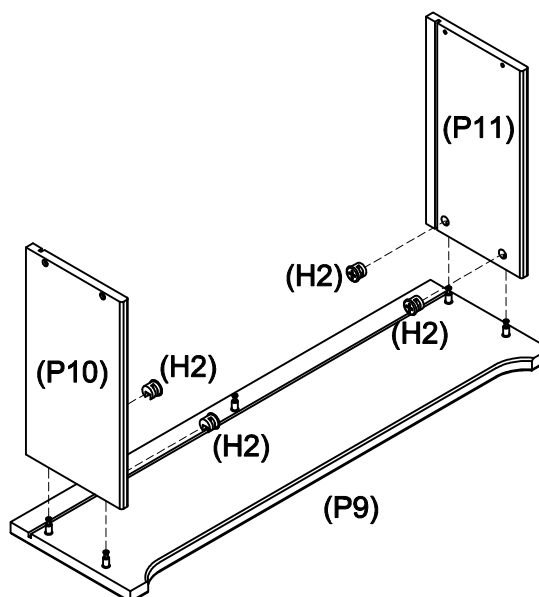



Insert large cam nuts (H2) into the left and right drawer sides (P10 & P11), rotate the large cam nuts (H2) so the arrow is pointing towards the incoming cam bolt (H1).



To secure the left and right drawer sides (P10 & P11) to the drawer front (P9), use the phillips head screwdriver to tighten the large cam nuts (H2).

Repeat steps for the other two drawers.

Step 16

x 3

You will need	
	
3 x Small Cam Nuts (H6)	Phillips head screwdriver

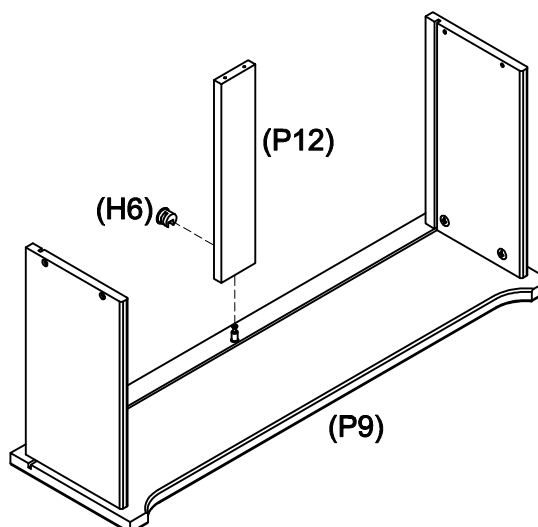


Insert small cam nuts (H6) into the drawer support rail (P12), rotate the small cam nuts (H6) so the arrow is pointing towards the incoming cam bolt (H5).

To secure the drawer support rail (P12) to the drawer front (P9), use the phillips head screwdriver to tighten the small cam nuts (H6).

Repeat steps for the other two drawers.

Step 17

x 3

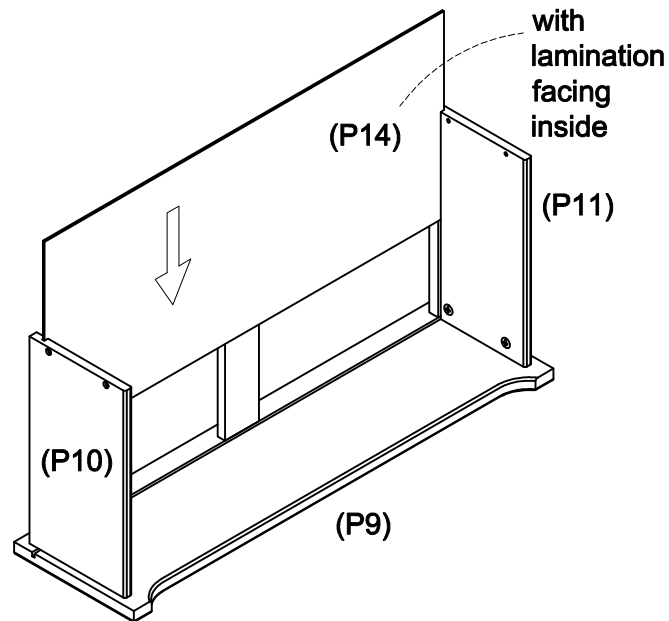



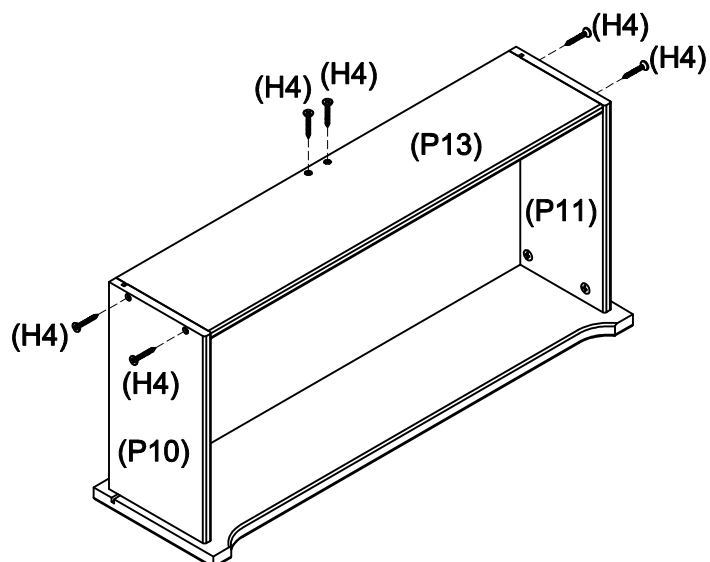
Slide the drawer base (P14) into the grooves of the drawer sides (P10 & P11) and the drawer front (P9).

Repeat steps for the other two drawers.

Step 18

x 3

You will need	
	
18 x Wood Screws (H4)	Phillips head screwdriver








Use wood screws (H4) to fix the drawer back (P13) to drawer sides (P10 & P11) and the drawer support rail (P12), by tightening with the phillips head screwdriver.

Repeat steps for the other two drawers.

Step 19



x 3

You will need	
	
18 x Wood Screws (H11)	Phillips head screwdriver
	
3 x Left Runner (H9)	3 x Right Runner (H10)

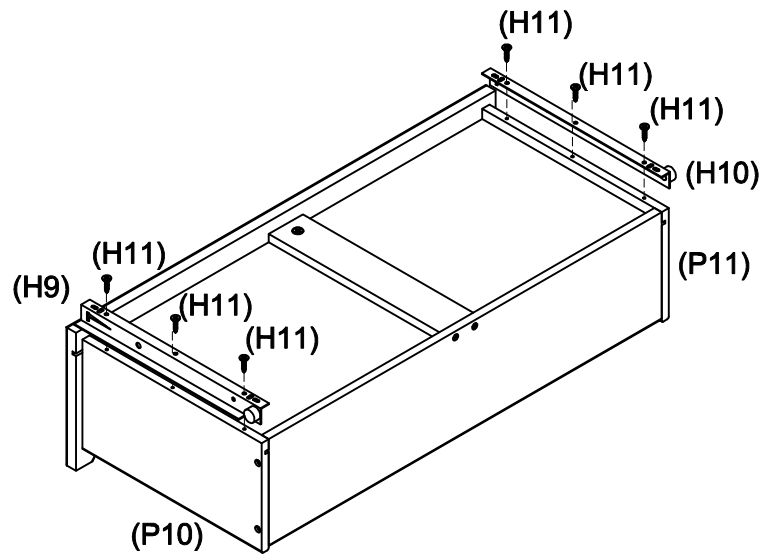

Fix the left runner (H9) to the left drawer side (P10) and the right runner (H10) to the right drawer side (P11) with wood screws (H11) by tightening with the phillips head screwdriver. Repeat steps for the other two drawers.

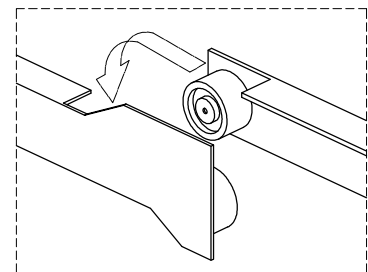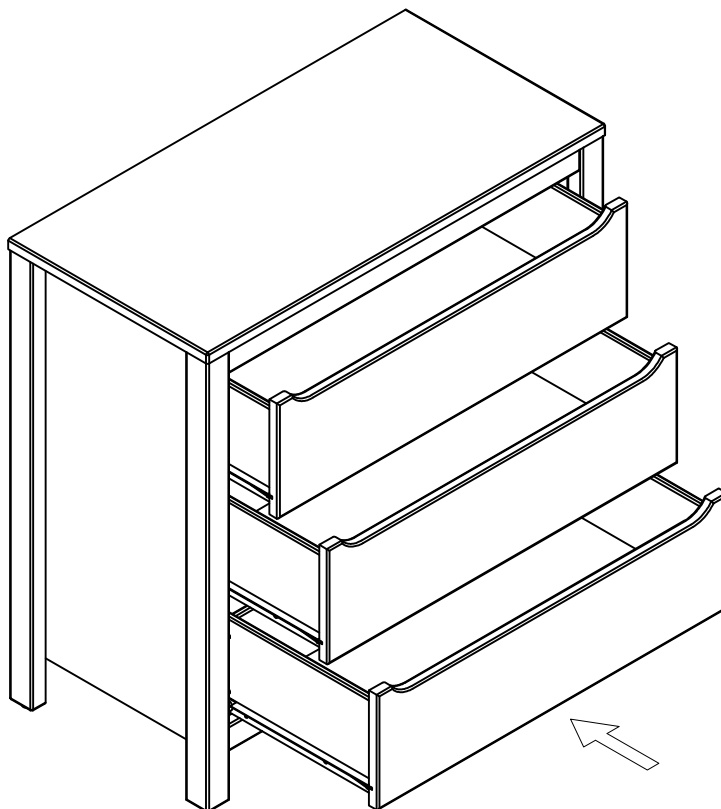



Step 20




Carefully slide the drawers into the lowboy.

www.fantasticfurniture.com.au


Step 21

You will need	
	
1 x Wood Screws (H4)	Phillips head screwdriver
	
1 x Wall Strap (H13)	1 x Washer (H14)

We strongly advise that you use the wall safety strap provided to prevent the unit toppling.

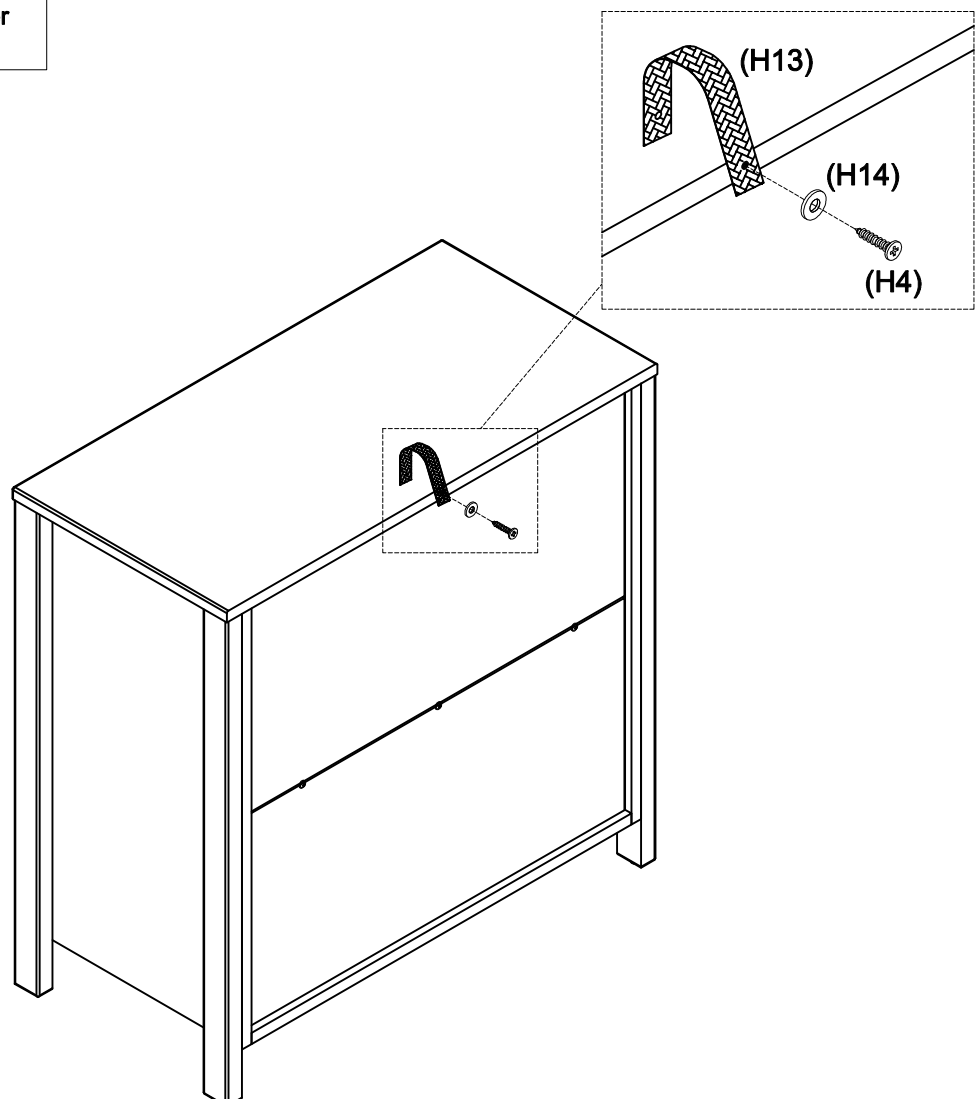

Fix the wall strap (H13) to the back of the top panel (P1) with a wood screw (H4) and sasher (H14) by tightening with the phillips head screwdriver.
Seek professional advice for how to attach the other end of the wall strap to your wall.

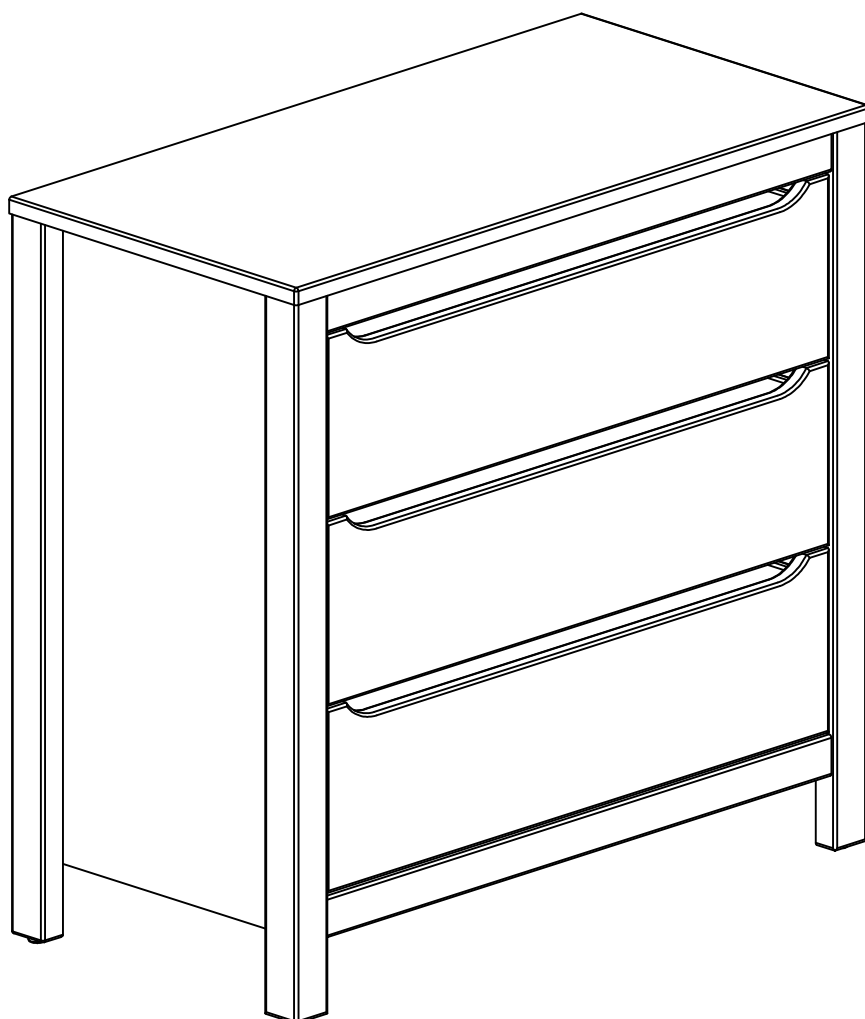

Job Complete!

In the interest of our environment
please dispose of all packing thoughtfully.