




**Fantastic
Furniture**

Version 1.0

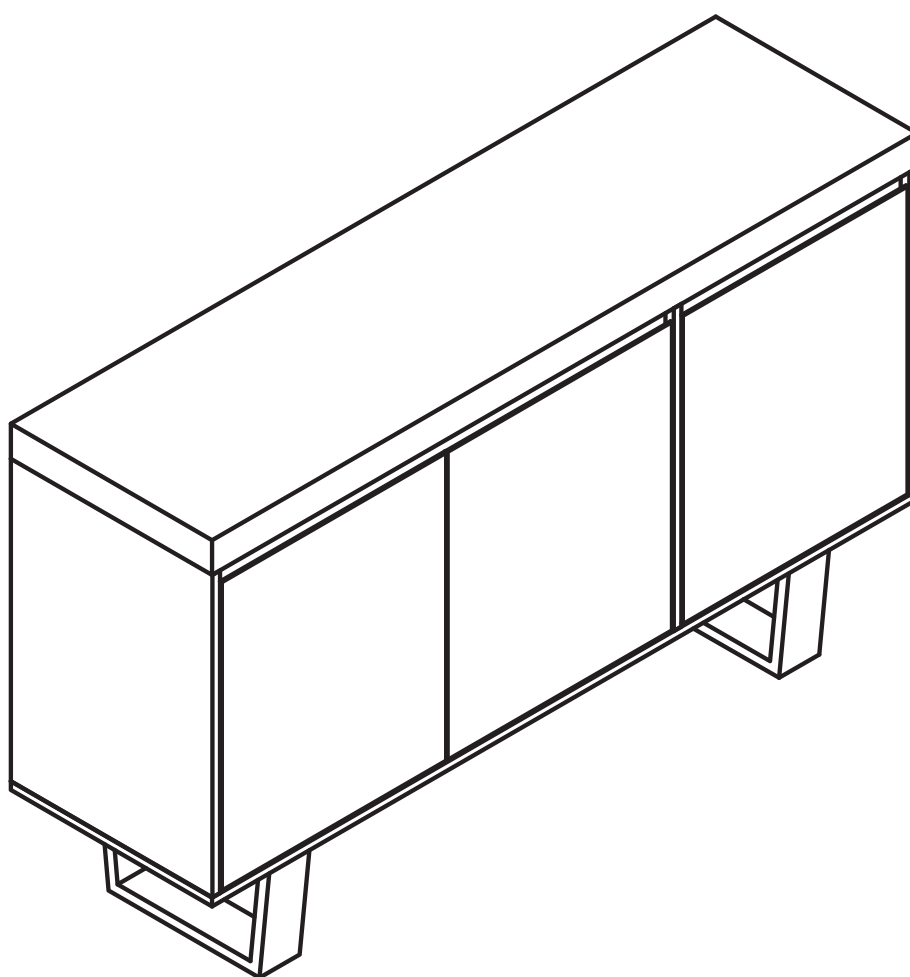

Bridge

Buffet

fantasticfurniture.com.au



Warning: Ensure the wall strap is attached to avoid serious injury.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

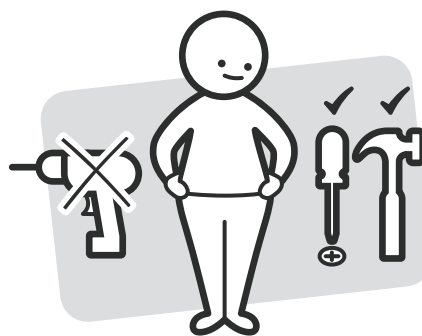

Make sure you have all the required tools. Never use power tools unless instructed.

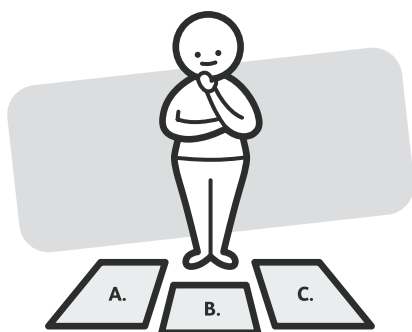

Identify and lay out all of the components before you begin assembly.

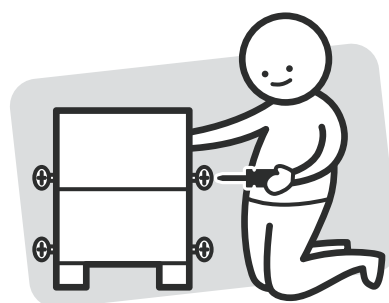

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE




Other tools you need:
Phillips head screwdriver;
Hammer

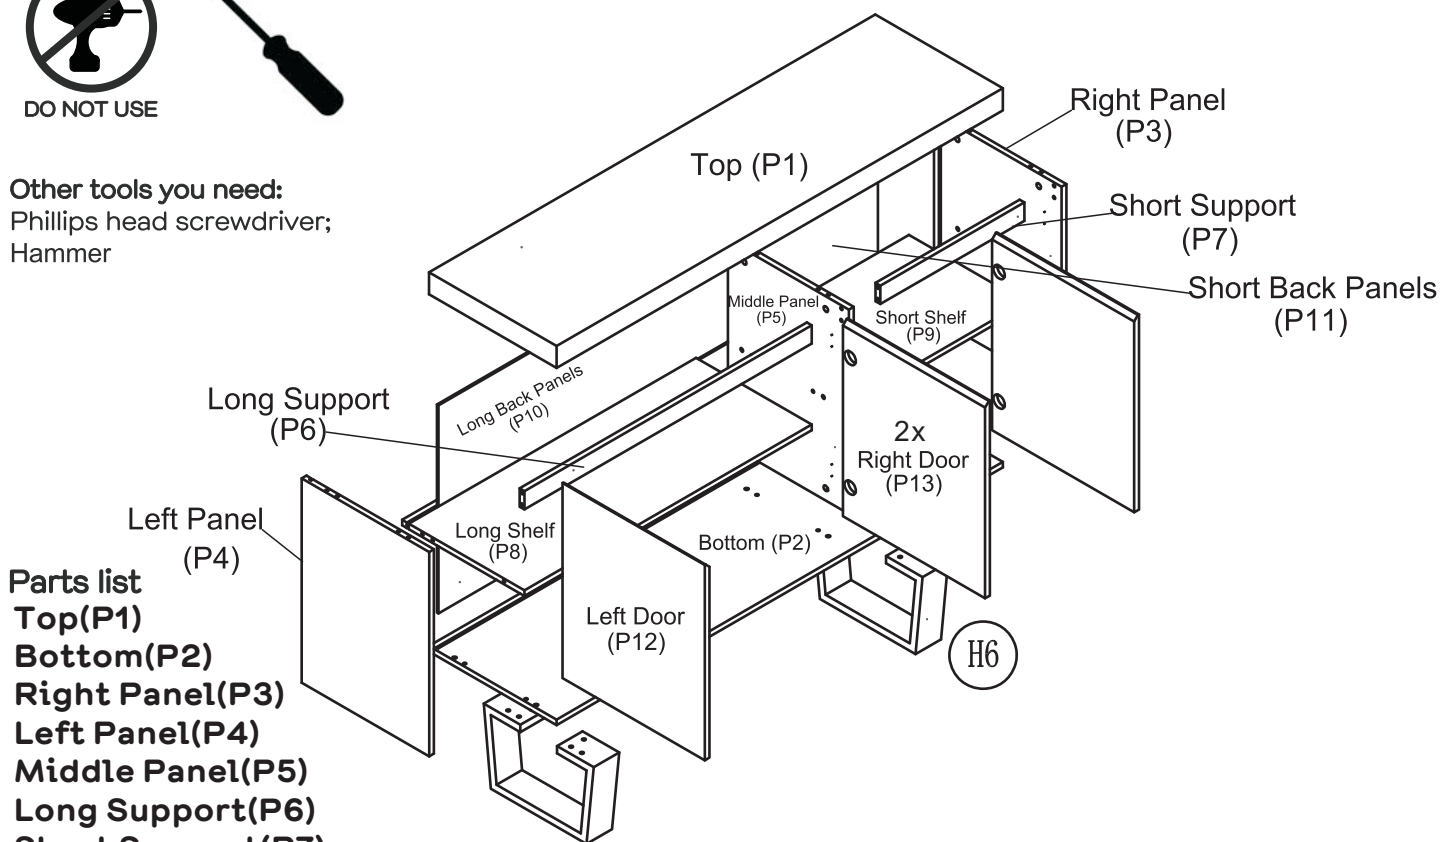

Parts list


- Top(P1)**
- Bottom(P2)**
- Right Panel(P3)**
- Left Panel(P4)**
- Middle Panel(P5)**
- Long Support(P6)**
- Short Support(P7)**
- Long Shelf(P8)**
- Short Shelf(P9)**
- 2 x Long Back Panels(P10)**
- Short Back Panel(P11)**
- Left Door(P12)**
- 2 x Right Door(P13)**

Hardware Pack

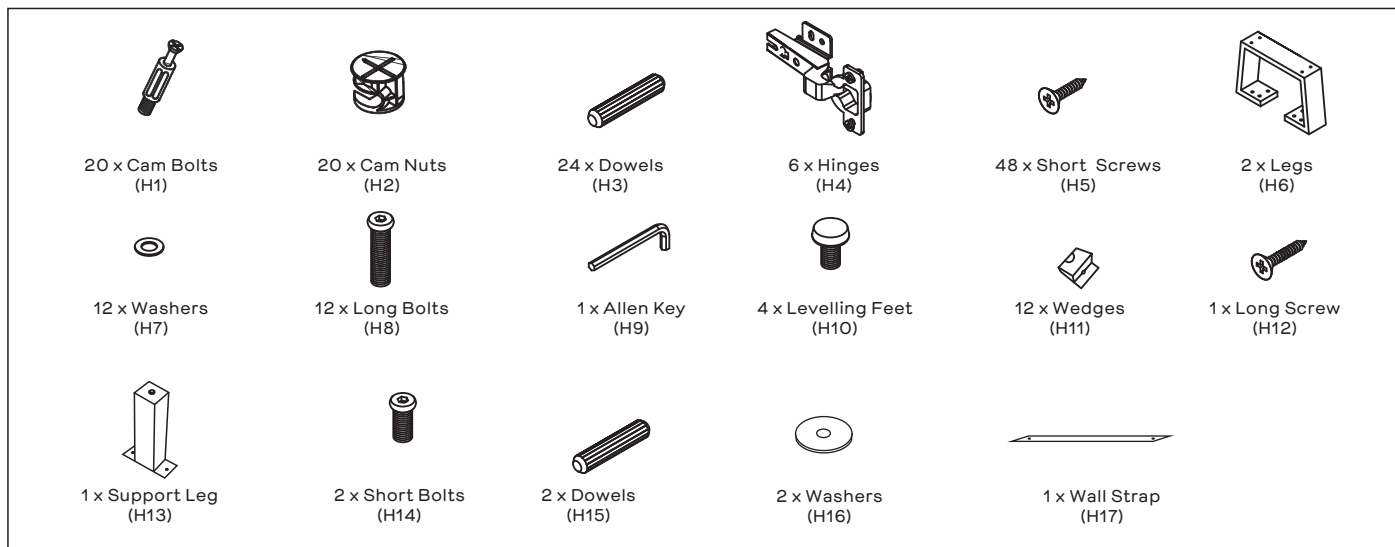




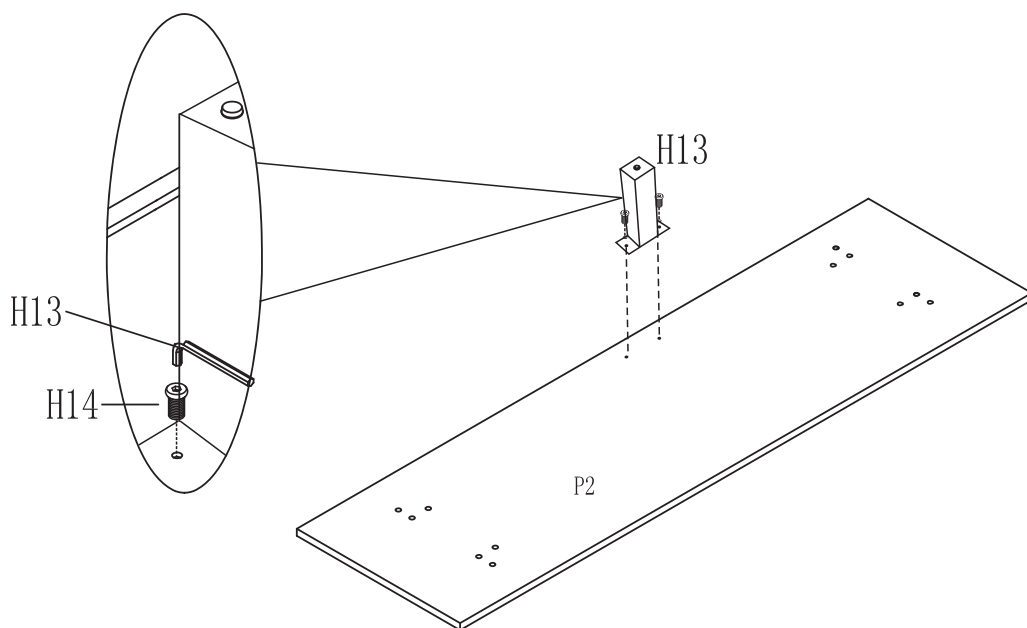

Step 1


You will need:	
	
1 x Support Leg (H13)	2 x Short Bolts (H14)
	
1 x Allen Key (H9)	



Using 2 x Short Bolts(H14) secure the Support Leg(H13) to the Unit Bottom(P2) by tightening with Allen Key(H9).

Step 2


You will need:	
	
2 x Legs (H6)	12 x Washers (H7)
	
12 x Long Bolts (H8)	1 x Allen Key (H9)
	
4 x Levelling Feet (H10)	

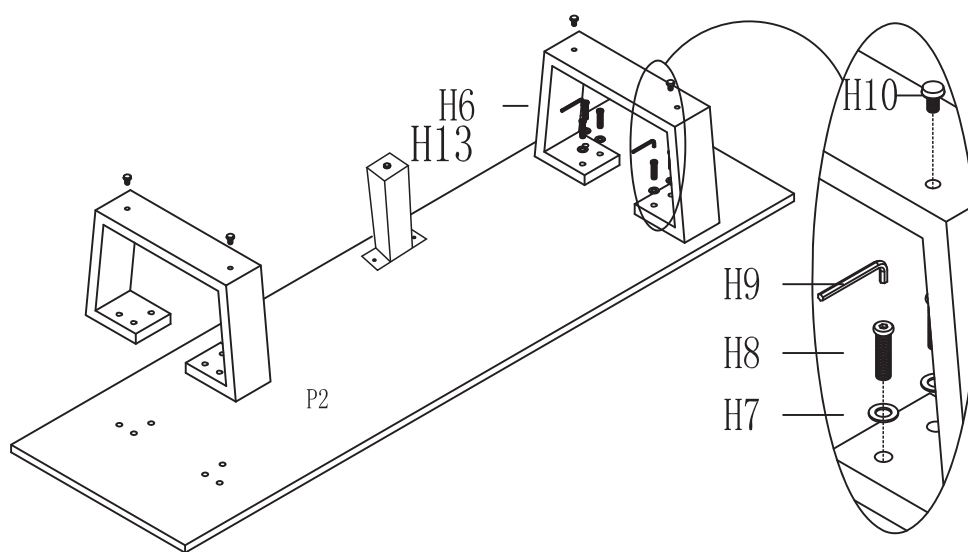

Using 6 x Washers(H7) and 6 x Long Bolts(H8) secure the Table Leg(H6) to the Unit Bottom(P2) by tightening with Allen Key(H9)
 Repeat the previous step to attach the second Table Leg(H6).
 Screw in 4 x Levelling Feet(H10) to the bottom of the Table Legs(H6)
 Ensure the Levelling Feet are screwed in firmly.If your flooring surface is uneven adjust the Levelling Feet accordingly.

Step 3


You will need:	
	
6 x Cam Bolts (H1)	6 x Dowels (H3)
	
Phillips Head Screwdriver	

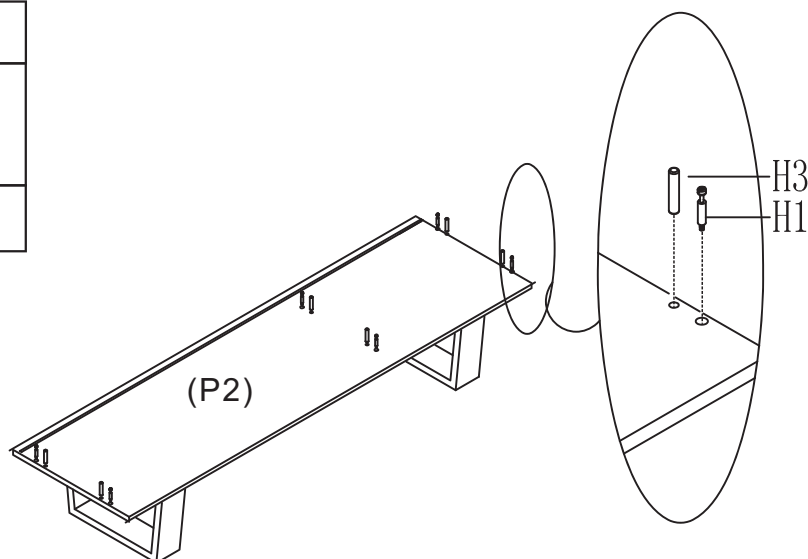

Insert 6 x Dowels(H3) into Unit Bottom(P2) and secure 6 x Cam Bolts(H1) to Unit Bottom(P2) by tightening with the Phillips Head Screwdriver.

Step 4

You will need:	
	
6 x Cam Bolts (H1)	6 x Dowels (H3)
	
Phillips Head Screwdriver	

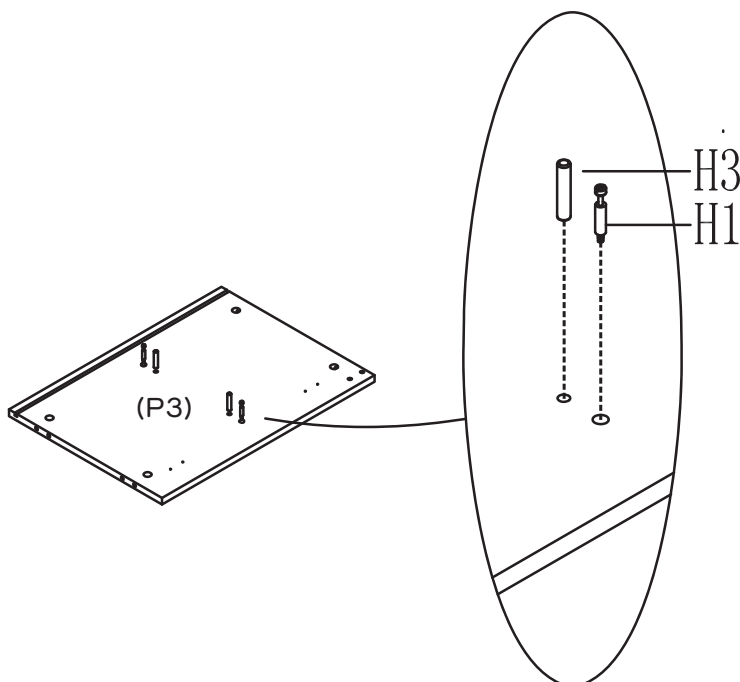

Insert 2 x Dowels(H3) into Middle Right Panel(P3) and secure 2 x Cam Bolts(H1) to Middle Right Panel(P3) by tightening with the Phillips Head Screwdriver. Repeat previous step for Left Panel (P4) and Middle Panel(P5).

Step 5

You will need:



2 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the bolt
goes into the wide
mouth of the cam nut.
You then turn the nut
so the narrow part
closes over the bolt.

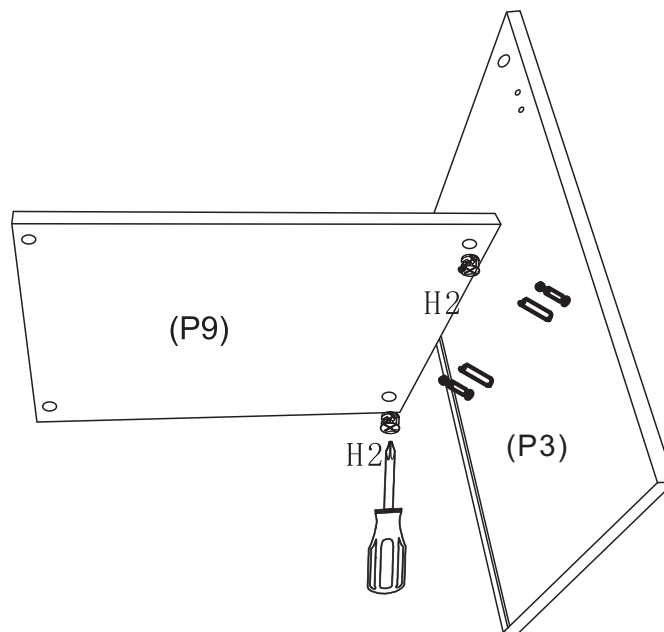

Insert 2 x Cam Nuts(H2) into Short Shelf(P9) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.


Attach Short Shelf(P9) to Right Panel(P3) by tightening the cam nuts(H2) with the Phillips Head Screwdriver

Step 6

You will need:



2 x Dowels
(H3)

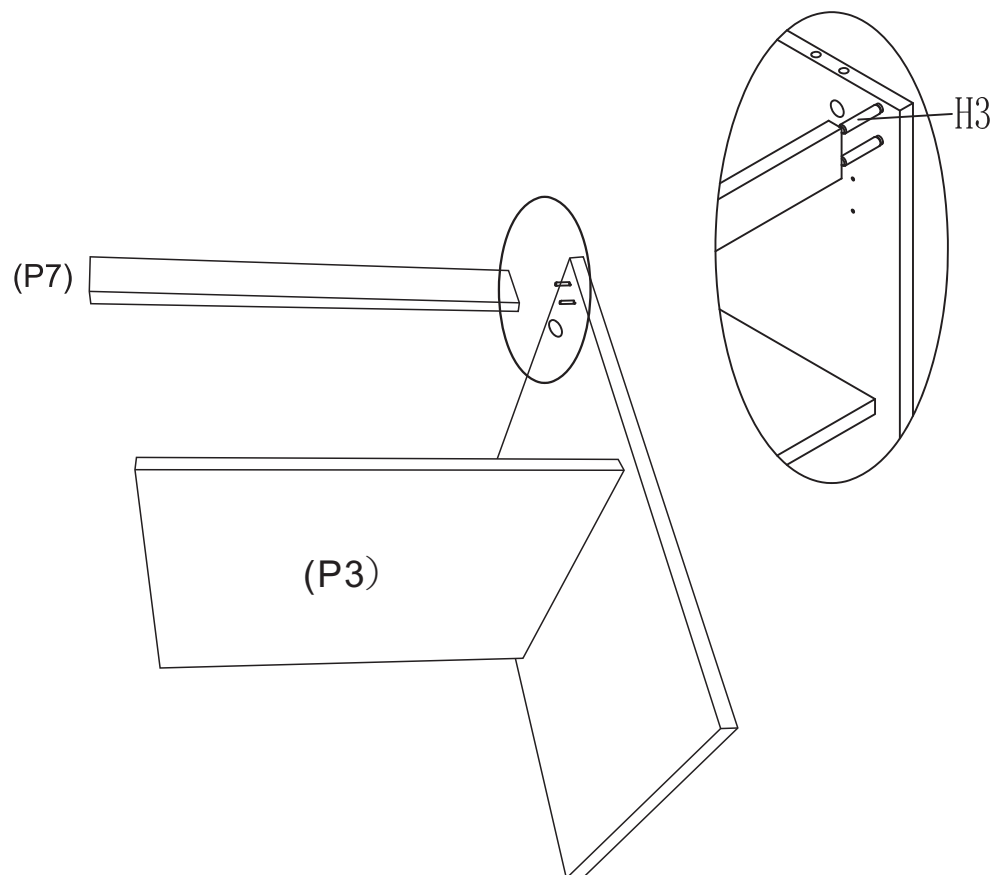

Insert 2 x Dowels(H3) into Right Panel(P3) and connect Short Support(P7) to Right Panel(P3).

Step 7

You will need:



2 x Dowels
(H15)



2 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

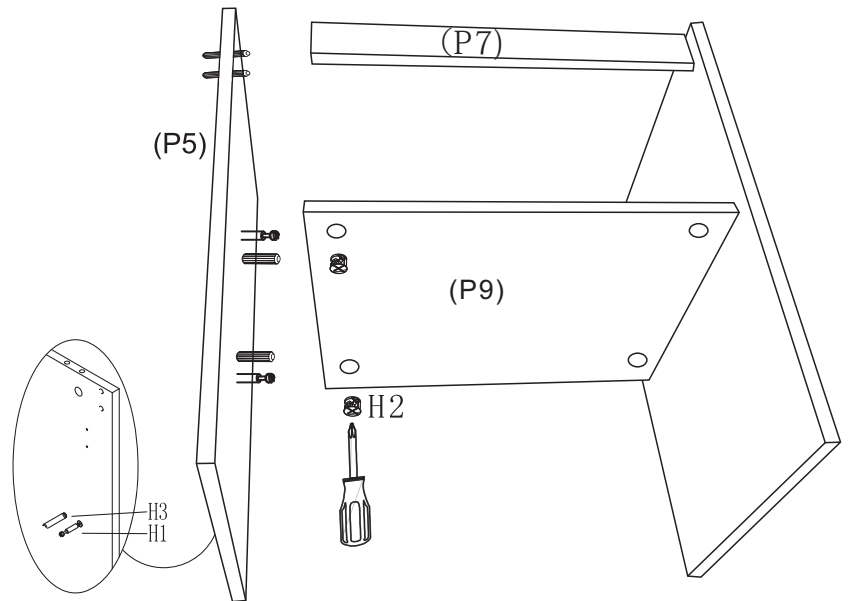

Insert 2 x Dowels(H15) into Middle Panel(P5)

Insert 2 x Cam Nuts(H2) into Short Shelf(P9) as shown.

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Short Shelf(P9) to Middle Panel(P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

Step 8

You will need:



2 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

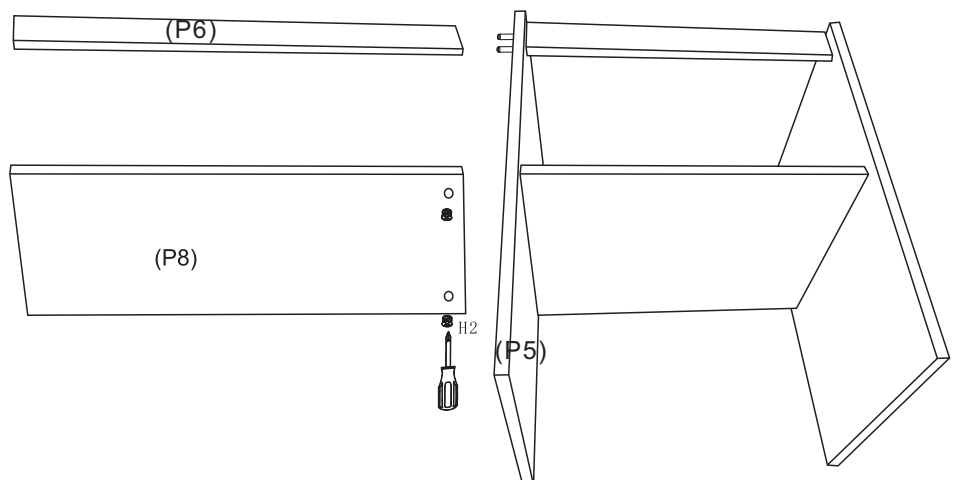


Connect Long Support(P6) to Middle Panel(P5) by Dowels(H15).

Insert 2 x Cam Nuts(H2) into Long Shelf(P8) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Long Shelf(P8) to Middle Panel(P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver


Step 9

You will need:	
	
2 x Cam Nuts (H2)	2 x Dowels (H3)
	
Phillips Head Screwdriver	

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

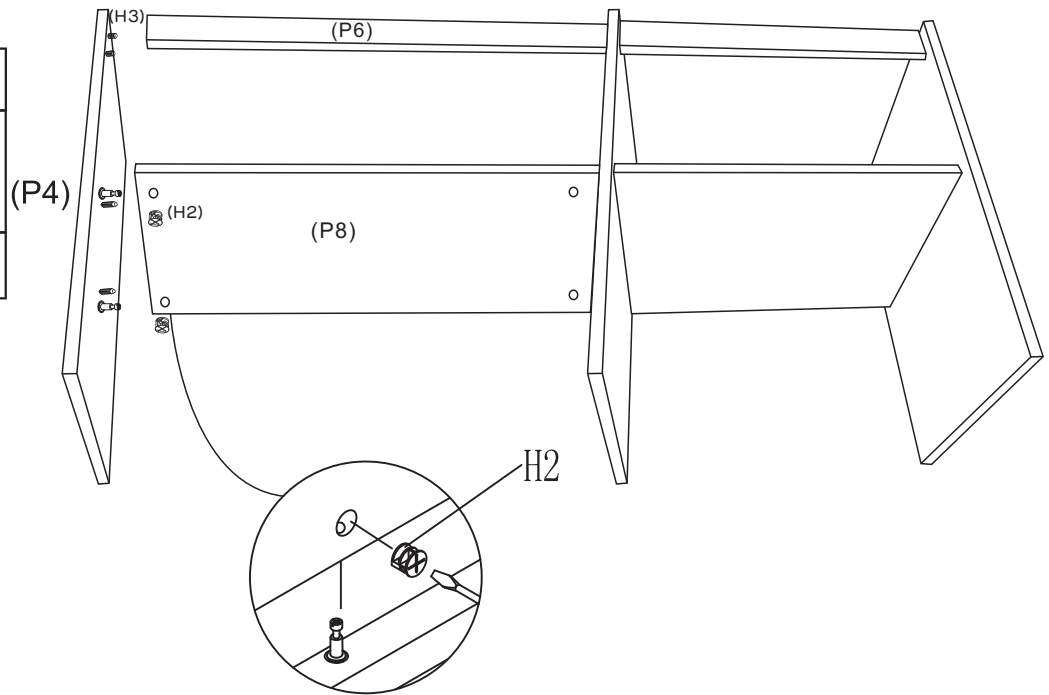



Insert 2 x Dowels(H3) into Left Panel(P4) to connect with Long Support(P6). Insert 4 x Cam Nuts(H2) into Long Shelf(P8) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Long Shelf(P8) to Left Panel(P4) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

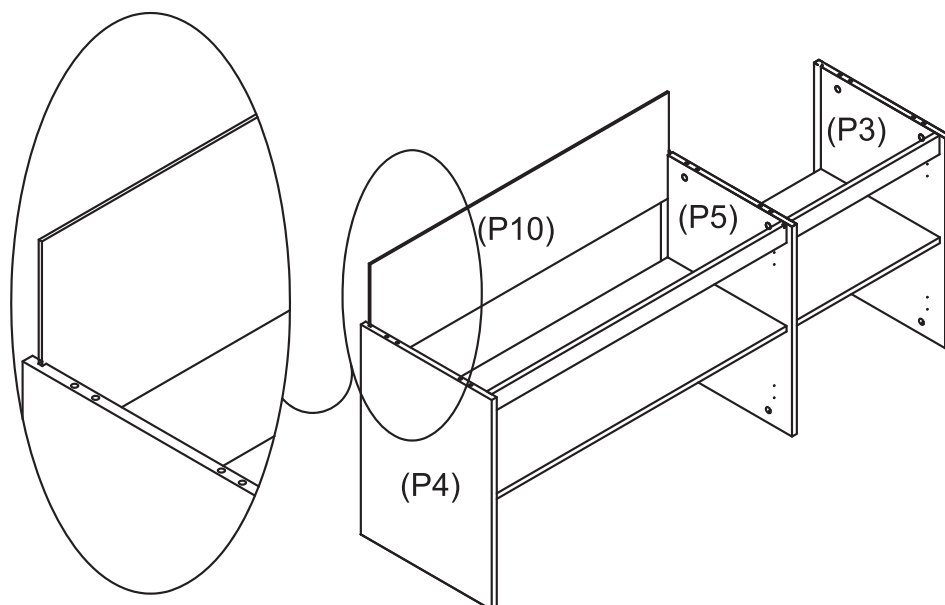
Step 10



Turn over the Buffet
Slide Long Back Panel(P10) into the groove of Left Panel(P4) and Middle Panel(P5) as shown.

Step 11

You will need:	
	
6 x Cam Bolts (H1)	6 x Dowels (H3)

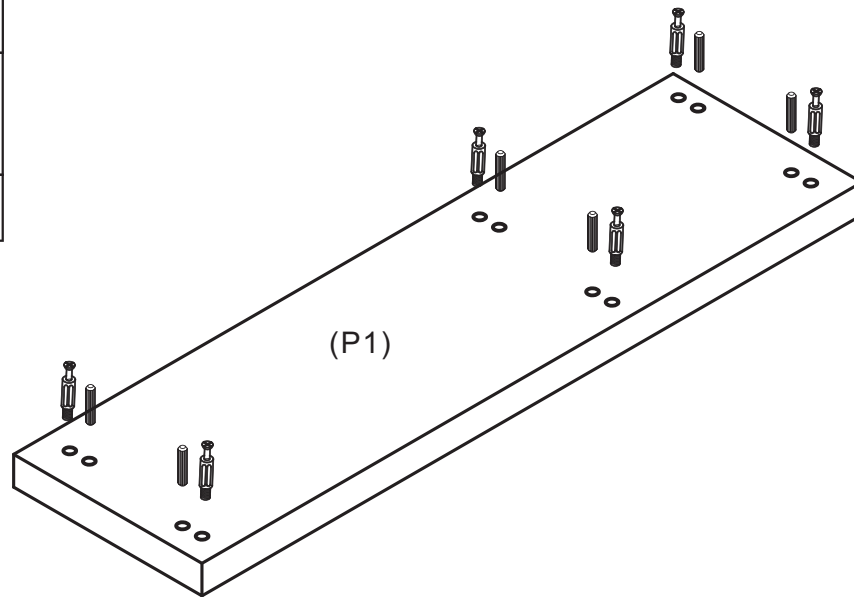

Insert 6 x Dowels(H3) into Unit Top(P1) and secure 6 x Cam Bolts(H1) into Unit Top(P1) by tightening with the Phillips Head Screwdriver.


Step 12

You will need:	
	
6 x Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

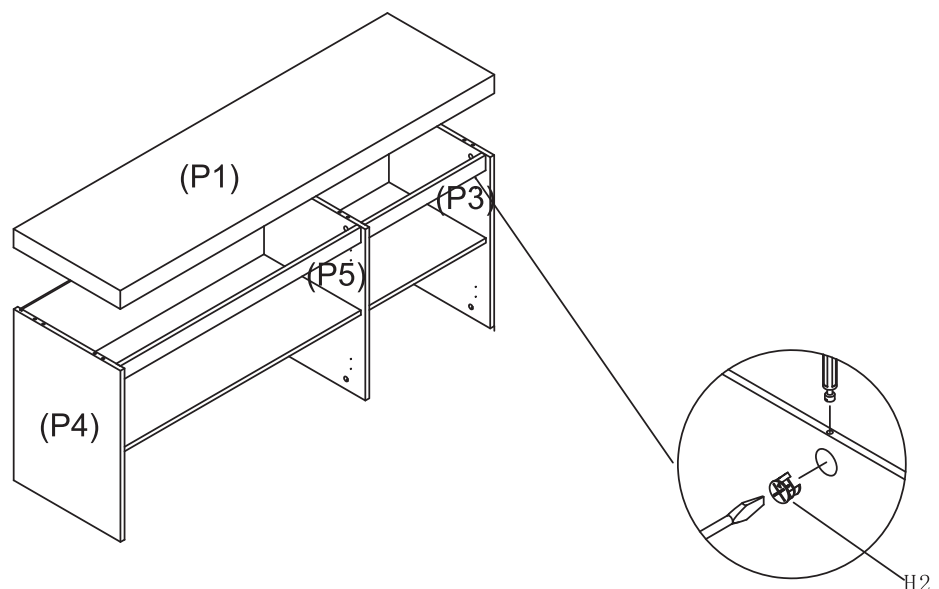

Insert 6 x Cam Nuts(H2) into Panel(P3&P4&P5) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top(P1) to Panel(P3&P4&P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

Step 13

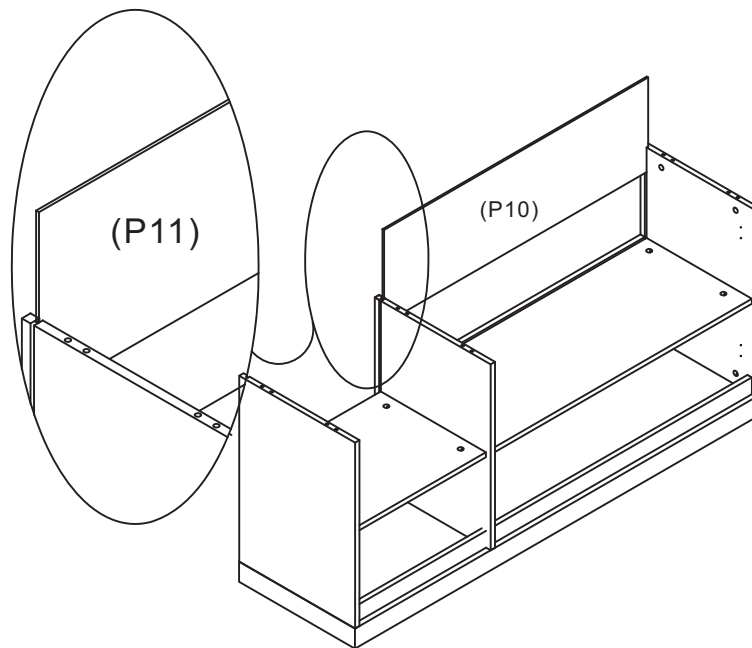

Turn over the Buffet

Slide another Long Back Panel(P10) and Short Back Panel(P11)into the groove.

Step 14

You will need:



6 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....





The head of the bolt
goes into the wide
mouth of the cam nut.
You then turn the nut
so the narrow part
closes over the bolt.

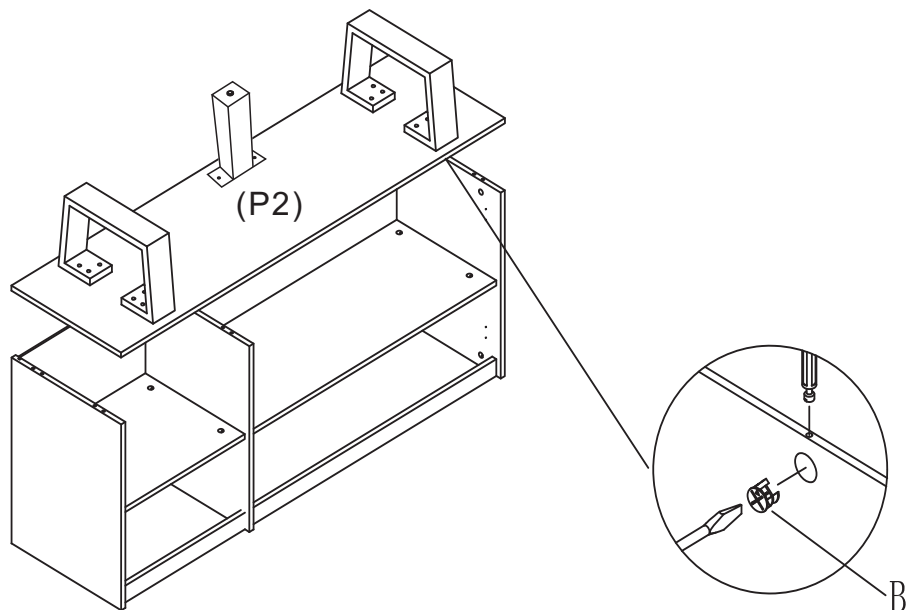


Insert 6 x Cam Nuts(H2) into Panel(P3&P4&P5) as shown.

Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Attach Bottom(P2) to Panel(P3&P4&P5) by tightening the Cam Nuts(H2)
with the Phillips Head Screwdriver


Step 15


You will need:	
	
6 x Hinges (H4)	12 x Short Screws (H5)

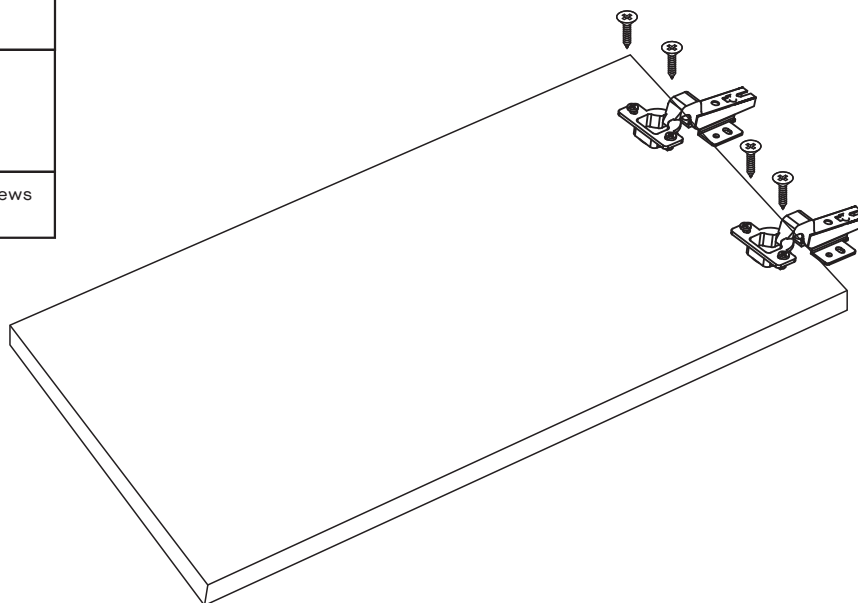

Using 4 x Short Screws(H5) to connect 2 x Hinges(H4) to Right Door(P13)
Adjust the door then tighten all screws with a Phillips Head Screwdriver.
Repeat previous step for Another Right Door(P13) and Left Door(P12)


Step 16


You will need:	
	
24 x Short Bolts (H5)	

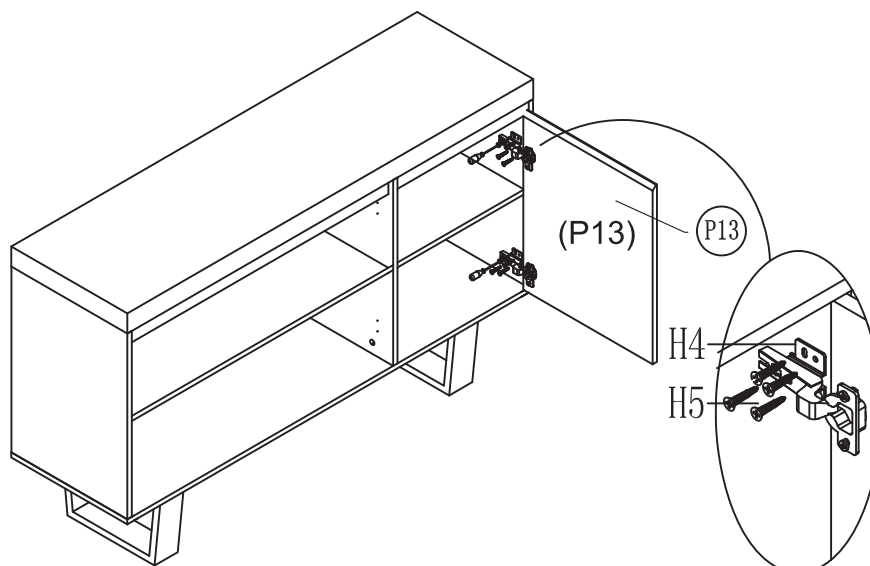

Using 8 x Short Screws(H5) to connect Right Door(P13) to Buffet by tightening with a Phillips head screwdriver.
Repeat previous step for Right Door(P13) and Left Door(P12)




Step 17

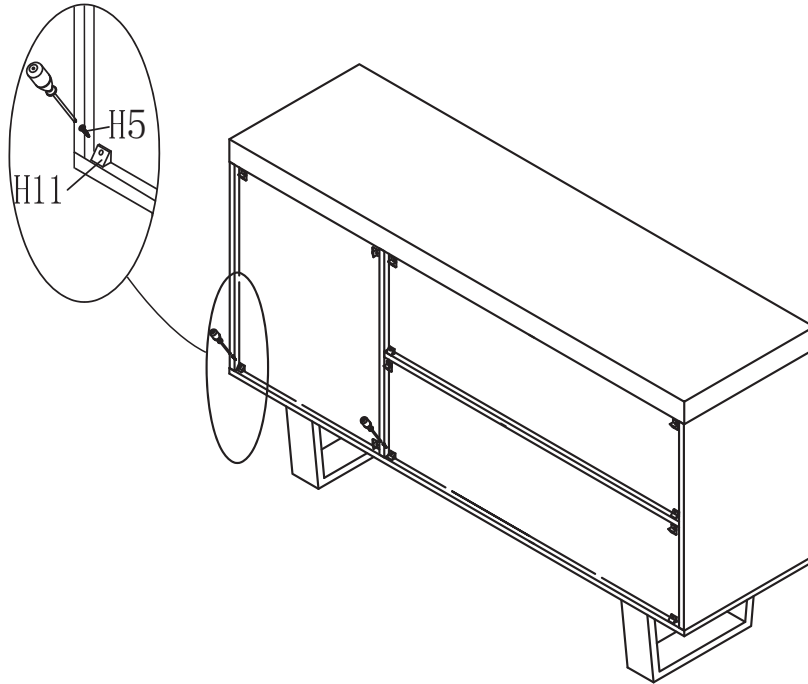
You will need:	
	
12 x Wedges (H11)	12 x Short Screws (H5)
	
Phillips Head Screwdriver	



Insert 12 x Wedges(H11) into all corners of the back of the assembled unit as shown. Secure Wedges(H11) by tightening 12 x Short Screws(H5) with the Phillips Head Screwdriver.

Step 18

You will need:	
	
1 x Long Screw (H12)	1 x Washers (H16)
	
1 x Wall Strap (H17)	

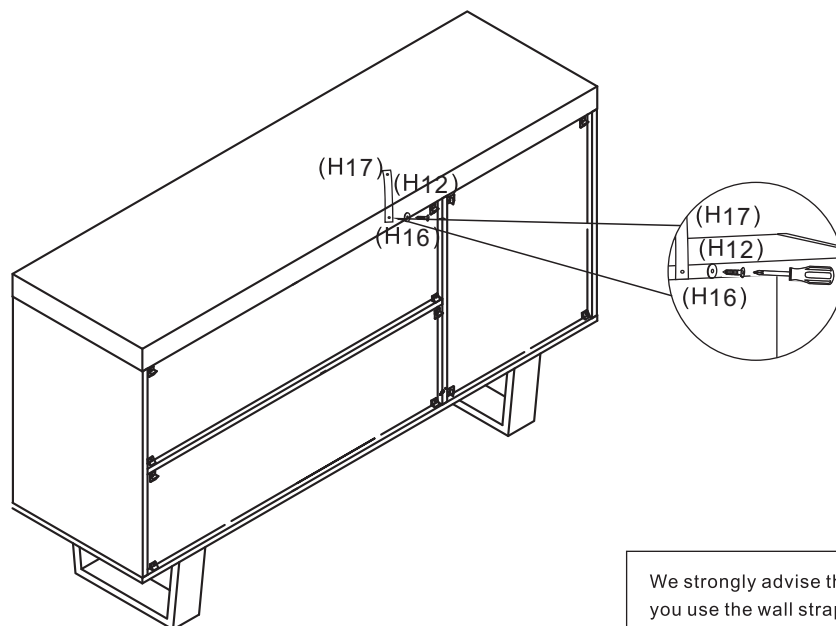

We strongly advise that you use the wall strap provided to prevent the unit topping

Use the Washer (H15) and Long Screw(H12) to connect the Wall Strap (H16) to the top Shelf (P1) using the Phillips head Screwdriver.

Step 19

You will need:





1 x Washers
(H16)


Screws and wall plugs are not provided please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach this to your specific wall.

Move furniture to its final position, then connect the end of Wall Strap (H16) to the wall. Make sure it is firmly attached and a snug fit.

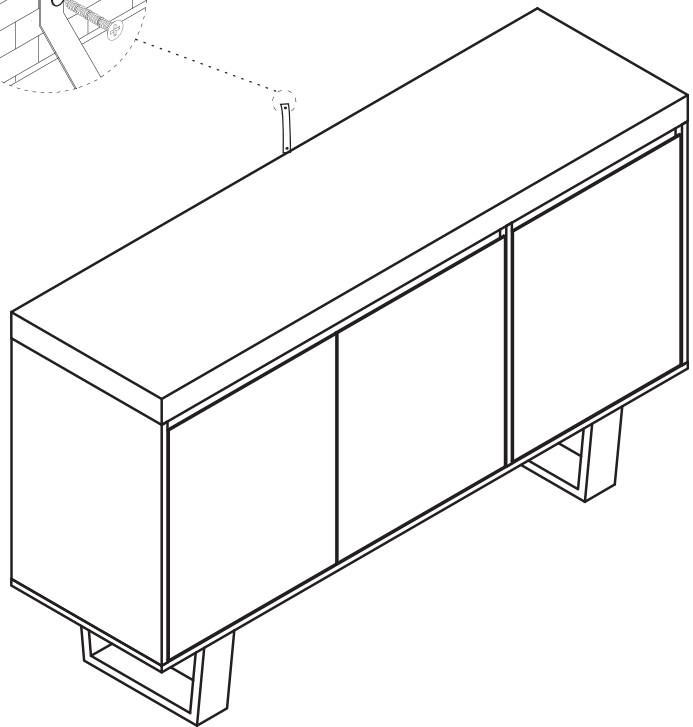

Step 20

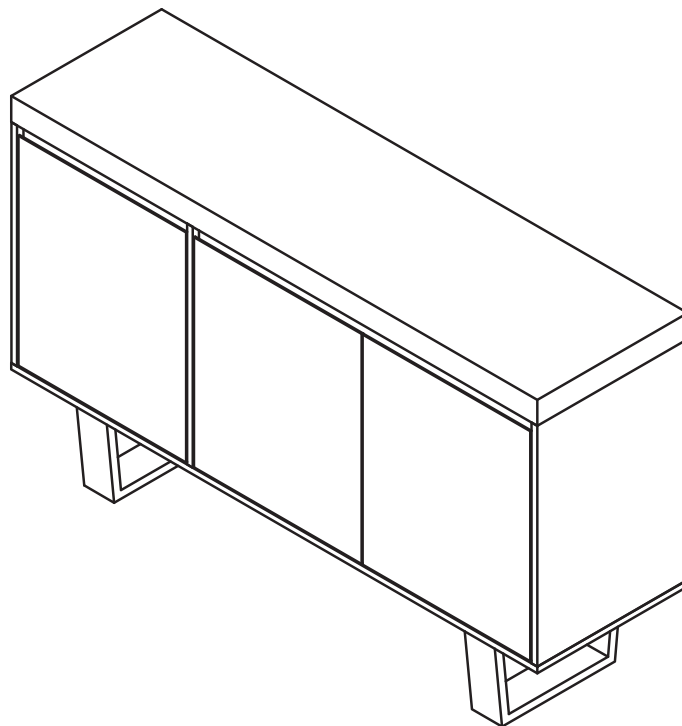

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.