


APPROVED LP 19/05/2020



TWO PEOPLE

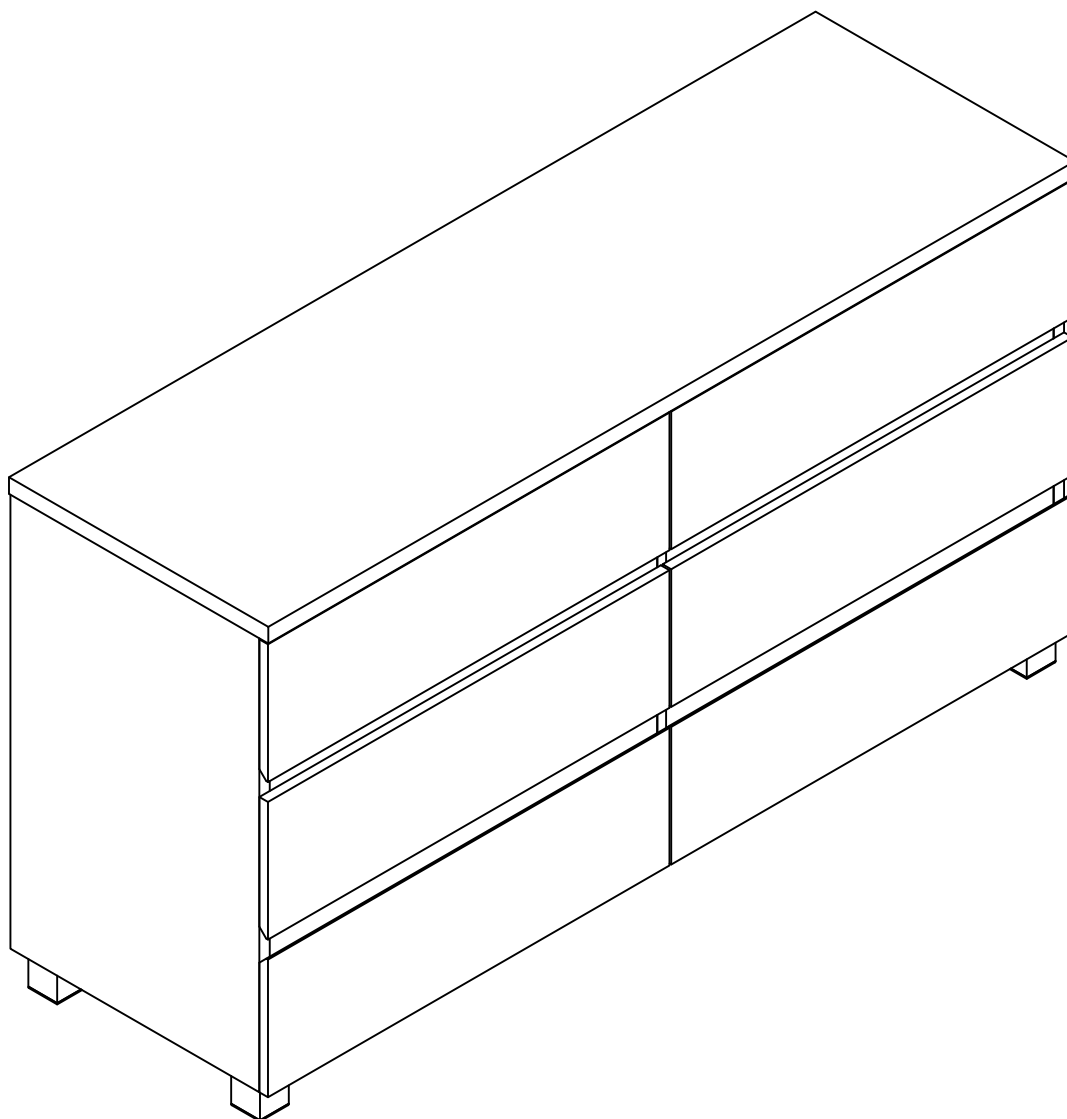

REQUIRED

Verona

Dresser 6 Drawer


fantasticfurniture.com.au

**WARNING: ENSURE THE WALL STRAP IS
ATTACHED TO AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been provided with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!




Fantastic Furniture


Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!
[@fantasticfurniture](https://www.instagram.com/fantasticfurniture)


Assembly checklist

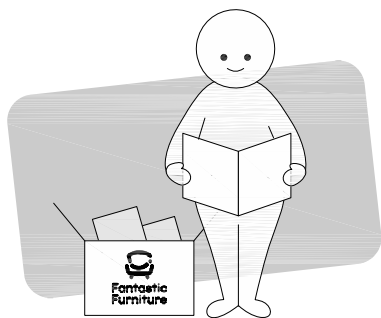


Read through the instructions carefully before you begin.

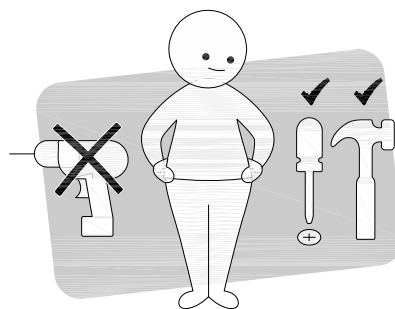

Make sure you have all the required tools. Never use power tools unless instructed.

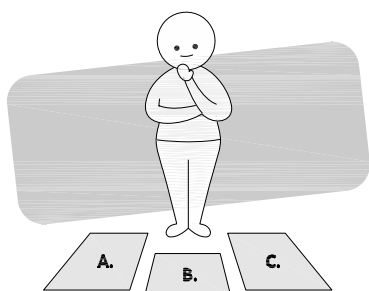

Identify and lay out all of the components before you begin assembly.

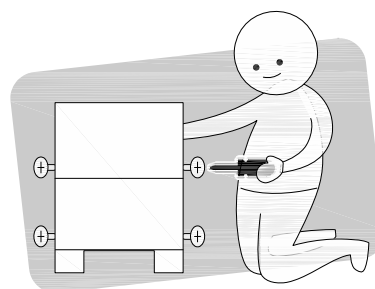

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.



**Fantastic
Furniture**

What you Need to assemble the product



Other tools you need
Phillips head screwdriver;


Parts List

Box 1:







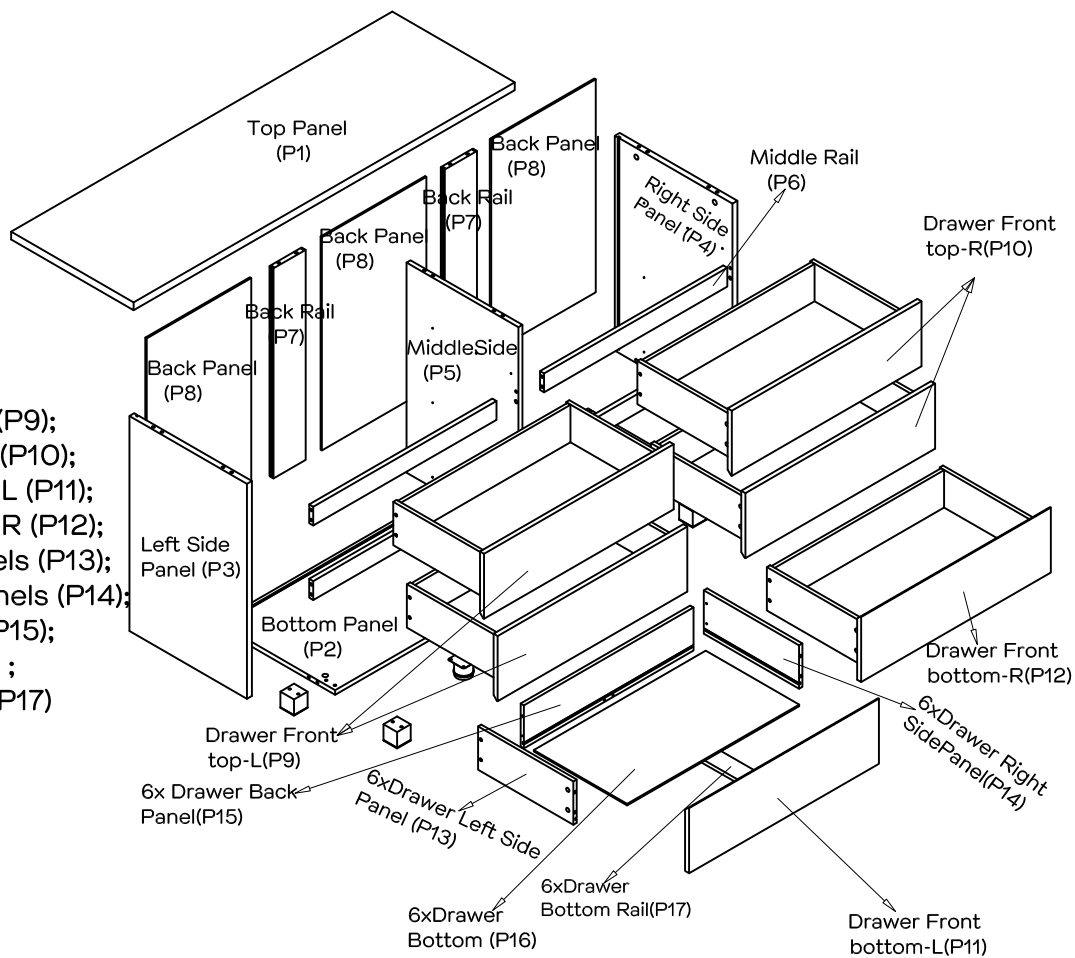












- 4 x Middle Rails (P6)
- 3 x Back Panels (P8);
- 2 x Drawer Front Tops-L (P9);
- 2 x Drawer Front Tops-R (P10);
- 1 x Drawer Front Bottom-L (P11);
- 1 x Drawer Front Bottom-R (P12);
- 6 x Drawer Left Side Panels (P13);
- 6 x Drawer Right Side Panels (P14);
- 6 x Drawer Back Panels (P15);
- 6 x Drawer Bottoms (P16);
- 6 x drawer Bottom Rails (P17)

Box 2:

- Top Panel (P1);
- Bottom Panel (P2);
- Left Side Panel (P3);
- Right Side Panel (P4);
- Middle Side Panel (P5);
- 2 x Back Rail Panels (P7)









Hardware list

							
28 x Large Cam Bolts (H1)	28 x Large Cam Nuts (H2)	16 x Small Wooden Dowels (H3)	2 x Large Wooden Dowels (H4)	30xSmall Cam Bolts (H5)	30xSmall Cam Nuts (H6)	72 x Screws 12mm (H7)	36 x Screws 30mm (H8)
							
1 x Wall Strap (H9)	1 x Screws 20mm (H10)	2 x Washers (H11)	12 x Screws 18mm (H12)	12 x Back Panel Holders (H13)	4 x Screws 14mm (H14)	12 x Slides (H15)	8 x Bolts 15mm (H16)
							
4 x Legs (H17)	4 x Leg Caps (H18)	1 x Leg (H19)					

Step 1



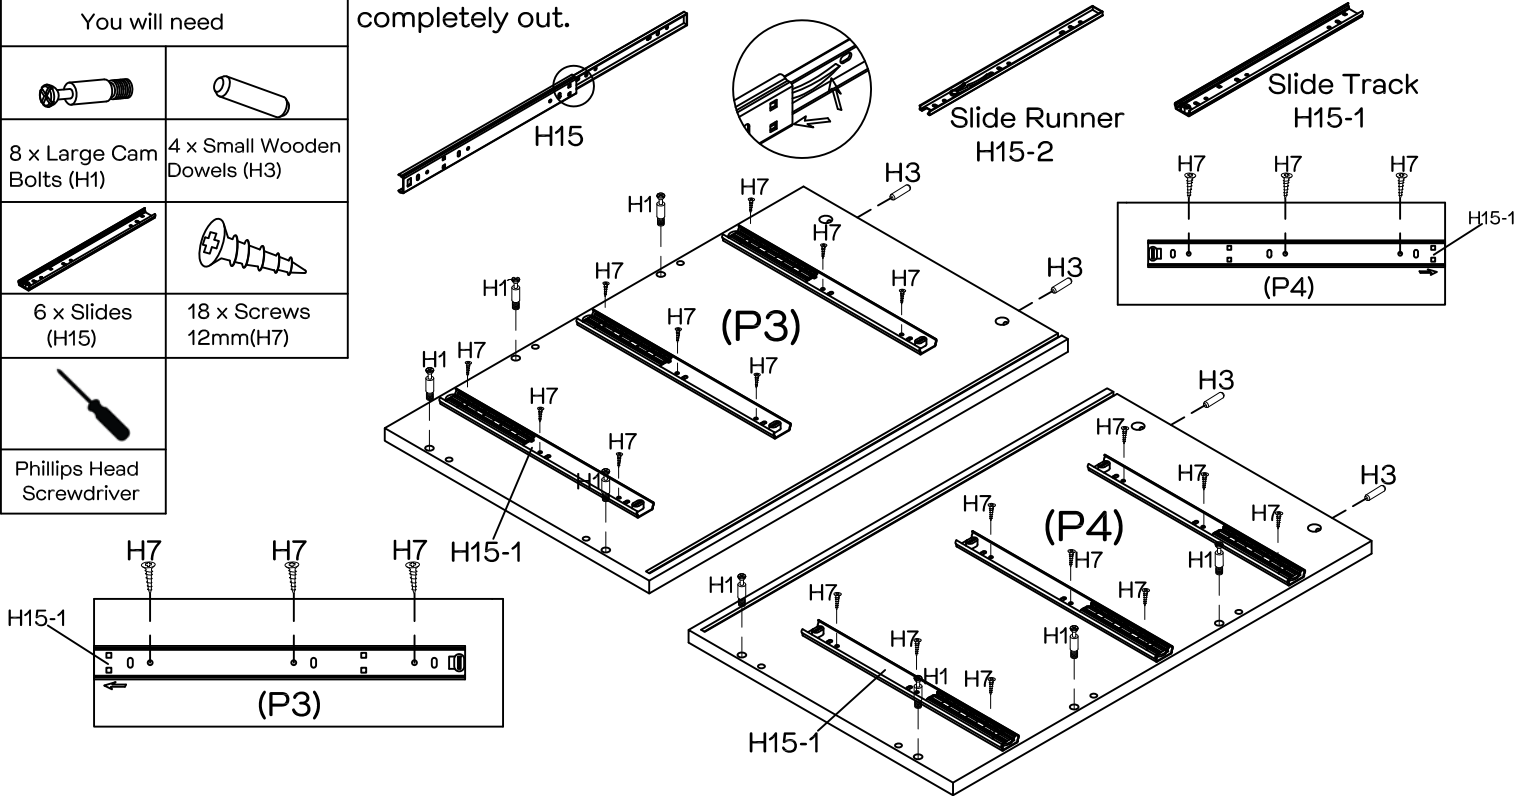


Separate the slide runners (H15-2) and slide tracks (H15-1) from slide (H15) by following the steps below. Extend the slide runner all the way forward. Press the plastic release lever of the slide down and pull the slide runner (H15-2) completely out.


You will need	
	
8 x Large Cam Bolts (H1)	4 x Small Wooden Dowels (H3)
	
6 x Slides (H15)	18 x Screws 12mm(H7)
	
Phillips Head Screwdriver	



Insert 4 x small wooden dowels (H3) into the left side panel (P3) and right side panel (P4). Attach 6 x slide tracks (H15-1) to the left side panel (P3) and the right side panel (P4) by using 18 x screws (H7). Tighten with a phillips head screwdriver. Attach 8 x large cam bolts (H1) onto the left side panel (P3) and right side panel (P4). Tighten with a phillips head screwdriver.


Step 2


You will need	
	
4 x Large Cam Bolts (H1)	4 x Small Wooden Dowels (H3)
	
6 x SlideTracks (H15-1)	18 x Screws Ø3.5x12mm (H7)
	
Phillips Head Screwdriver	

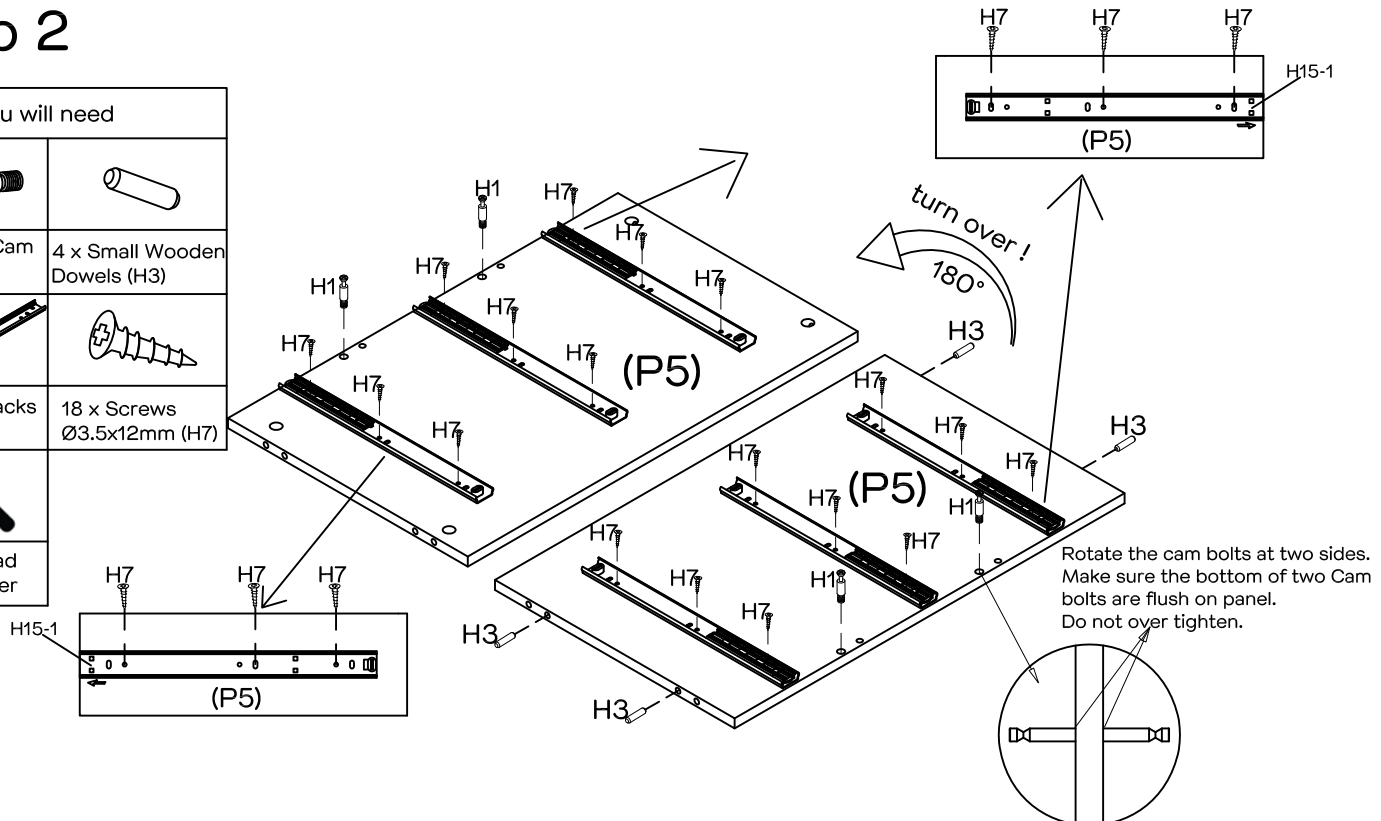

Attach 3 x slide track (H15-1) onto the right of the middle side panel (P5) by using 9 x screws (H7). Tighten with a phillips head screwdriver. Attach 3 x slide tracks (H15-1) onto the left of the middle side panel (P5) by using 9 x screws (H7). Tighten with a phillips head screwdriver. Insert 4 x small wooden dowels (H3) into the ends of the middle side panel (P5). Screw 4 x large cam bolts (H1) into the middle side panel (P5), tighten with a phillips head screwdriver.




Step 3

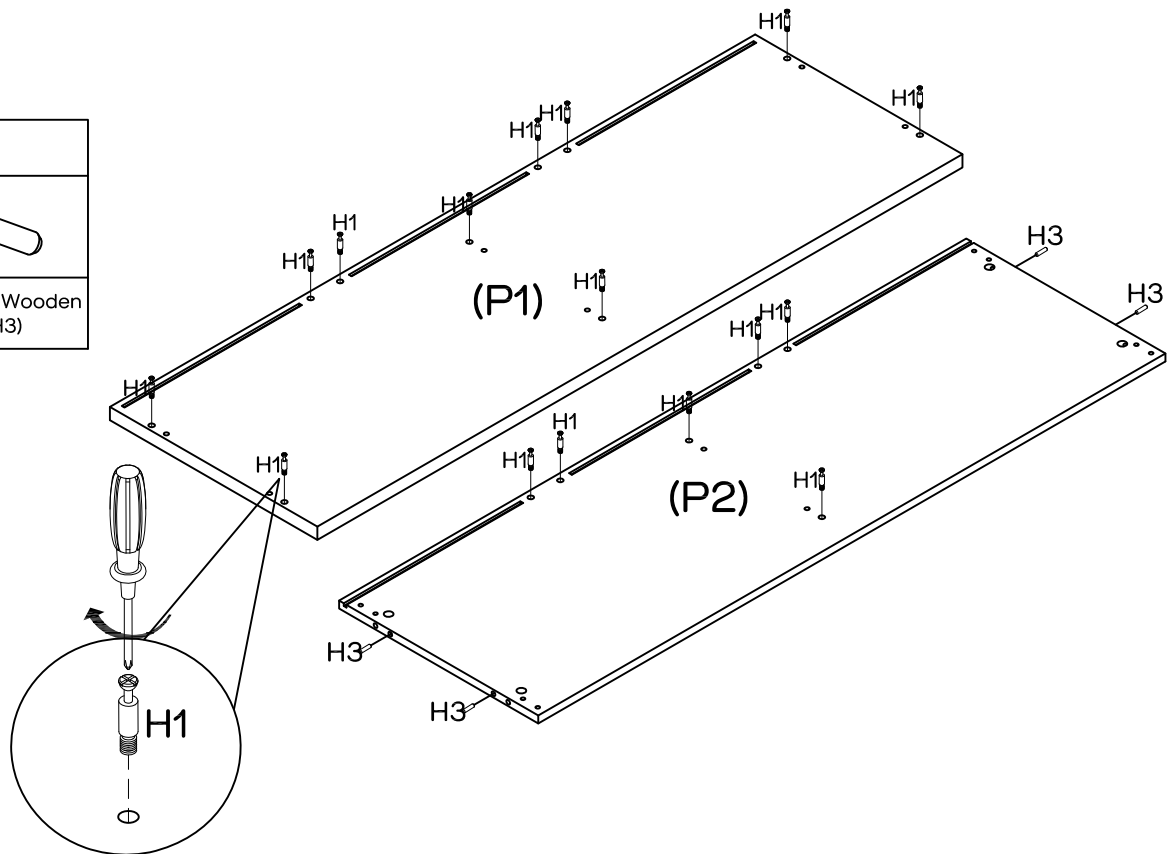
You will need	
	
16 x Large Cam Bolts (H1)	4 x Small Wooden Dowels (H3)
	
Phillips Head Screwdriver	




Insert 4 x small wooden dowels (H3) into the bottom panel (P2). Using a phillips head screwdriver, screw 16 x large cam bolts (H1) into the top panel (P1) and bottom panel (P2).

Step 4


You will need	
	
4 x Large Cam Nuts (H2)	2 x Large Wooden Dowels (H4)
	
Phillips Head Screwdriver	

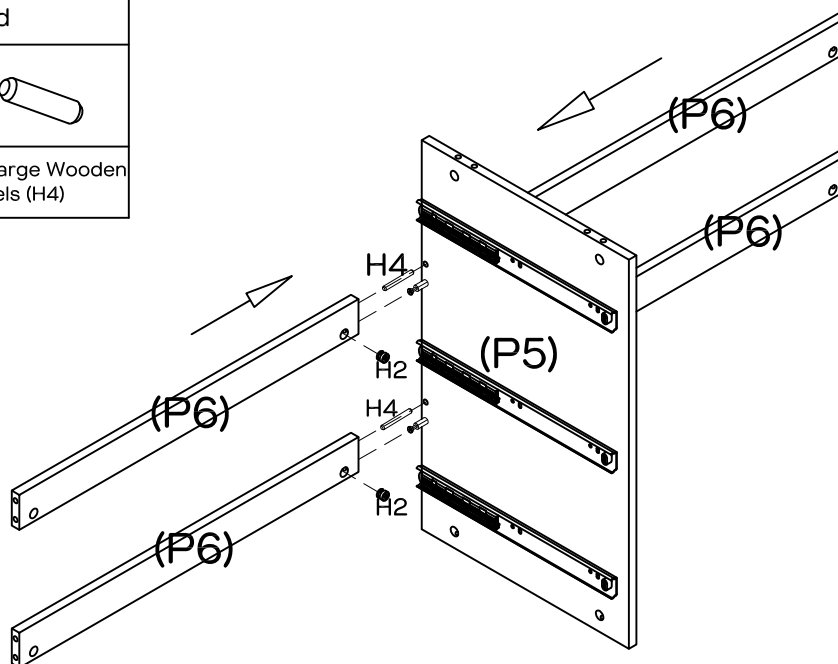


TWO PEOPLE



REQUIRED






This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 2 x large wooden dowels (H4) into the middle rails (P6) and middle side panel (P5) then insert 4 x large cam nuts (H2) into the middle rails (P6). Rotate the cam nuts so the open mouth points towards the incoming cam bolts. Attach the middle rails (P6) to the middle side panel (P5). Using a phillips head screwdriver turn the cam nuts (H2) clockwise to lock.

Step 5

You will need	
	
2 x Large Cam Nuts (H2)	4 x Small Wooden Dowels (H3)
	
Phillips Head Screwdriver	


Dowel face up.

Make sure the end with label face up.


TWO PEOPLE



REQUIRED

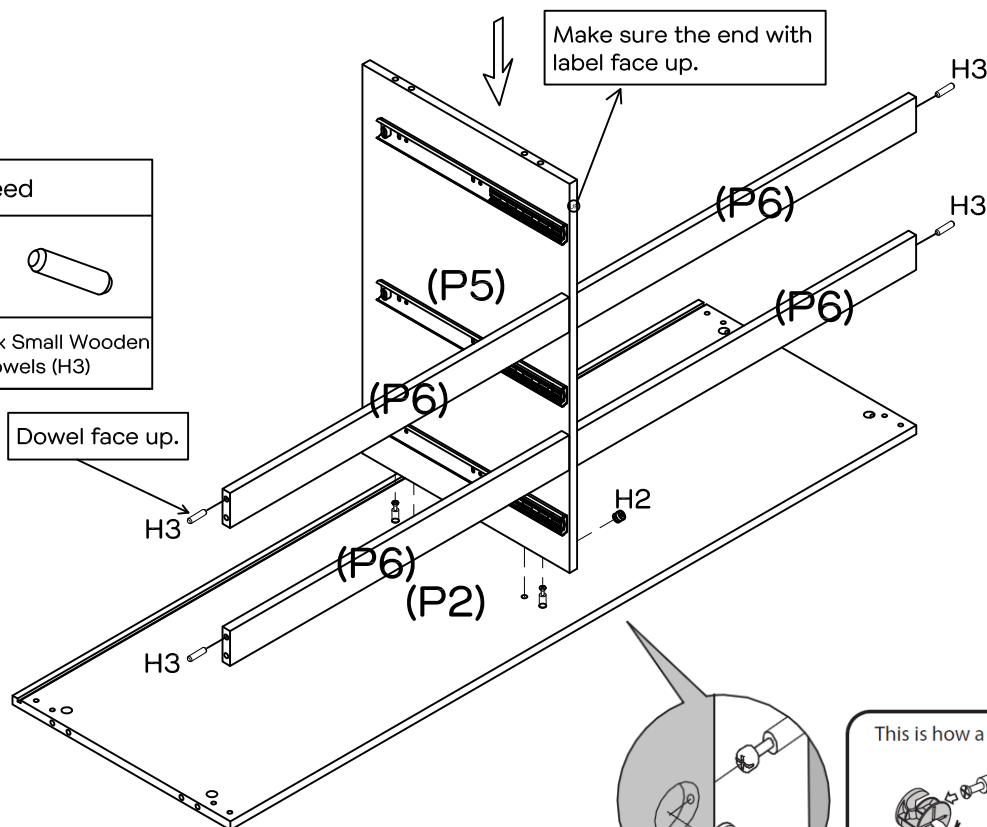



This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x small wooden dowels (H3) into the middle rails (P6). Position panels (P5,P6) to align with the bottom panel (P2). Insert 2 x large cam nuts (H2) into the middle side panel (P5). Rotate the cam nuts so the open mouth points toward the incoming cam bolts. Turn the cam nuts (H2) clockwise to lock.


Step 6

You will need	
	
8 x Large Cam Nuts (H2)	Phillips Head Screwdriver


TWO PEOPLE



REQUIRED

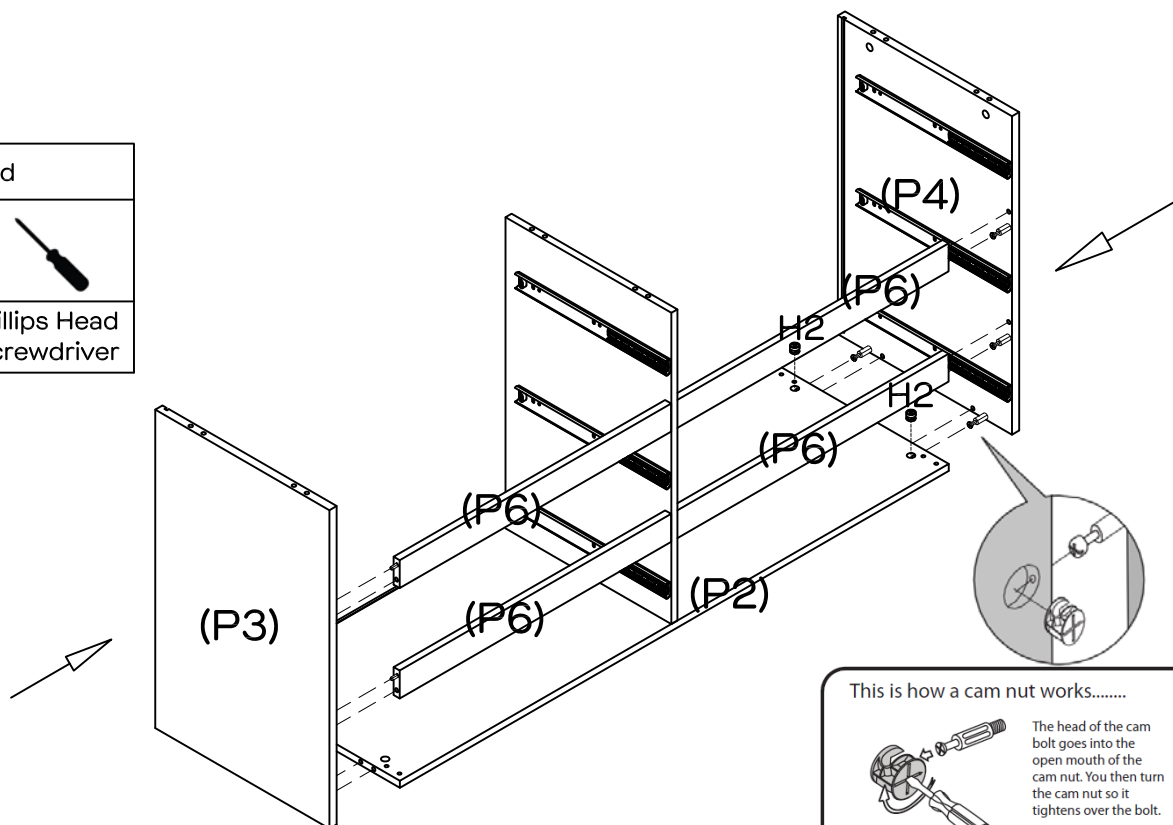



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Position the side panels (P3 ,P4) to align with the bottom panel (P2) , and rails (P6).Insert 8 x large cam nuts (H2) into the bottom panel (P2) and rails (P6). Rotate the cam nuts (H2) so they points toward the incoming cam bolts. Turn the cam nuts (H2) clockwise to lock.


Step 7

You will need	
	
4 x Large Cam Nuts (H2)	Phillips Head Screwdriver

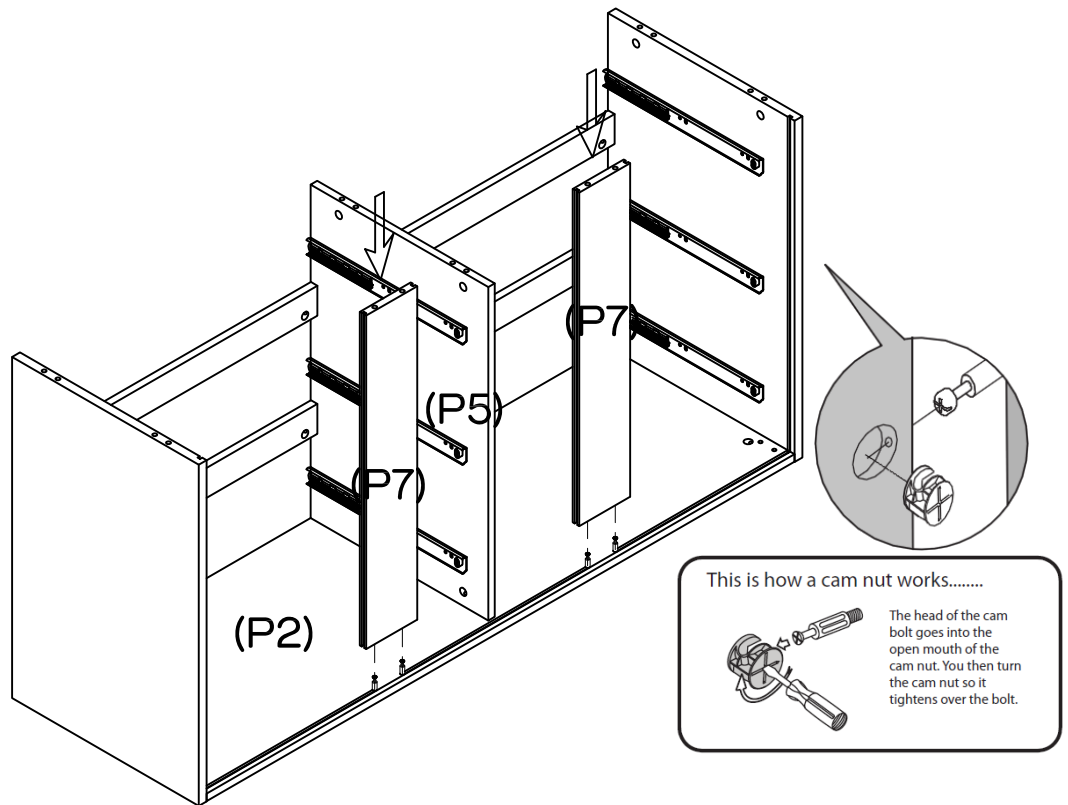



Position 2 x back rail panels (P7) so they align with the bottom panel (P2). Insert 4 x large cam nuts (H2) into back rail (P7). Rotate the cam nuts (H2) so the open mouth points toward the incoming cam bolts. Turn the cam nuts (H2) clockwise to lock. Tighten with a phillips head screwdriver.

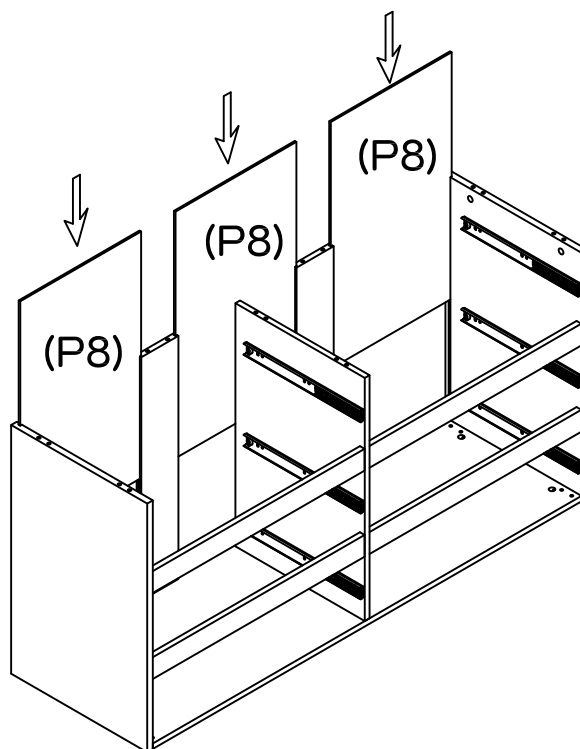
Step 8



Slide 3 x back panels (P8) into the grooves of the left side panel (P3), back rail panels (P7) and right side panel (P4).



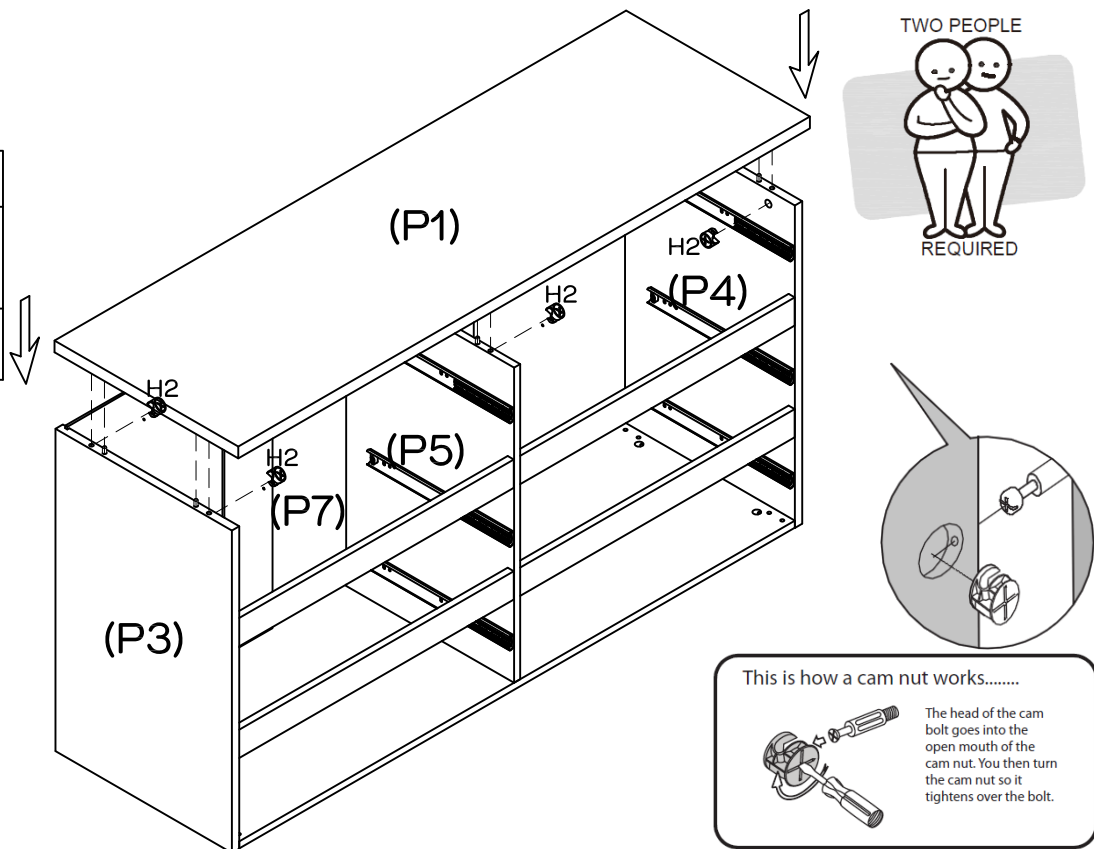



Step 9


You will need	
	
10 x Large Cam Nuts (H2)	Phillips Head Screwdriver



Position the top panel (P1) so it is aligned with left side panel (P3), right side panel (P4), middle side panel (P5) and back rail panels (P7). Insert 10 x large cam nuts (H2) into (P3, P4, P5, P7). Rotate the cam nuts (H2) so the open mouth points towards the incoming cam bolts. Turn the cam nuts (H2) clockwise to lock.





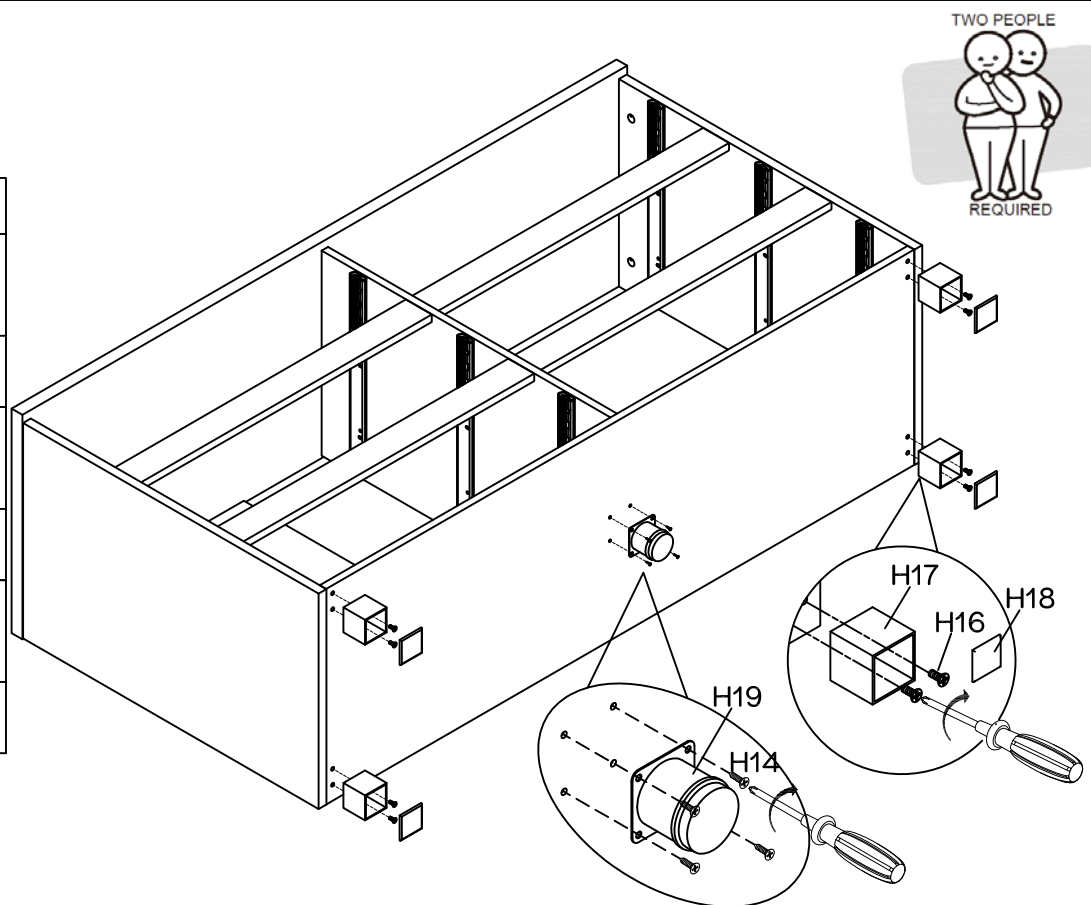

Step 10

You will need	
	
8 x Bolts 15mm (H16)	4 x Screws 14mm (H14)
	
4 x Legs (H17)	4 x Leg Caps (H18)
	
1 x Leg (H19)	Phillips Head Screwdriver




Attach 4 x legs (H17) to the bottom panel (P2) by using 8 x bolts (H16), tighten with a phillips head screwdriver. Insert 4 x leg caps (H18) onto legs (H17), then attach 1 x leg (H19) to bottom panel (P2) by using 4 x screws (H14), tighten with phillips head screwdriver.

Step 11



You will need	
	
1 x Wall strap (H9)	1 x Screw 20mm (H10)
	
1 x Washer (H11)	12 x Back Panel Holders (H13)
	
12 x Screws 18mm (H12)	Phillips Head Screwdriver


We strongly advise that you use the wall safety strap provided to prevent the unit toppling.

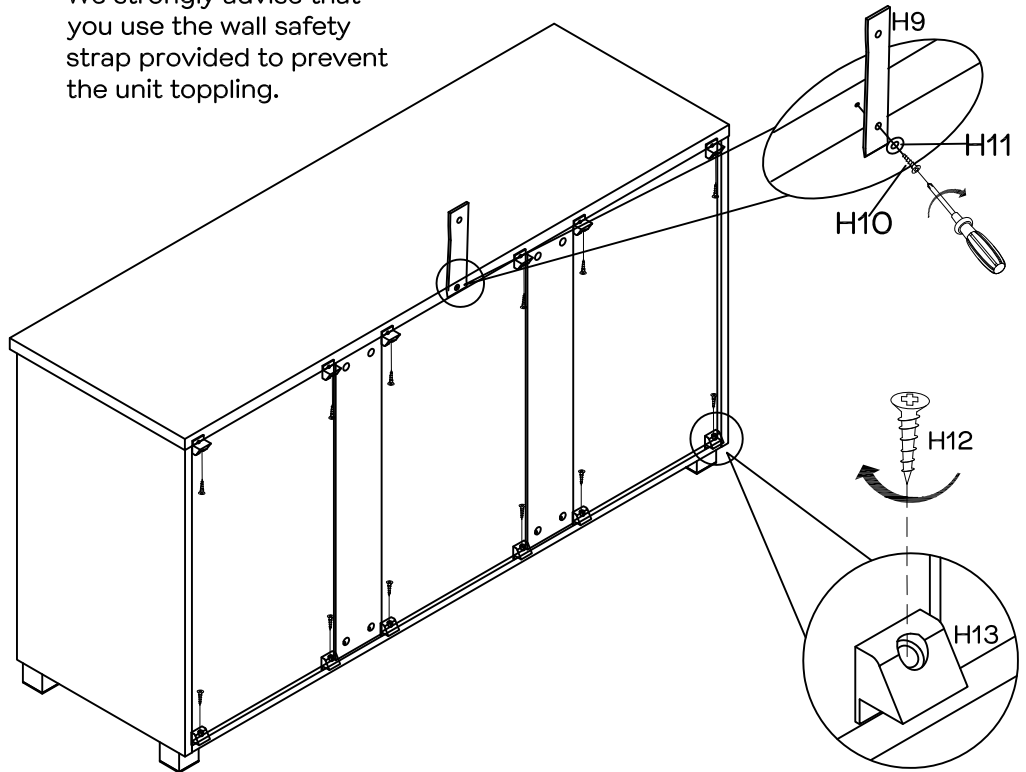

Slide 12 x back panel holders (H13) into the grooves as shown. Insert 12 x screws (H12) to fix them into place. Tighten with a phillips head screwdriver. Attach the wall strap (H9) to the top panel (P1) with screw (H10) and washer (H11).




Step 12


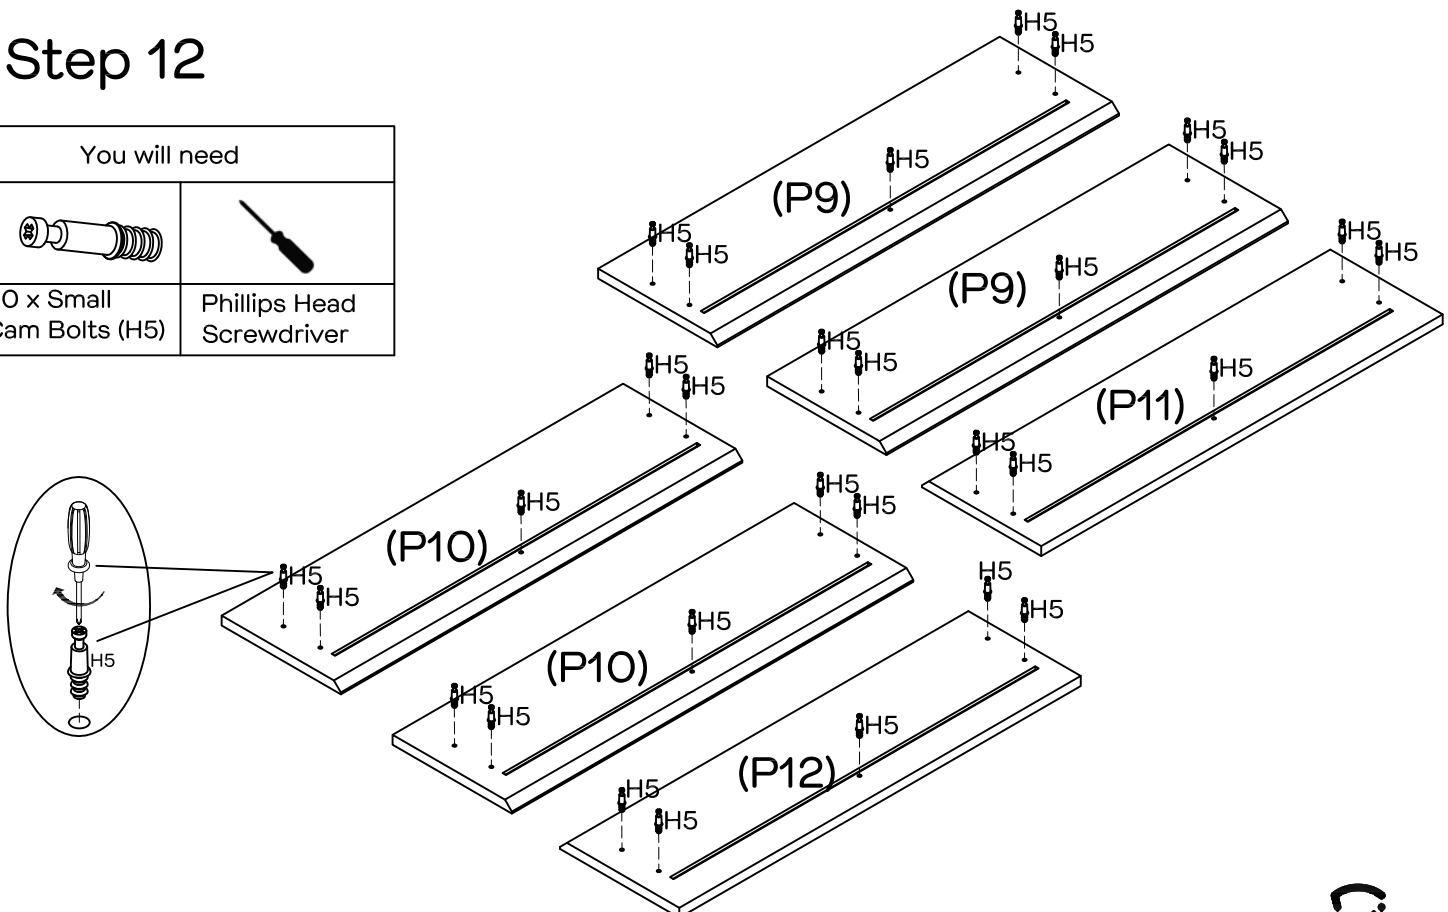
You will need	
	
30 x Small Cam Bolts (H5)	Phillips Head Screwdriver



Screw 30 x small cam bolts (H5) into the drawer fronts panels (P9, P10, P11, P12), tighten with a phillips head screwdriver.

Step 13



You will need	
	
12 x Slide Runners (H15-2)	36 x Screws 12mm (H7)
	
Phillips Head Screwdriver	

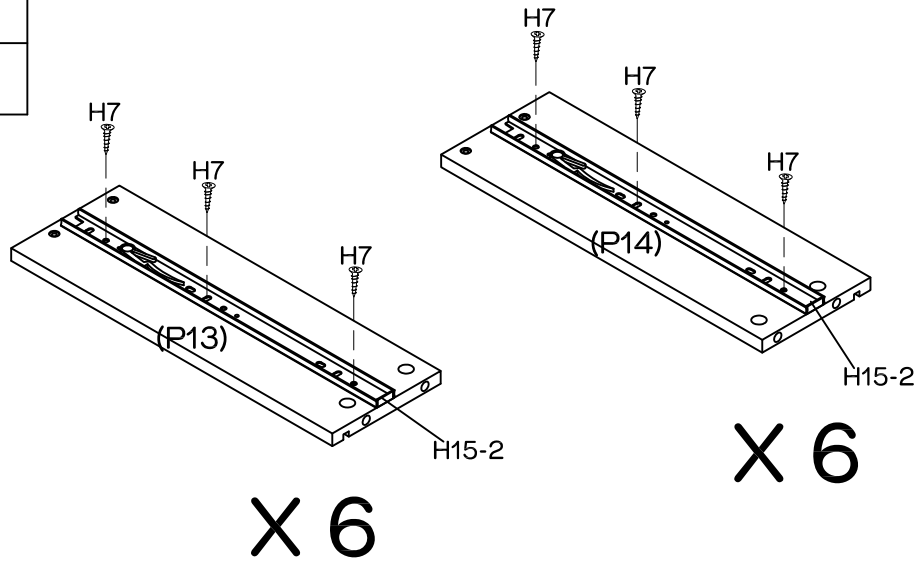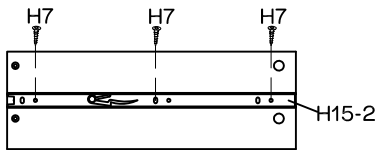

Attach 12 x slide runners (H15-2) to drawer side panels (P13, P14) by using 36 x screws (H7) as shown, tighten with a phillips head screwdriver.


Step 14

You will need	
	
30 x Small Cam Nuts (H6)	Phillips Head Screwdriver

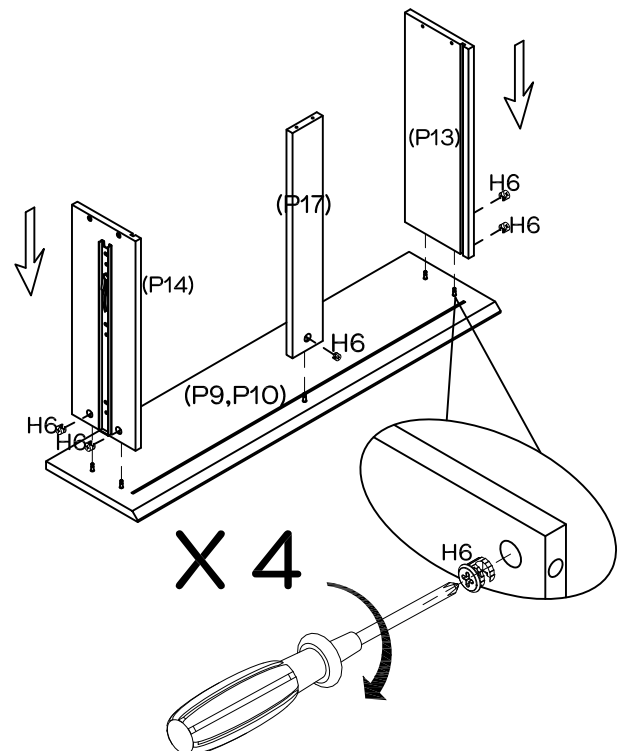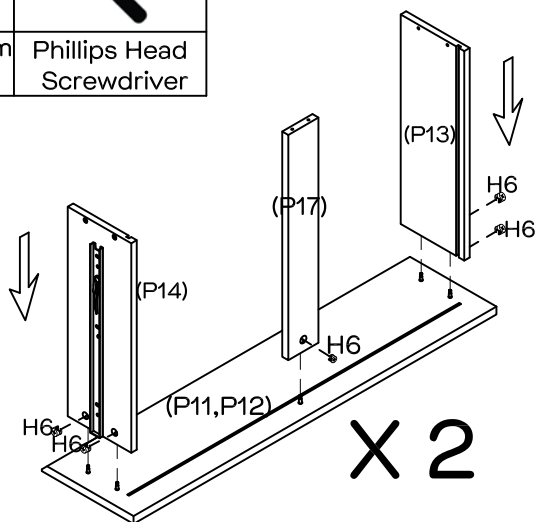

Align the 6 x drawer left sides (P13) and 6 x drawer right sides (P14) and 6 x drawer bottom rails (P17) to the drawer fronts (P9, P10, P11, P12). Insert 30 x small cam nuts (H6) into the holes on panels (P13, P14, P17) as shown, make sure the opening on cam nuts (H2) are facing incoming cam bolts, turn clockwise to lock.


Step 15

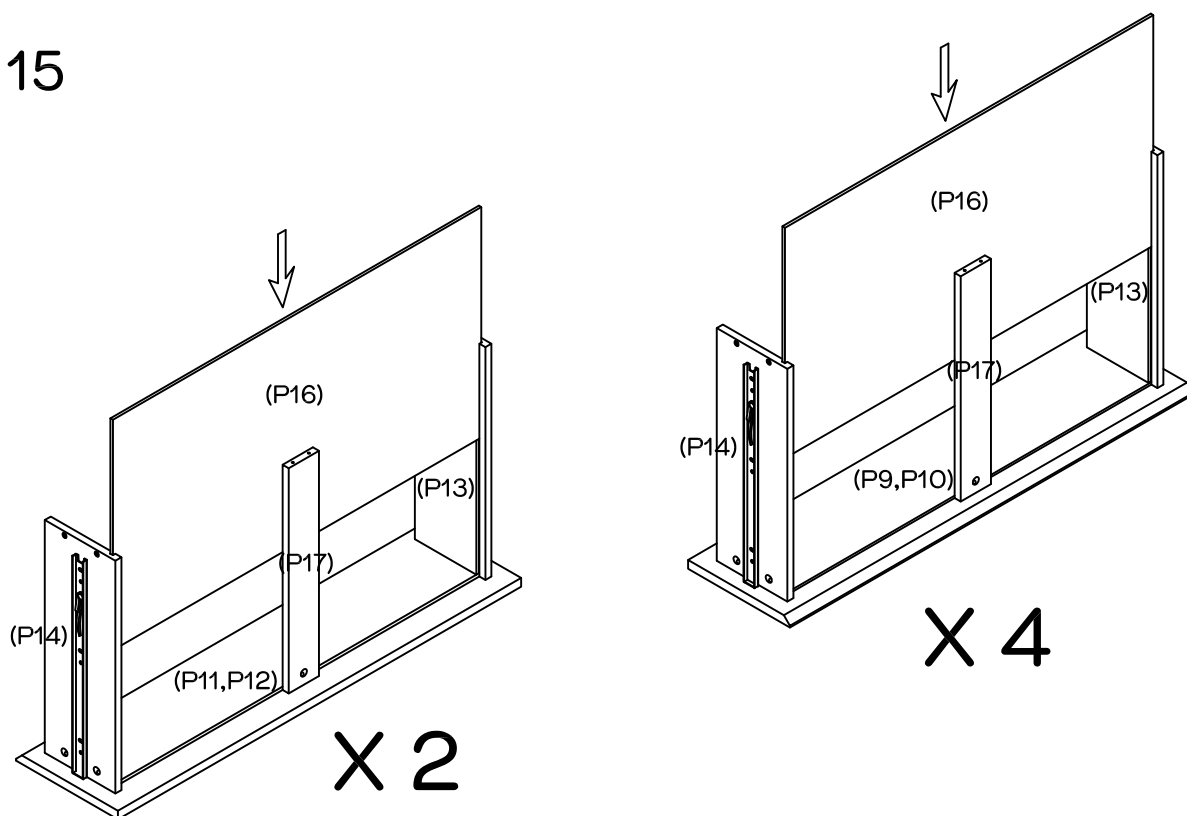

Insert the drawer bottom panels (P16) into the grooves of the drawer fronts (P9, P10, P11, P12), drawer left sides (P13) and drawer right sides (P14). Repeat step for all 6 drawers.


Step 16

You will need	
	
36 x Screws 30mm (H8)	Phillips Head Screwdriver

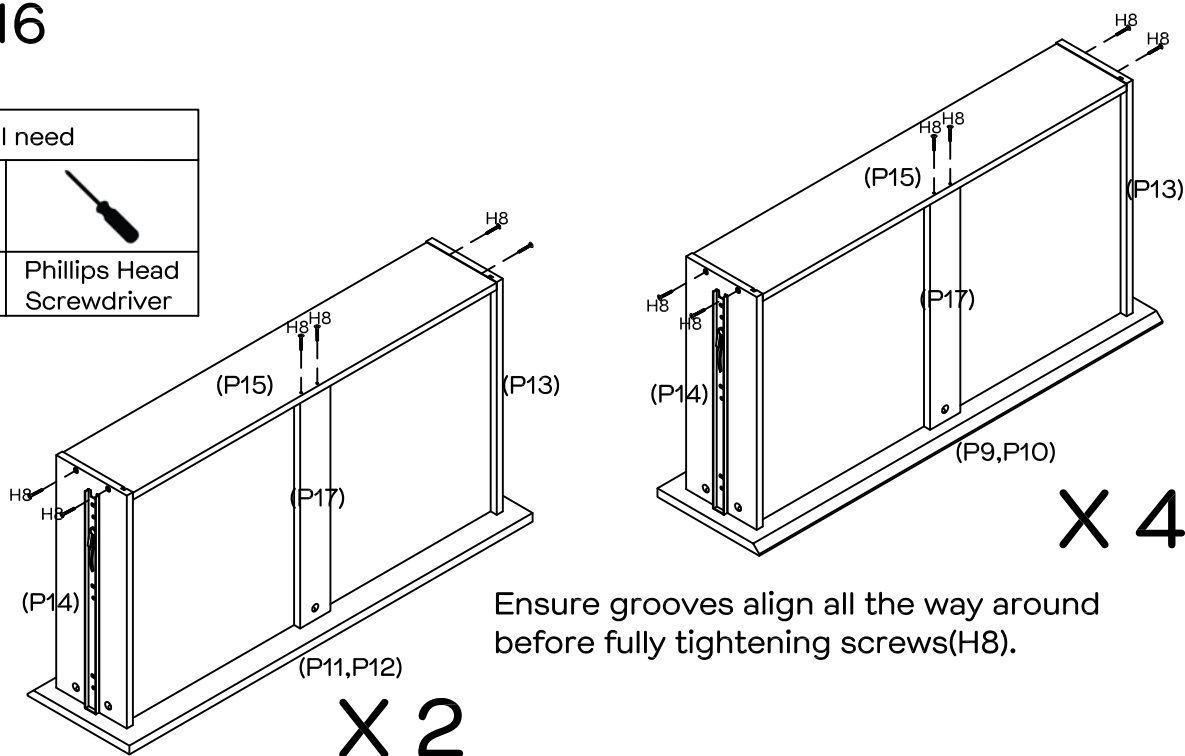


Screw 6 x screws (H8) to the drawer left side panel (P13), drawer back panel (P15), drawer rail (P17) and drawer right side panel (P14). Tighten all screws with a phillips head screwdriver, ensure grooves align all the way round before fully tightening screws. Repeat this step for all 6 drawers.

Step 17

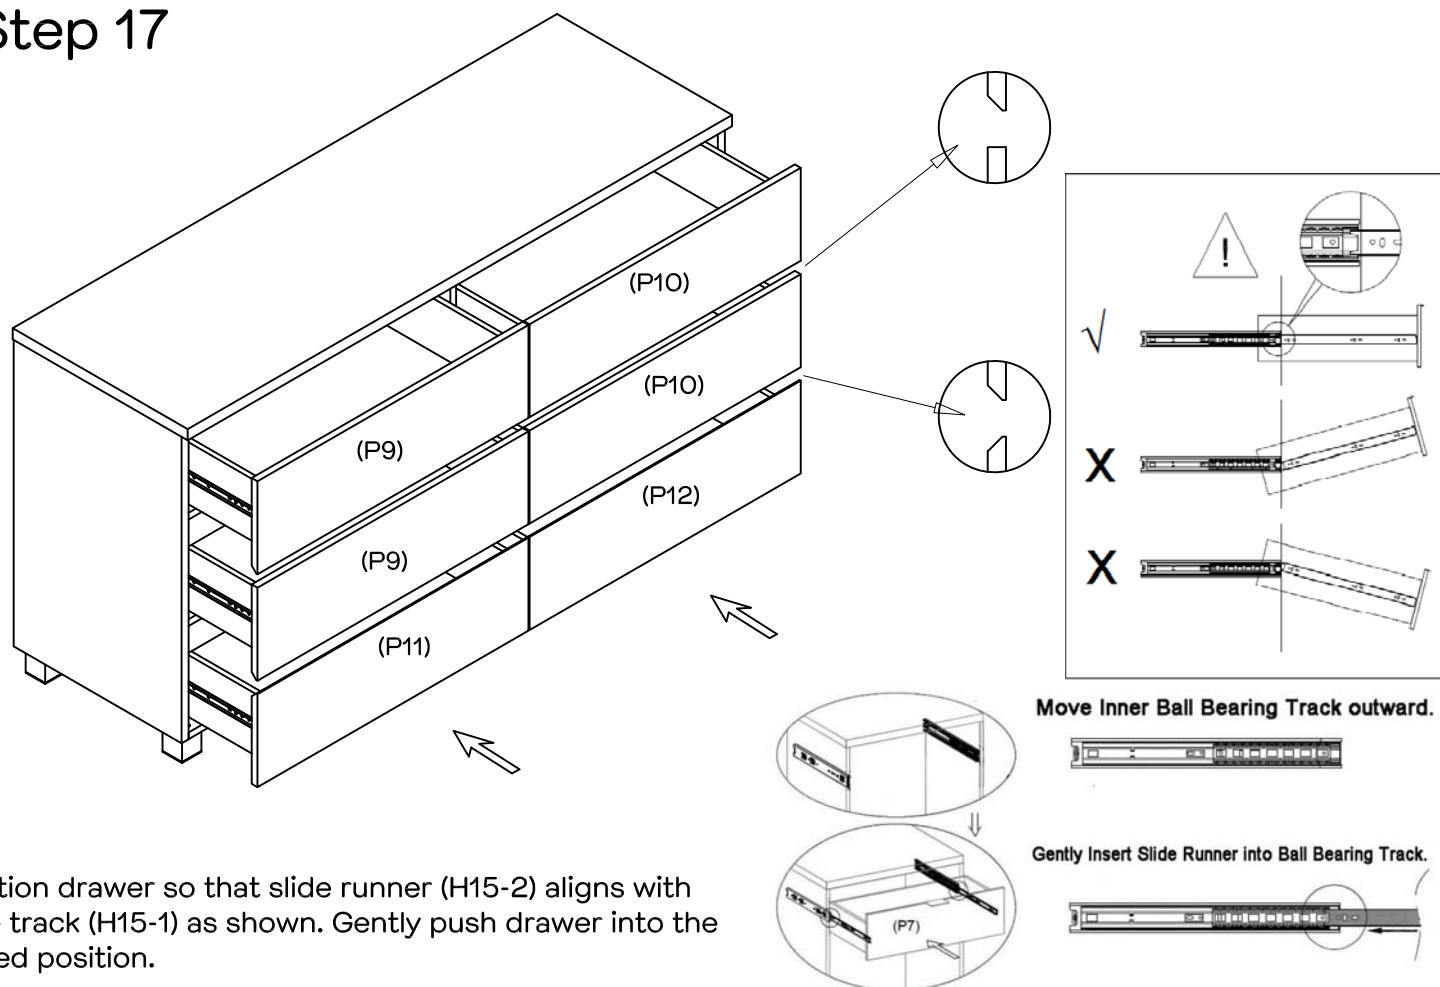

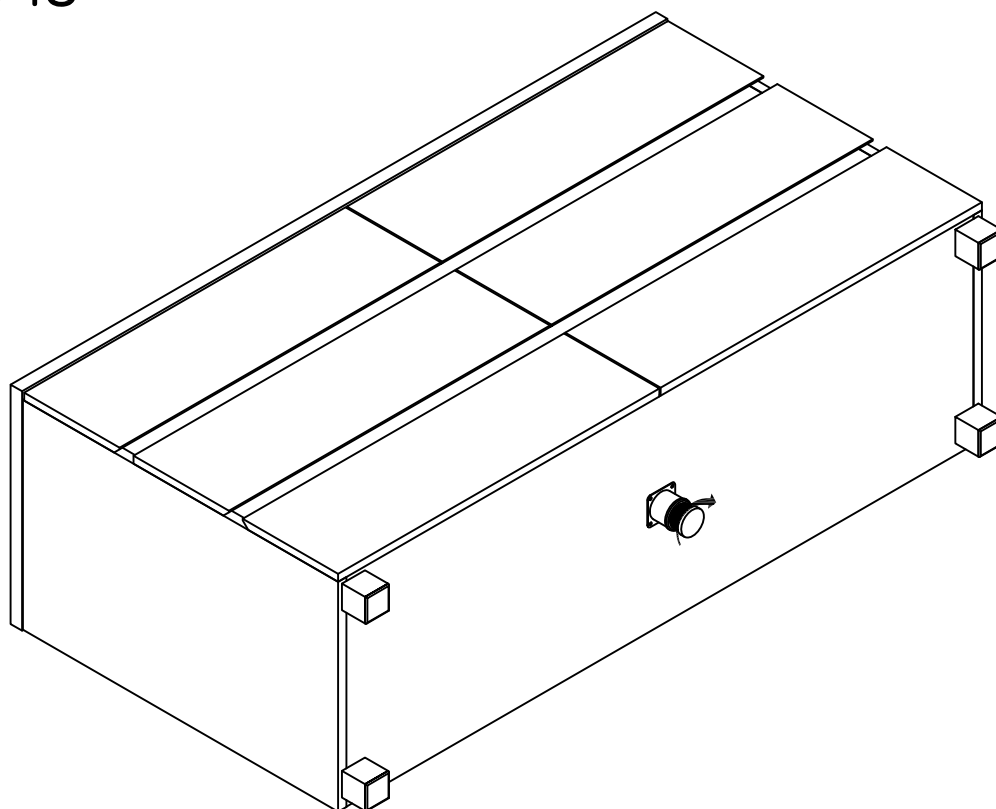


Step 18



If the floor is uneven, please twist on the adjustable leg to stabilize the unit.


Step 19

You will need	
	
1 x Washer (H11)	Phillips Head Screwdriver
Wall Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

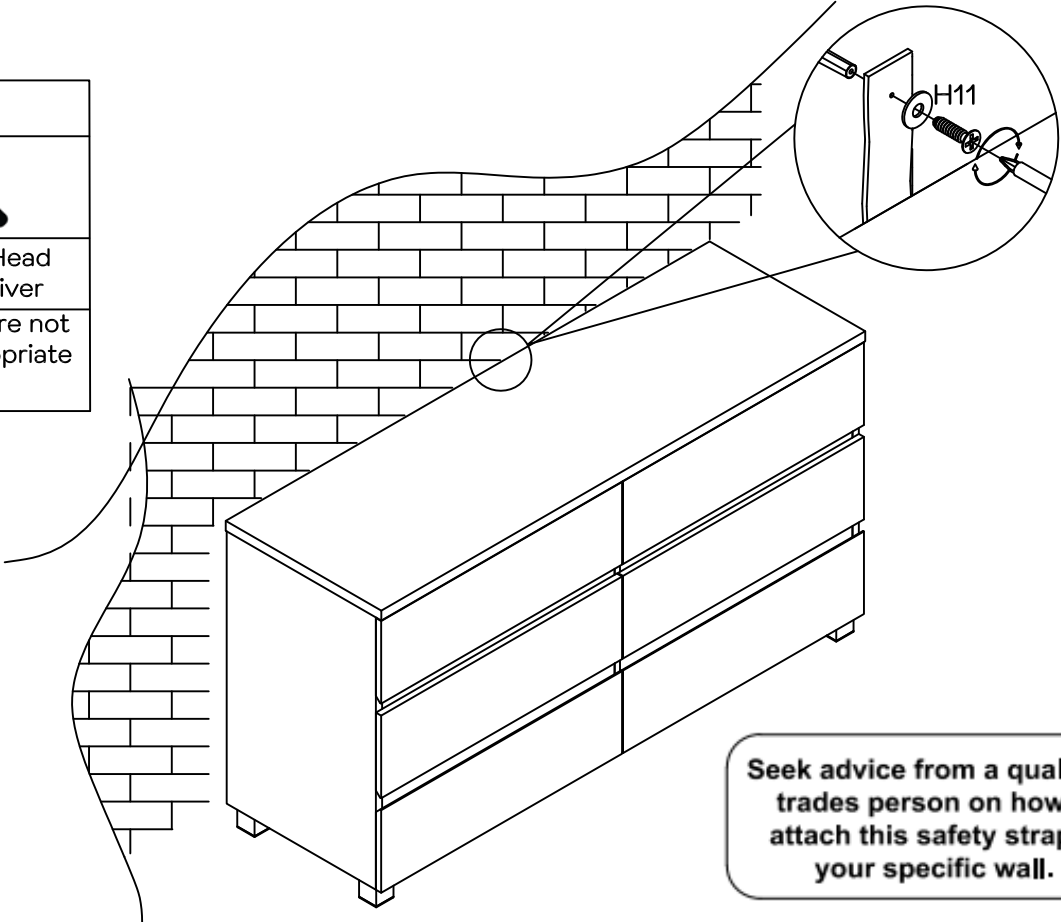

Move the dresser to the final position and attach the wall strap to the wall. Make sure it is firmly attached and secure.

Step 20

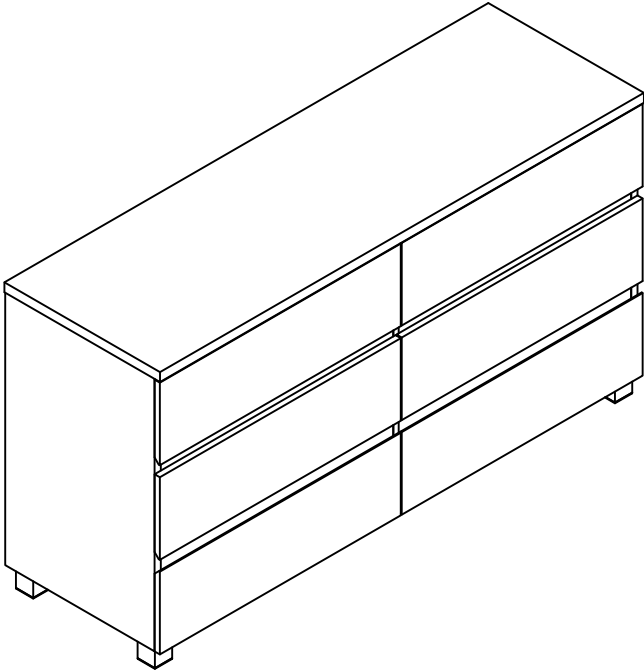

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.