




**Fantastic
Furniture**

Version 1.0

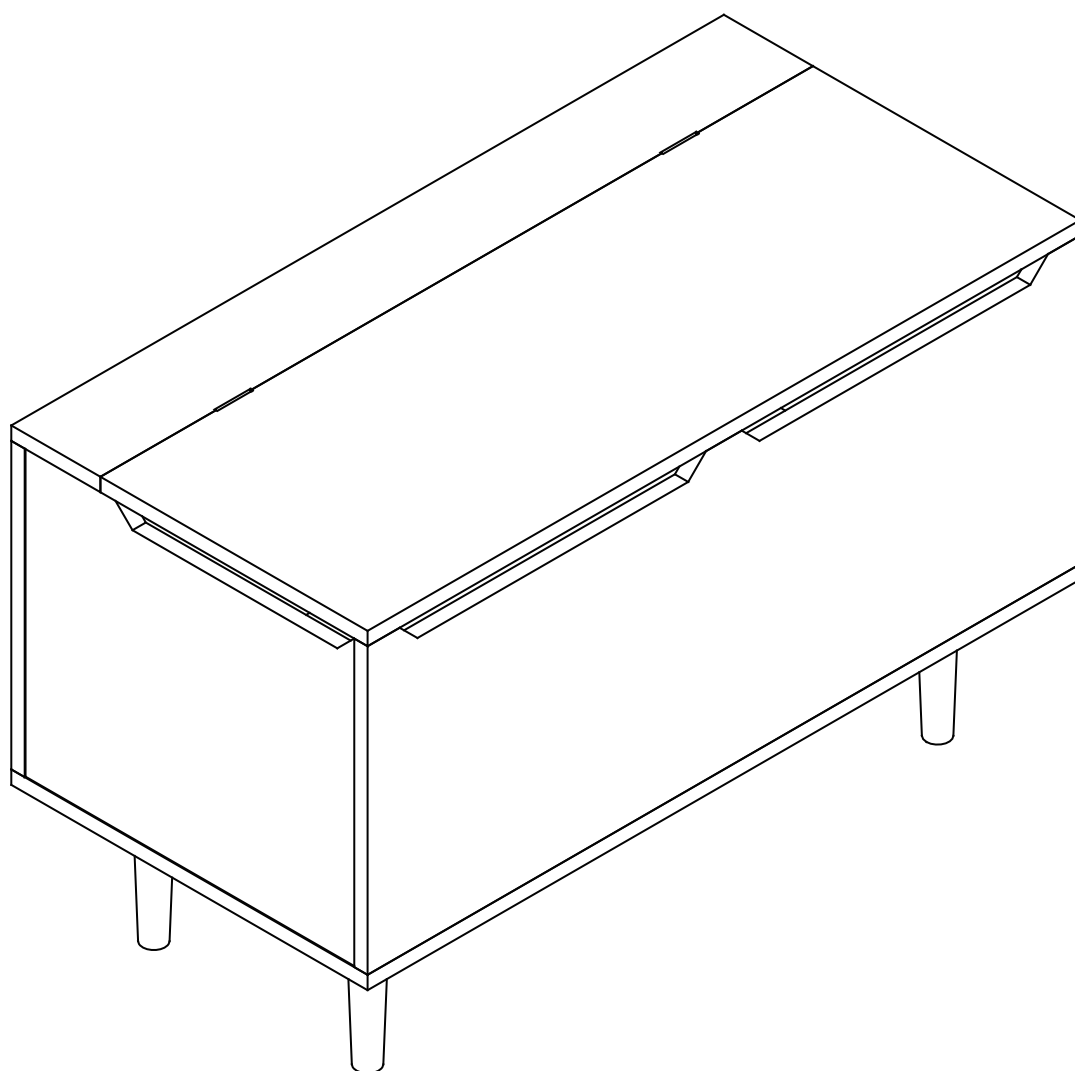

Pod
Storage Box

fantasticfurniture.com.au

Recommended weight capacity : 50kgs on top.



CAUTION: Keep hands away from the hinge/closing mechanism to avoid the risk of finger entrapment injury.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture


Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

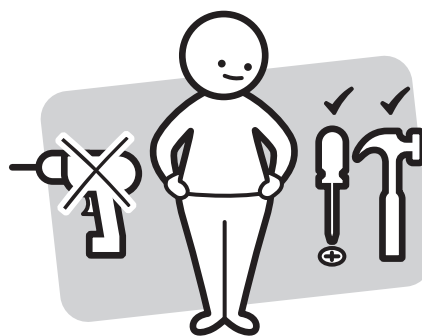

Make sure you have all the required tools. Never use power tools unless instructed.

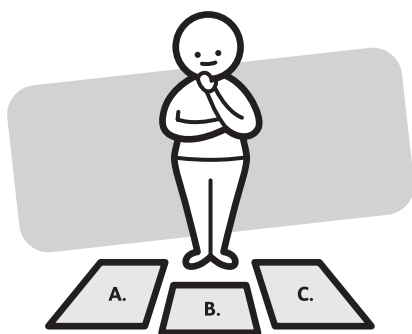

Identify and lay out all of the components before you begin assembly.

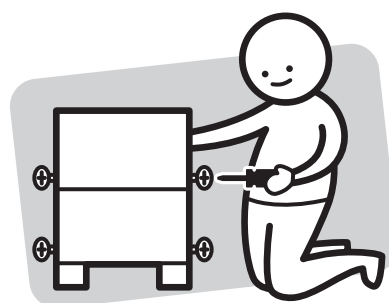

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE




Other tools you need:
Phillips head screwdriver;
Hammer

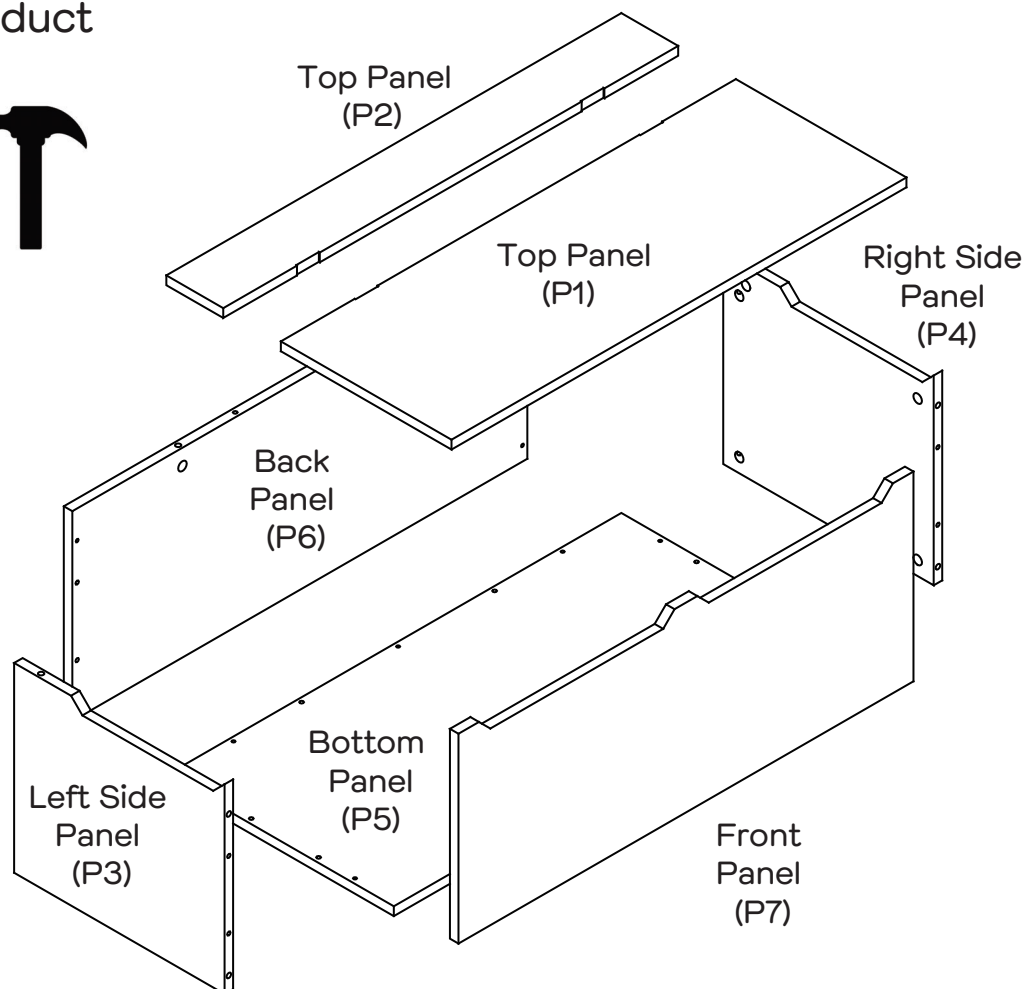


Parts list



Top Panel (P1);
Top Panel (P2);
Left Side Panel (P3);
Right Side Panel (P4);
Bottom Panel (P5);
Back Panel (P6);
Front Panel (P7);
4 x Legs (P8)




Hardware pack

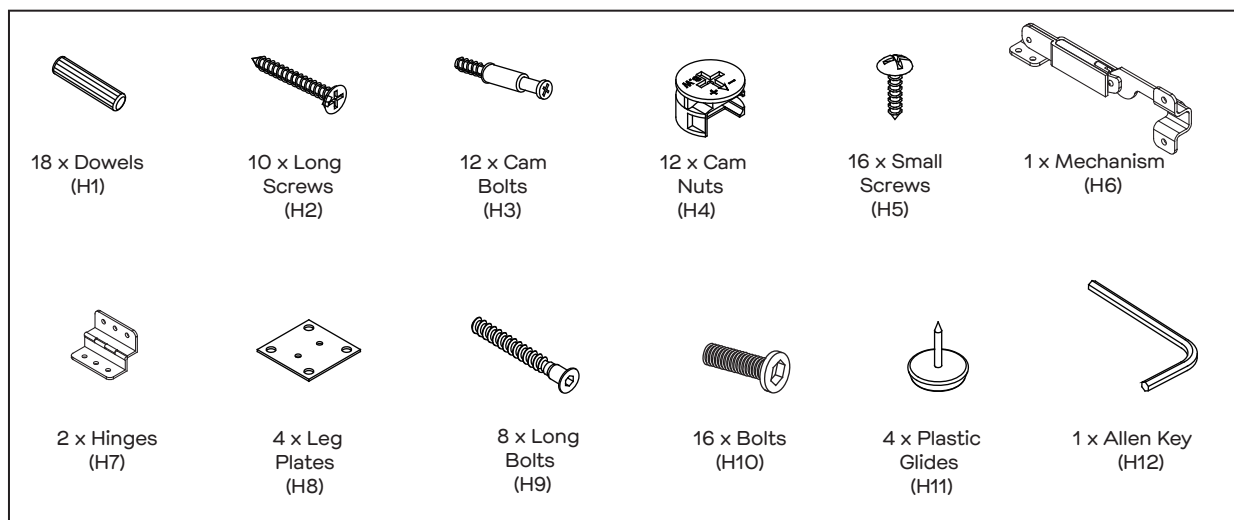




Step 1

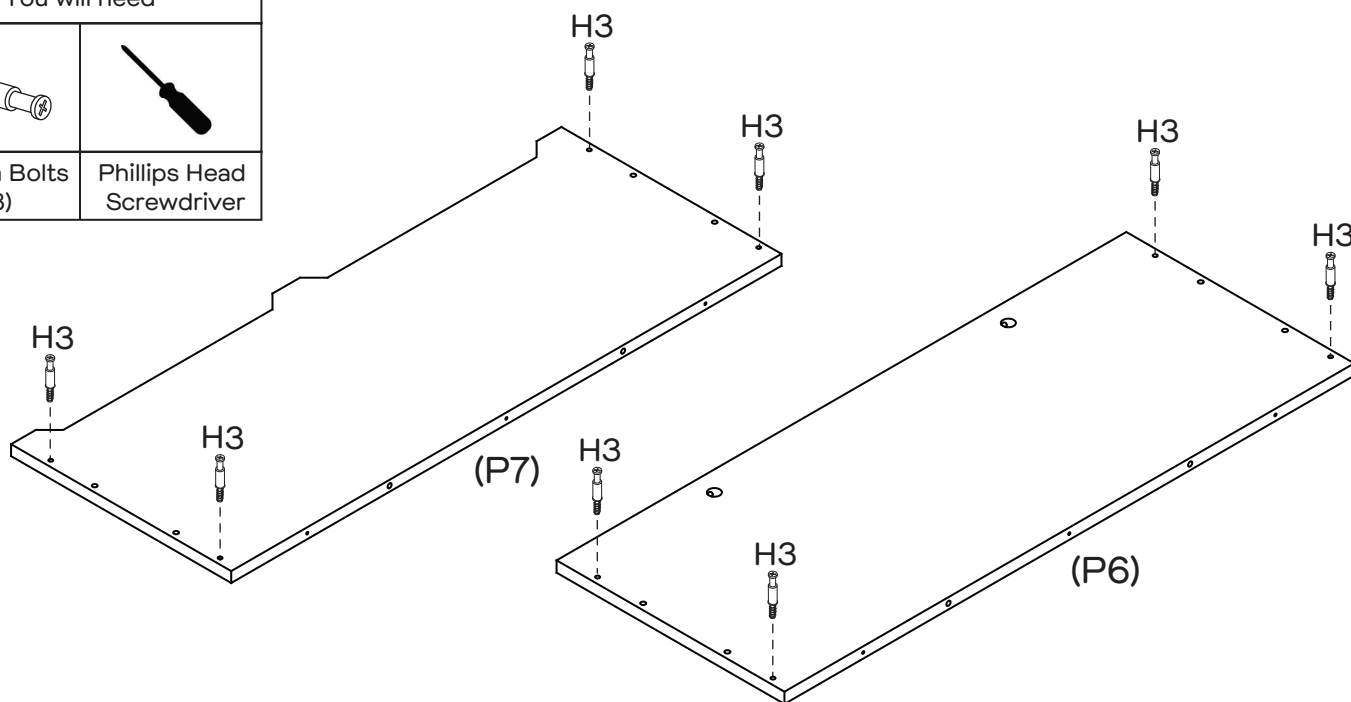
You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver




Attach 8 x Cam Bolts (H3) to Front Panel (P7) and Back Panel (P6) by tightening with the Phillips Head Screwdriver.

Step 2

You will need	
	
8 x Dowels (H1)	8 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

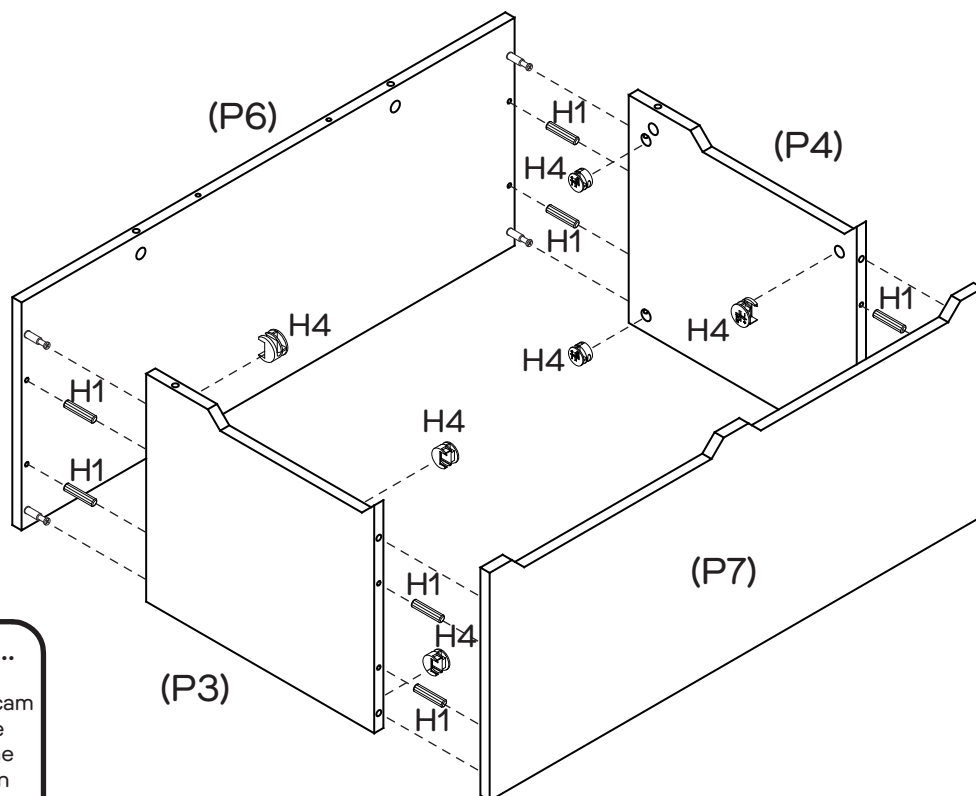




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 8 x Cam Nuts (H4) and 8 x Dowels (H1) into Left & Right Side Panels (P3 & P4) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Front Panel (P7) and Back Panel (P6) to Left & Right Side Panels (P3 & P4) by tightening all cam nuts with the Phillips Head Screwdriver.








Step 3

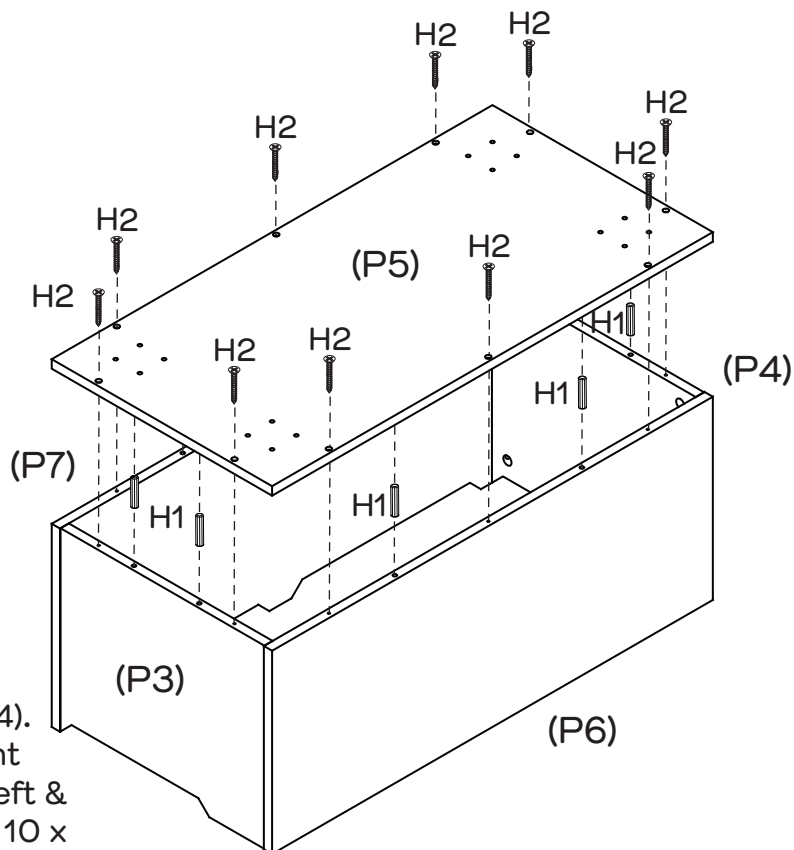
You will need	
	
8 x Dowels (H1)	10 x Long Screws (H2)
	
Phillips Head Screwdriver	



Insert 8 x Dowels (H1) into Front Panel (P7), Back Panel (P6) and Left & Right Side Panels (P3 & P4). Attach Bottom Panel (P5) to Front Panel (P7), Back Panel (P6) and Left & Right Side Panels (P3 & P4) with 10 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.





Step 4

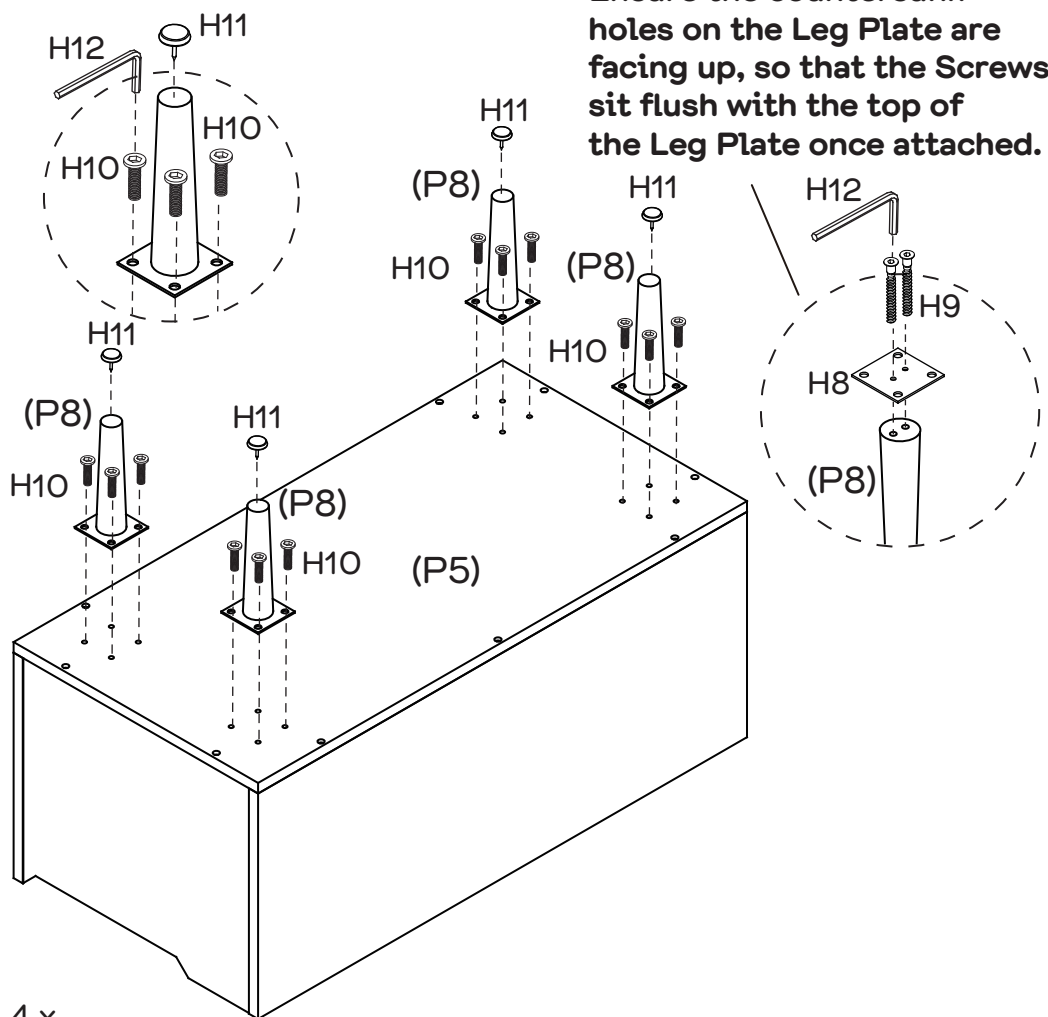
You will need	
	
16 x Bolts (H10)	4 x Plastic Glides (H11)
	
4 x Leg Plates (H8)	8 x Long Bolts (H9)
	
1 x Allen Key (H12)	Hammer
	
Phillips Head Screwdriver	



Secure 4 x Leg Plates (H8) to 4 x Legs (P8) with 8 x Long Bolts (H9) by tightening with an Allen Key (H12). Attach 4 x Legs (P8) to Bottom Panel (P5) with 16 x Bolts (H10) by tightening with an Allen Key (H12). Hammer 4 x Plastic Glides (H11) onto the bottom of Legs (P8).




Step 5

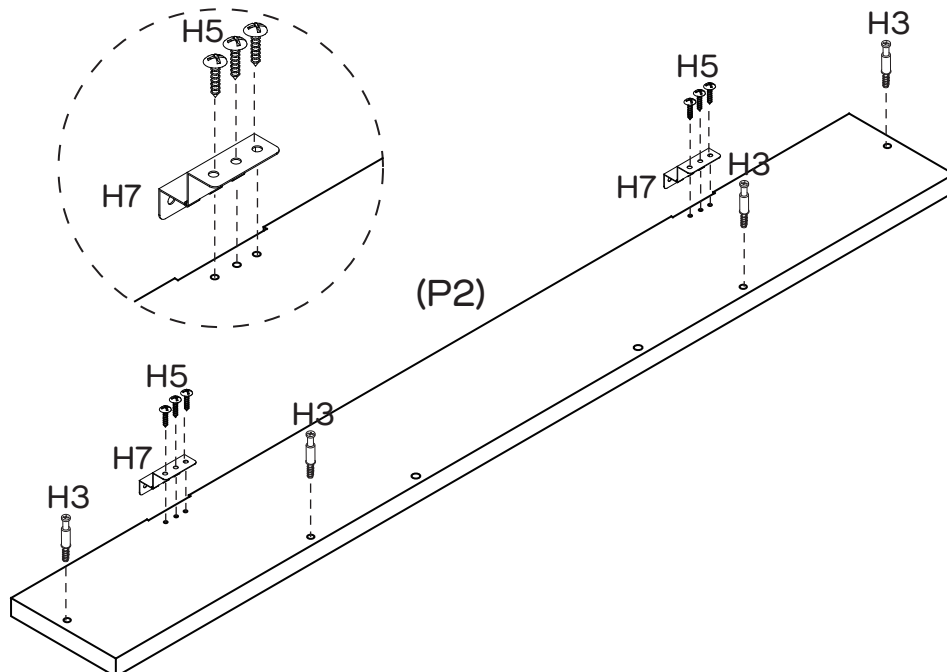
You will need	
	
4 x Cam Bolts (H3)	2 x Hinges (H7)
	
6 x Small Screws (H5)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Top Panel (P2) by tightening with the Phillips Head Screwdriver. Attach 2 x Hinges (H7) to Top Panel (P2) with 6 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.




Step 6

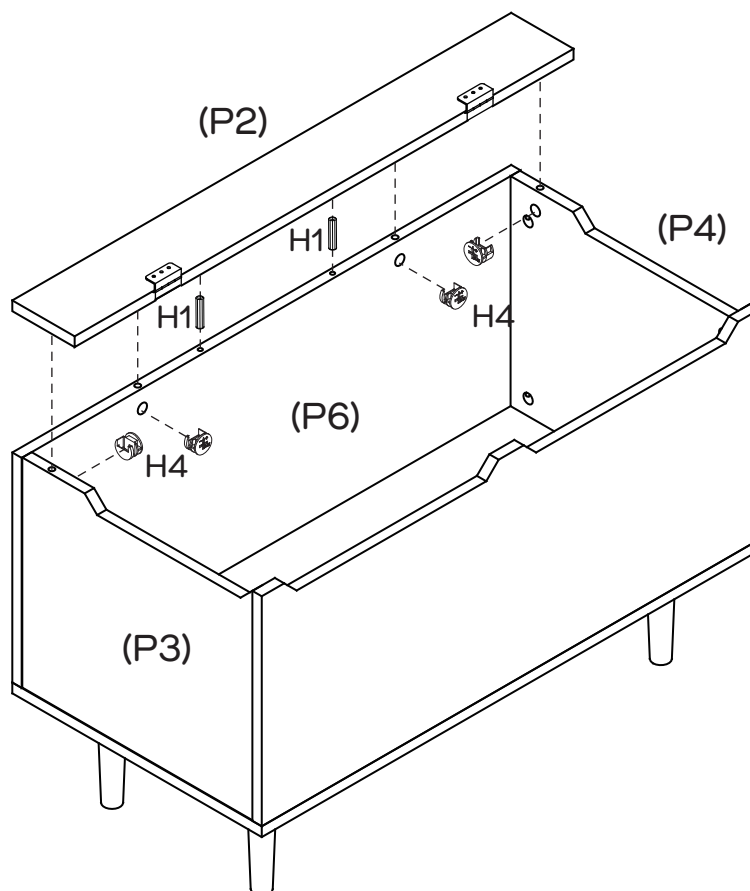
You will need	
	
2 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	




Insert 4 x Cam Nuts (H4) and 2 x Dowels (H1) into Back Panel (P6) and Left & Right Side Panels (P3 & P4) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P2) to Back Panel (P6) and Left & Right Side Panels (P3 & P4) by tightening all cam nuts with the Phillips Head Screwdriver.

Step 7

You will need	
	
1 x Mechanism (H6)	10 x Small Screws (H5)
	
Phillips Head Screwdriver	

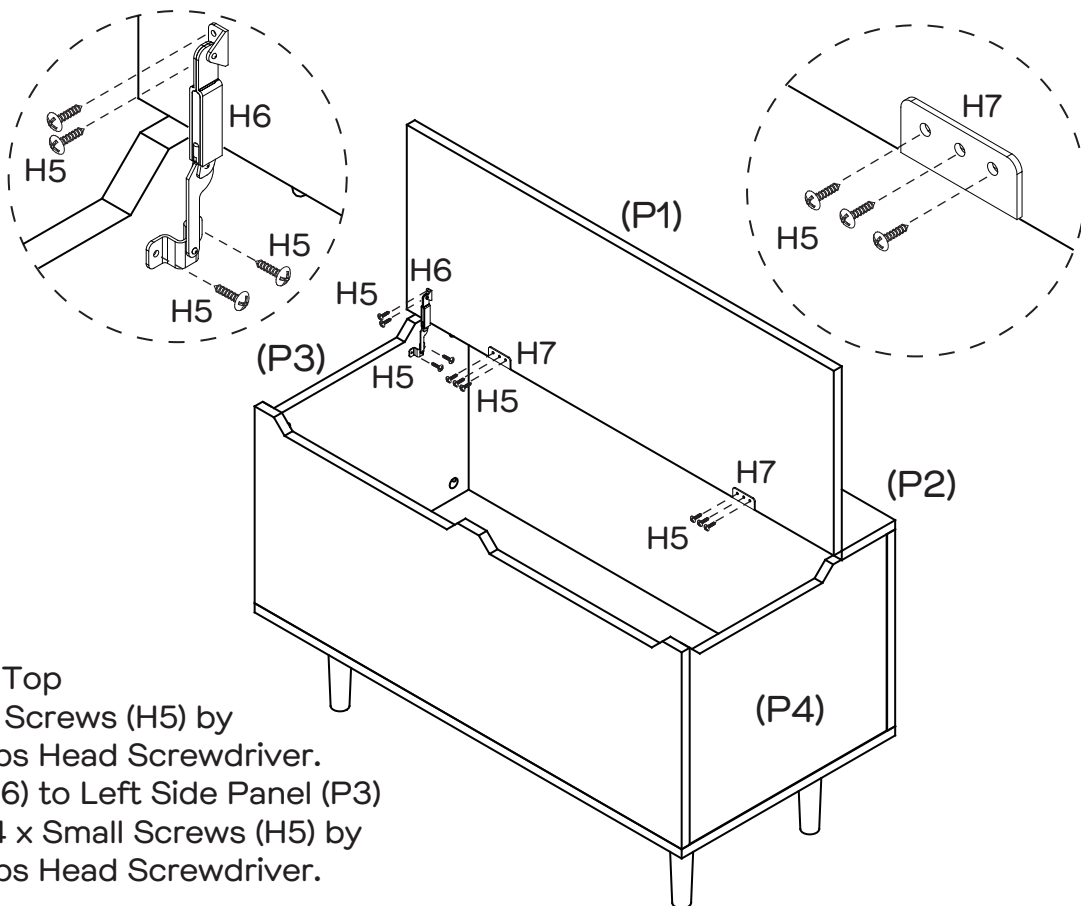

Attach Top Panel (P1) to Top Panel (P2) with 6 x Small Screws (H5) by tightening with the Phillips Head Screwdriver. Attach 1 x Mechanism (H6) to Left Side Panel (P3) and Top Panel (P1) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

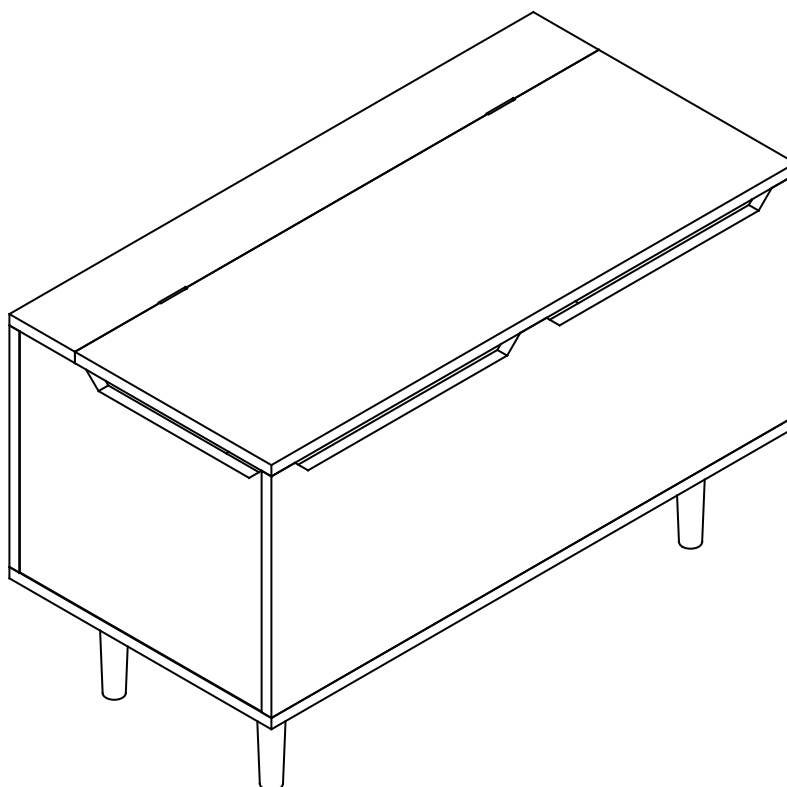

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.