





Version 1.0

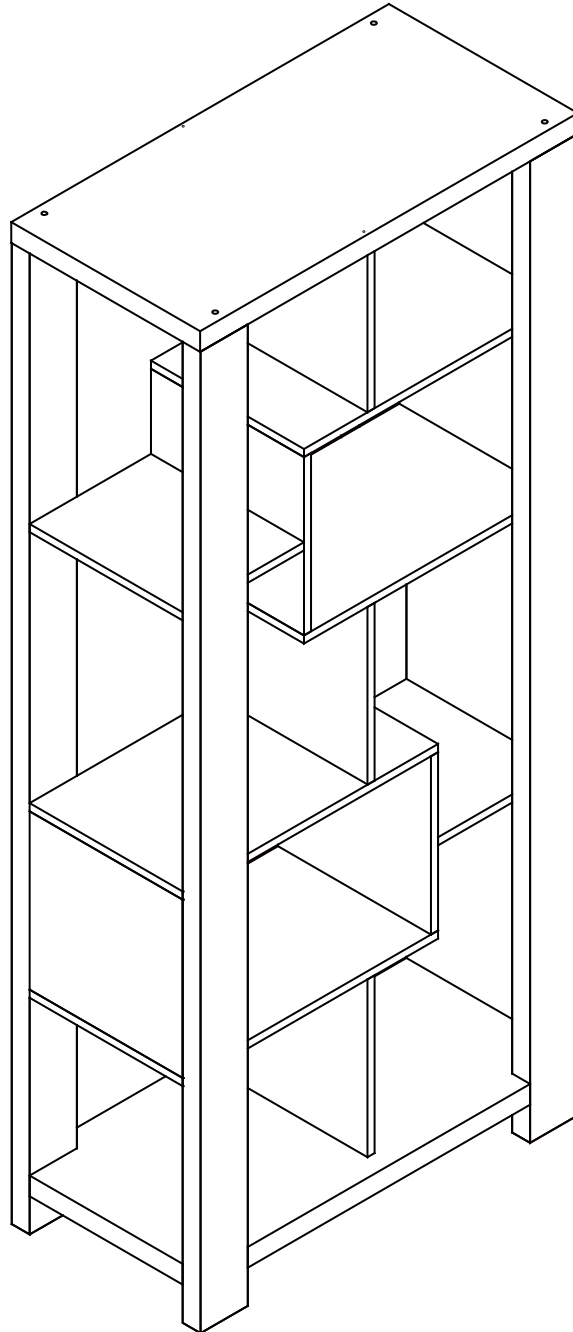

TWO PEOPLE



REQUIRED

# HAVANA

Bookcase

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)

**Recommended weight capacity : 10KG/Shelf.**



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO  
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

**Enjoy**


Your purchase from  
Australia's Best Value Furniture Store




# Assembly checklist




Read through the instructions carefully before you begin.

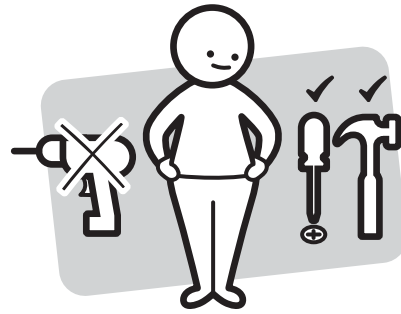

Make sure you have all the required tools. Never use power tools unless instructed.

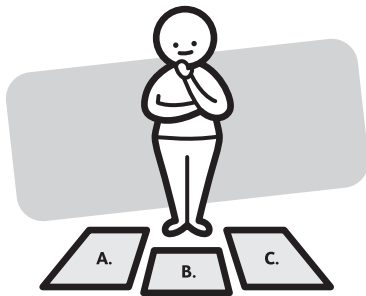

Identify and lay out all of the components before you begin assembly.

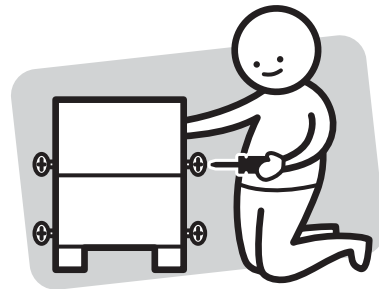

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need to assemble the product



DO NOT USE




## Additional Tools Required

Phillips head screwdriver;  
Hammer

## Parts list


Top Panel (P1)  
Bottom Panel (P2)  
Left Legs (P3) x2  
Right Legs (P4) x2  
Divider Panels (P5) x3  
Shelf Middle Panels (P6) x2  
Shelf Top Panel (P7) x2  
Shelf Bottom Panel (P8) x2  
Small Shelf Panel (P9) x2  
Side Panels (P10) x2

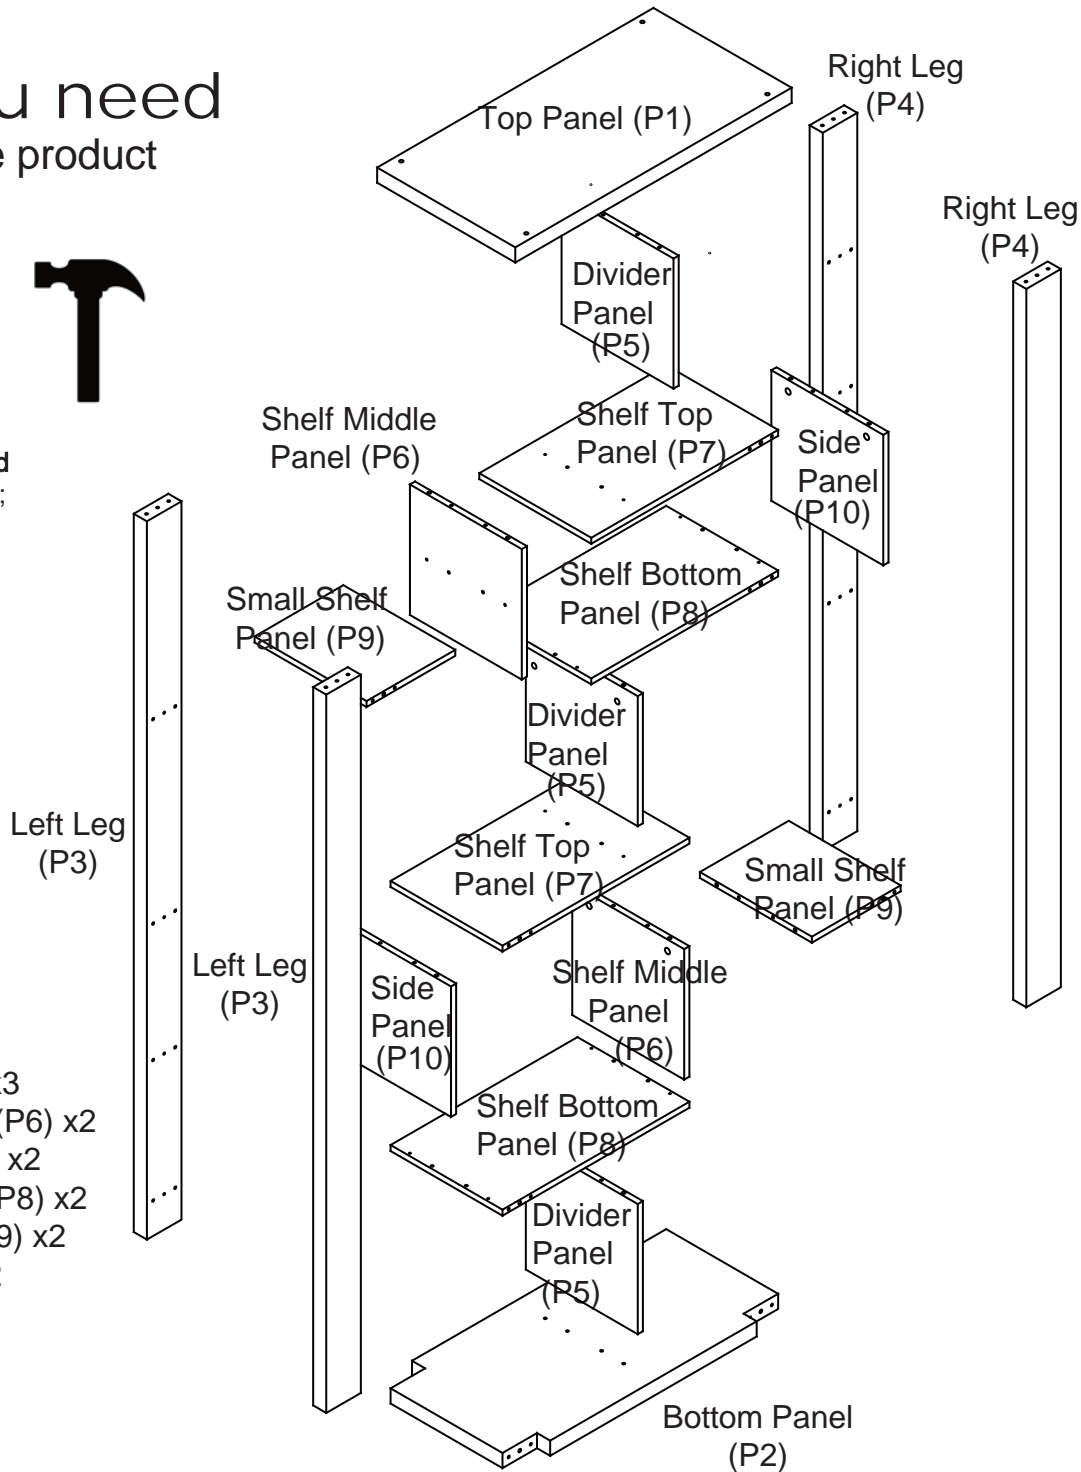


## Hardware pack



72 x Dowels  
(H1)



4 x Bolts  
(H2)




34 x Cam Bolts  
(H3)



34 x Cam Nuts  
(H4)



20 x Screws  
(H5)




1 x Allen key  
(H6)



4 x Plastic Glide  
(H7)



4 x Bracket  
(H8)



1 x Safety  
Strap  
(H9)



1 x Safety  
Strap Screw  
(H10)


2 x Washers  
(H11)



2 x Large Screws  
(H12)



# Step 1


You will need	
	
16 x Cam Bolts (H3)	Phillips head screwdriver

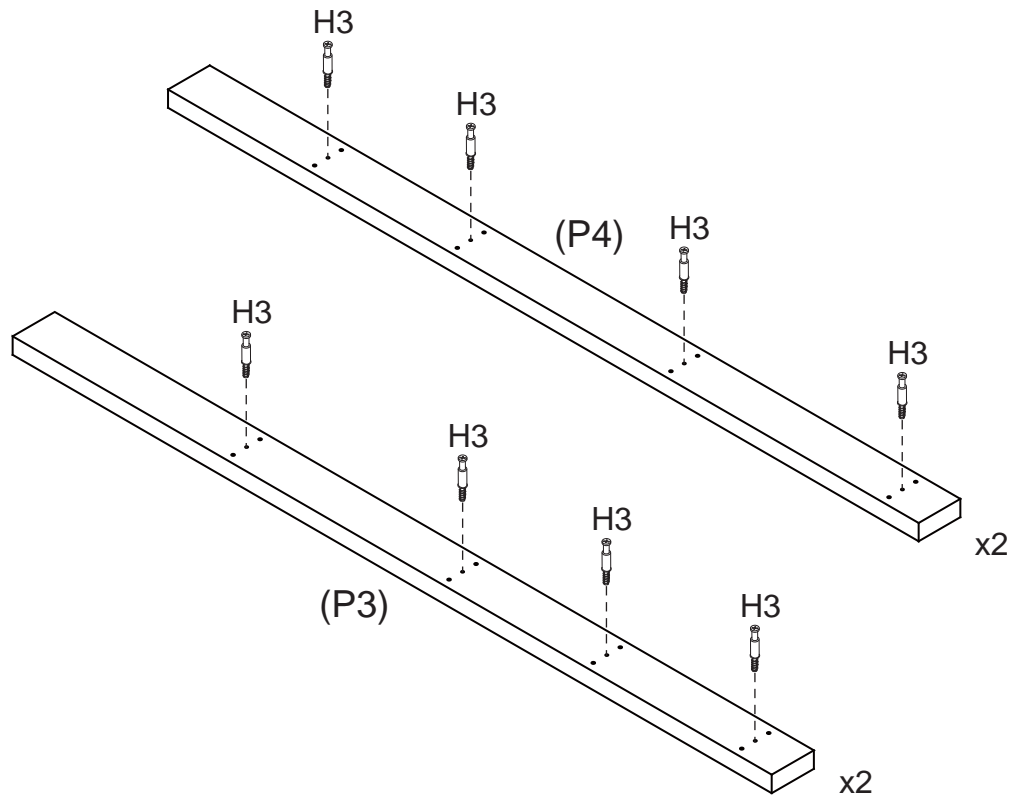

Secure 4 x Cam Bolts (H3) to each Left Leg (P3x2) and 4 x Cam Bolts (H3) to each Right Leg (P4x2) by tightening Cam Bolts (H3) with a Phillips Head Screwdriver.



# Step 2


You will need	
	
2 x Cam Bolts (H3)	Phillips head screwdriver

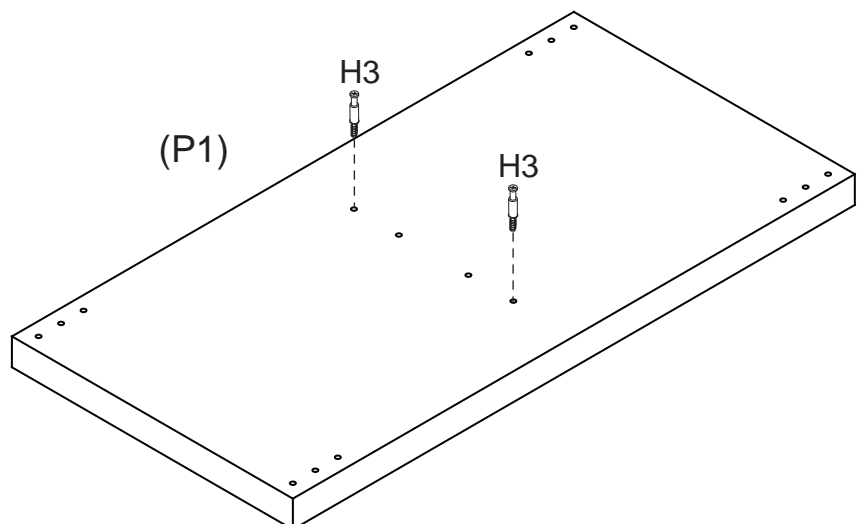

Secure 2 x Cam Bolts (H3) to Top Panel (P1) by tightening Cam Bolts (H3) with a Phillips Head Screwdriver.




# Step 3

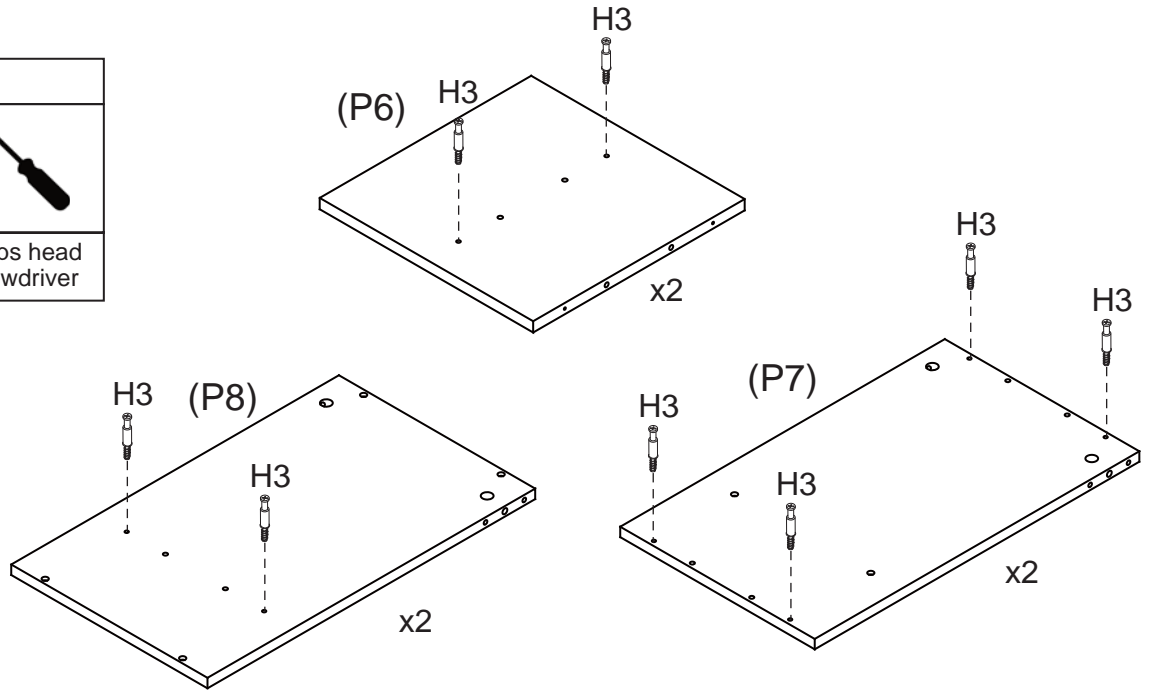
You will need	
	
16 x Cam Bolts (H3)	Phillips head screwdriver



Secure 2 x Cam Bolts (H3) to each Shelf Middle Panel (P6x2), 2 x Cam Bolts (H3) to each Shelf Bottom Panel (P8x2) and 4 x Cam Bolts (H3) to Shelf Top Panel (P7) by tightening Cam Bolts (H3) with a Phillips Head Screwdriver.




# Step 4

You will need	
	
4 x Dowels (H1)	4 x Screws (H5)
	
Phillips head screwdriver	

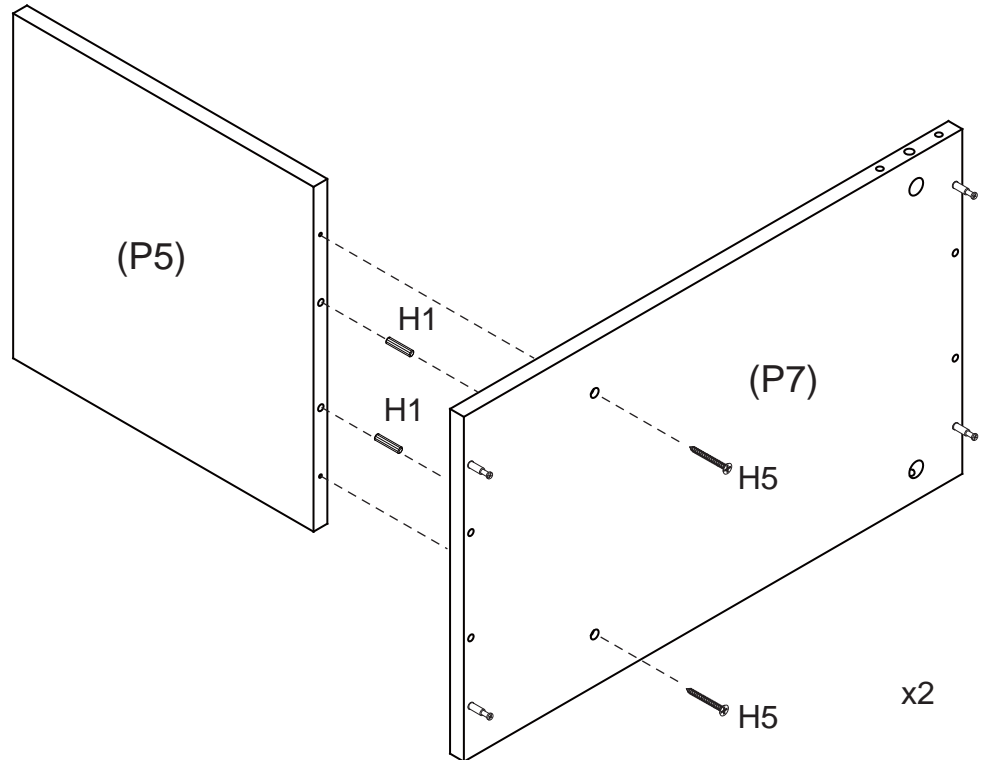


Insert 2 x Dowels (H1) into Shelf Top Panel (P7) and attach Divider Panel (P5) with 2 x Screws (H5) by tightening with a Phillips Head Screwdriver. Repeat this step for the second Shelf Top Panel (P7) and Divider Panel (P5).


# Step 5

You will need	
	
8 x Dowels (H1)	8 x Cam Nuts (H4)
	
Phillips head screwdriver	

This is how a cam nut works.....



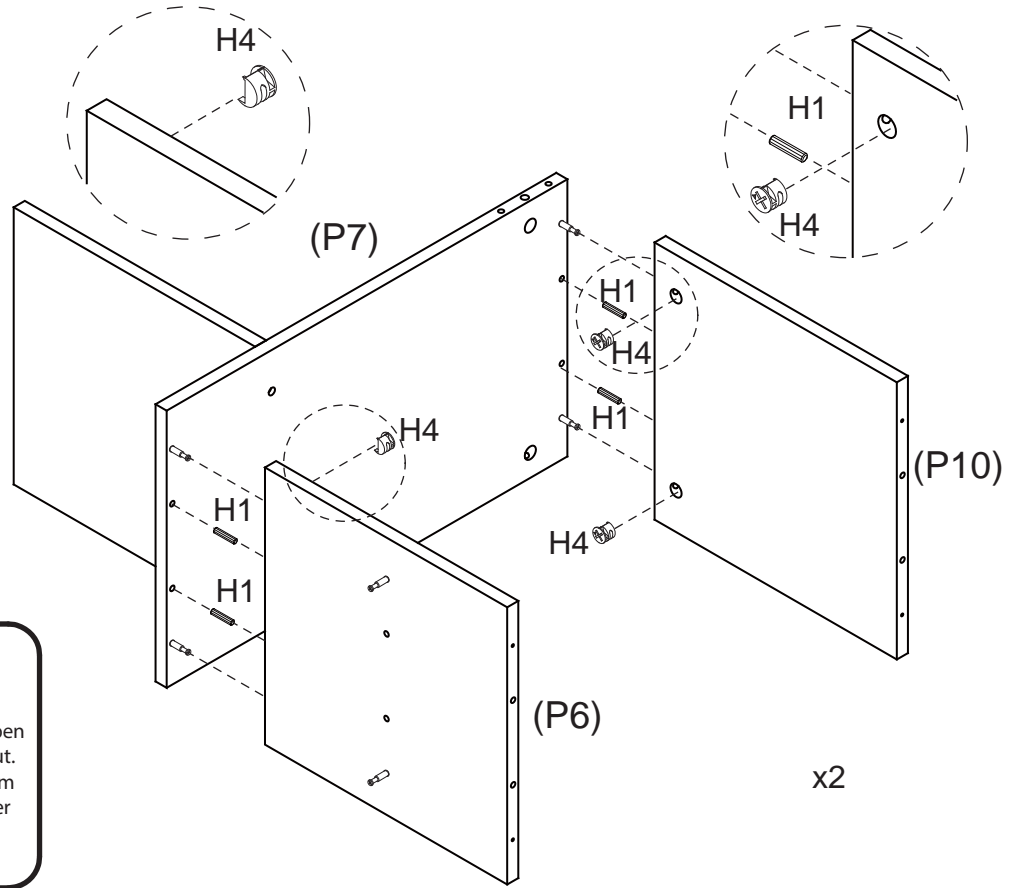


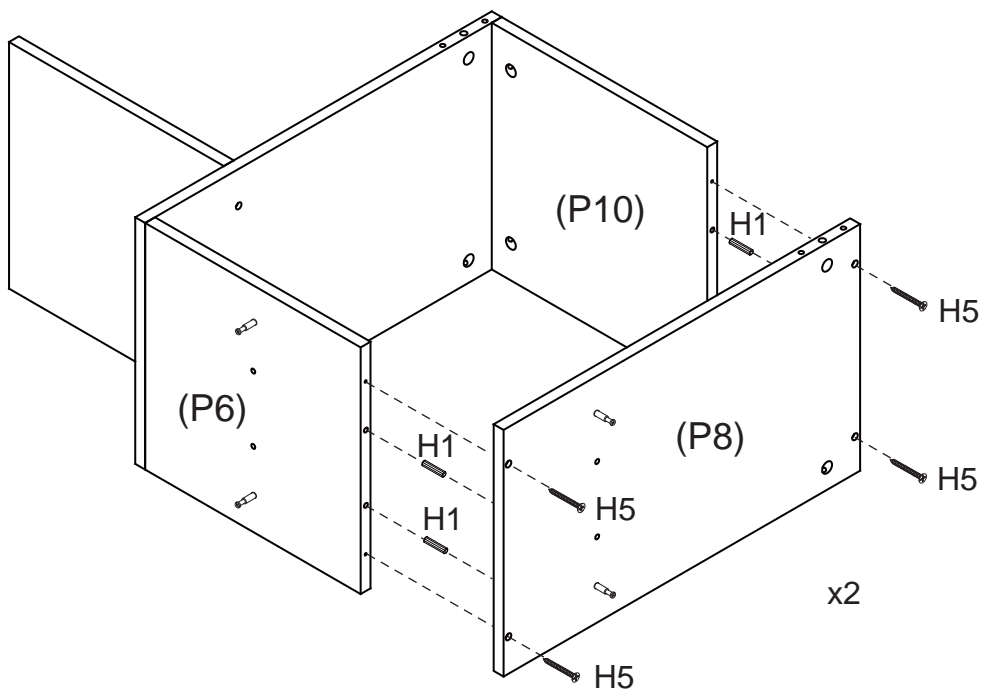
The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Insert 2 x Dowels (H1) into Side Panel (P10) and 2 x Dowels (H1) into Side Middle Panel (P6) then attach to Shelf Top Panel (P7) as shown. Insert 2 x Cam Nuts (H4) into Side Panel (P10) and 2 x Cam Nuts (H4) into Side Middle Panel (P6). Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver. Repeat these steps for second set of panels.




# Step 6


You will need	
	
8 x Dowels (H1)	8 x Screws (H5)
	
Phillips head screwdriver	



Insert 2 x Dowels (H1) into Side Panel (P10) and 2 x Dowels (H1) into Side Middle Panel (P6) then attach to Shelf Bottom Panel (P8) with 4 x Screws (H5) by tightening with the Phillips Head Screwdriver. Repeat these steps for second set of panels.




# Step 7


You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Phillips head screwdriver	

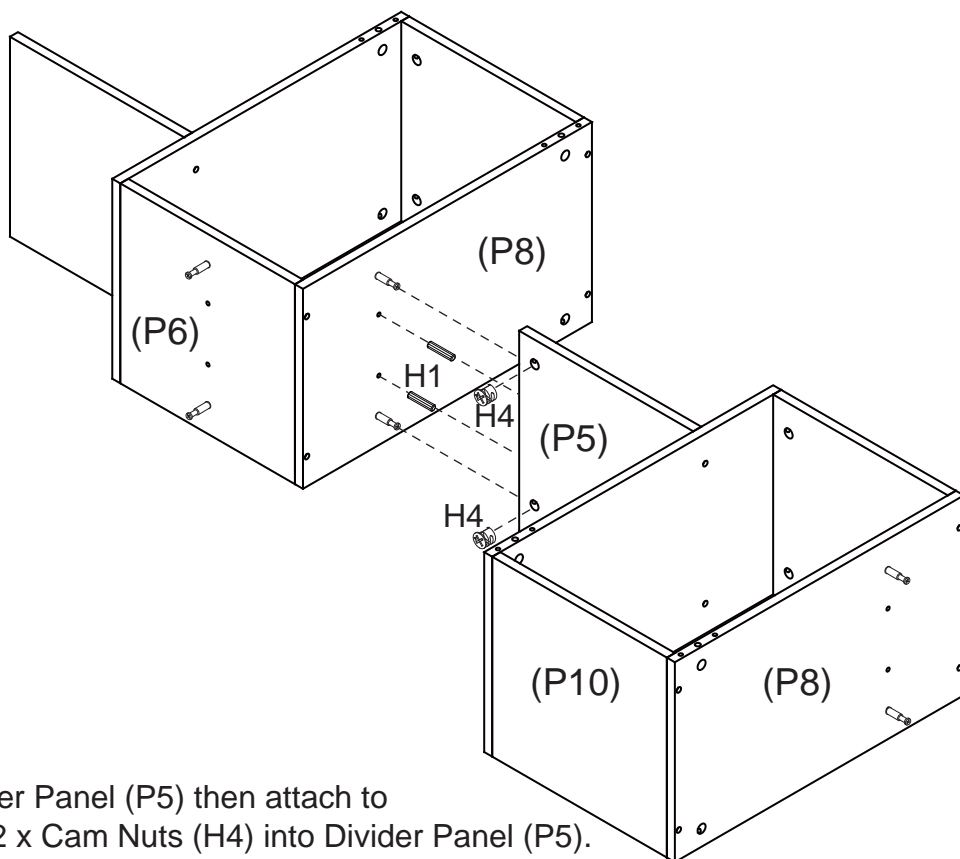

Insert 2 x Dowels (H1) into Divider Panel (P5) then attach to Shelf Bottom Panel (P8). Insert 2 x Cam Nuts (H4) into Divider Panel (P5). Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver.

# Step 8




You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips head screwdriver	

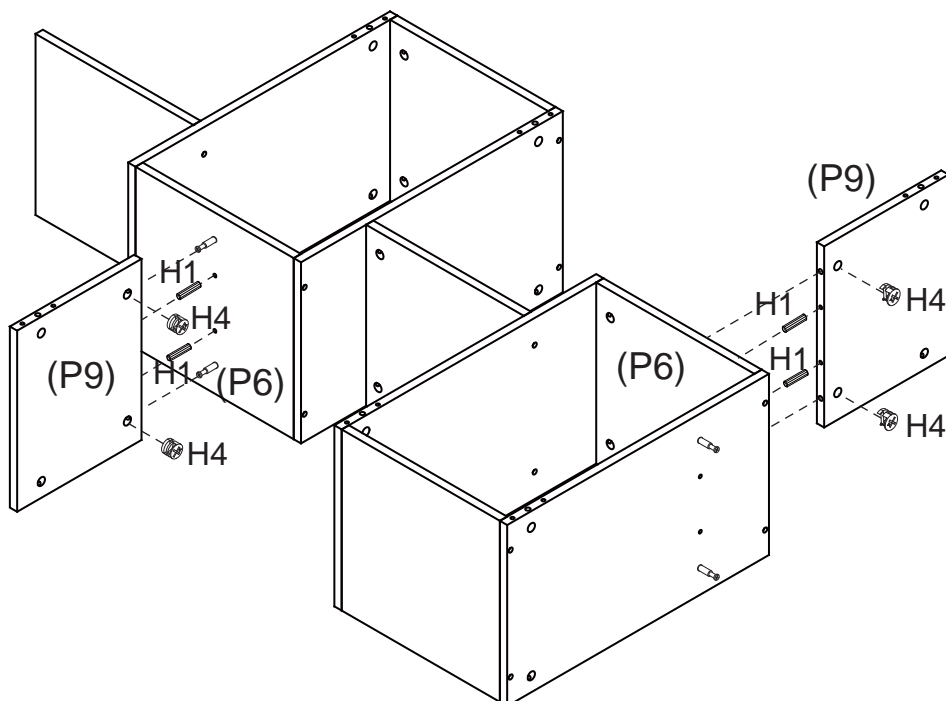


Insert 2 x Dowels (H1) into each Small Shelf Panel (P9x2) then attach to Side Middle Panels (P6x2) as shown. Insert 2 x Cam Nuts (H4) into each Small Shelf Panel (P9x2). Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver.






# Step 9

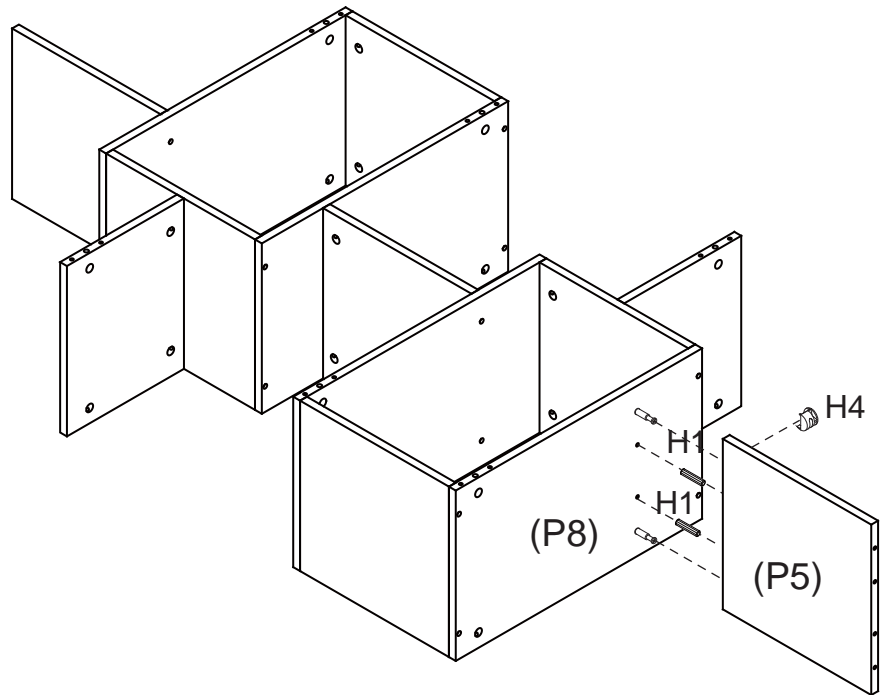
You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Phillips head screwdriver	



Insert 2 x Dowels (H1) into Divider Panel (P5) then attach to Shelf Bottom Panel (P8). Insert 2 x Cam Nuts (H4) into Divider Panel (P5). Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver.




# Step 10

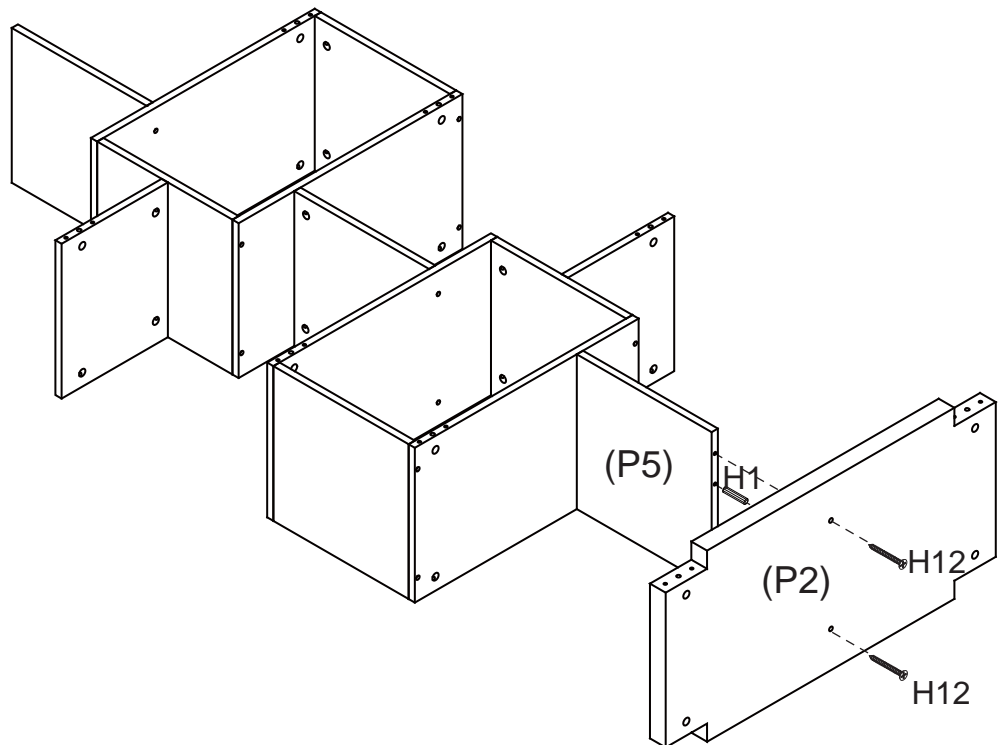You will need	
	
2 x Dowels (H1)	2 x Large Screws (H12)
	
Phillips head screwdriver	



Insert 2 x Dowels (H1) into Divider Panel (P5), attach to Bottom Panel (P2) and secure with 2 x Large Screws (H12) by tightening with a Phillips Head Screwdriver.


# Step 11

You will need	
	
16 x Dowels (H1)	8 x Cam Nuts (H4)
	
Phillips head screwdriver	

TWO PEOPLE






REQUIRED

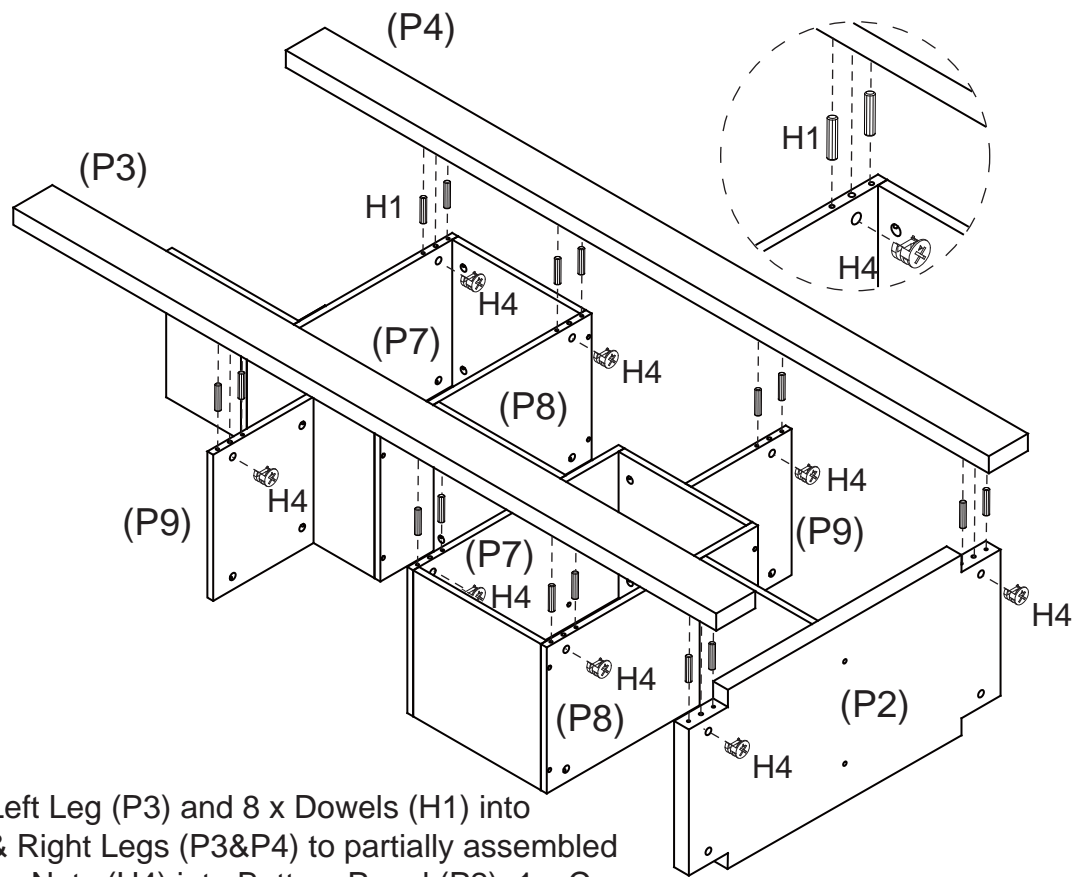

Insert 8 x Dowels (H1) into Left Leg (P3) and 8 x Dowels (H1) into Right Leg (P4). Attach Left & Right Legs (P3&P4) to partially assembled unit as shown. Insert 2 x Cam Nuts (H4) into Bottom Panel (P2), 1 x Cam Nut (H4) into each Shelf Bottom Panel (P8x2), 1 x Cam Nut (H4) into each Small Shelf Panel (P9x2), and 1 x Cam Nut (H4) into each Shelf Top Panel (P7x2) as shown. Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver.


# Step 12

You will need	
	
16 x Dowels (H1)	8 x Cam Nuts (H4)
	
Phillips head screwdriver	

TWO PEOPLE








REQUIRED

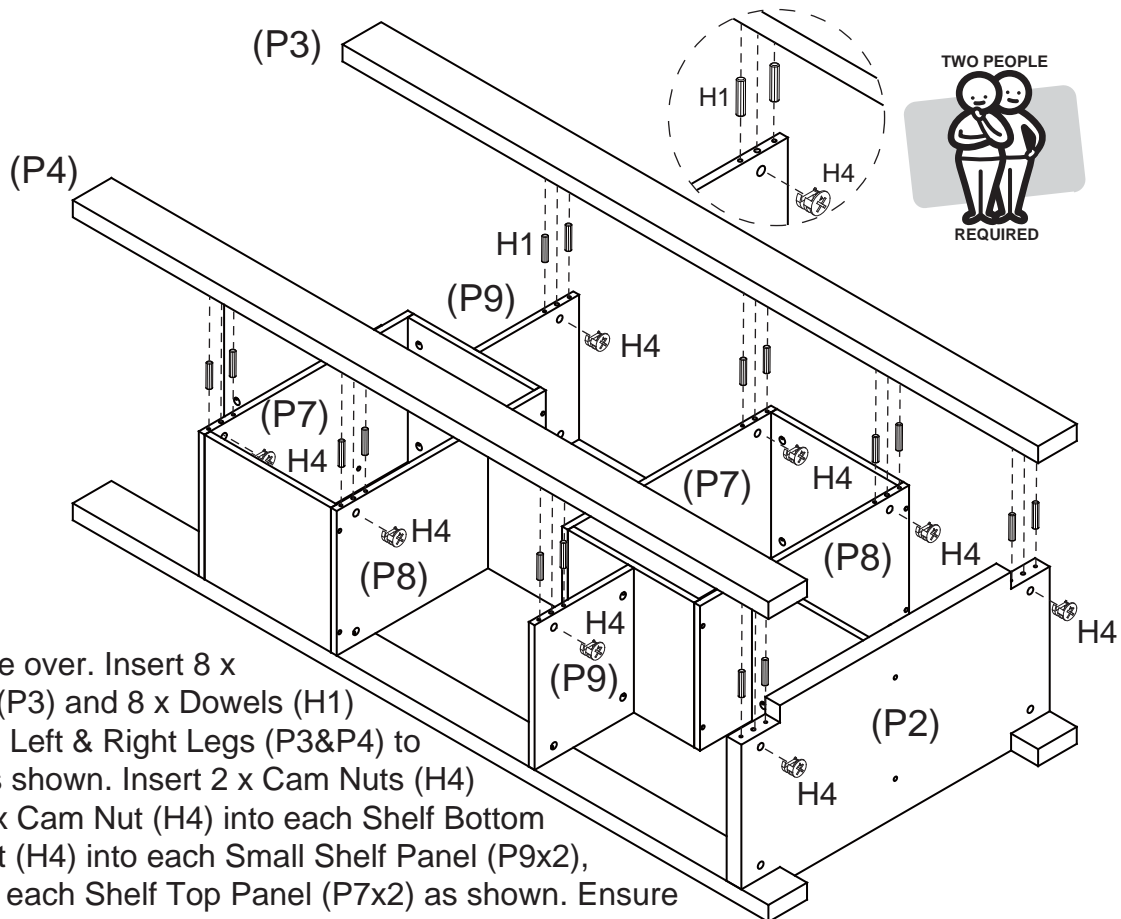

Carefully turn the bookcase over. Insert 8 x Dowels (H1) into Left Leg (P3) and 8 x Dowels (H1) into Right Leg (P4). Attach Left & Right Legs (P3&P4) to partially assembled unit as shown. Insert 2 x Cam Nuts (H4) into Bottom Panel (P2), 1 x Cam Nut (H4) into each Shelf Bottom Panel (P8x2), 1 x Cam Nut (H4) into each Small Shelf Panel (P9x2), and 1 x Cam Nut (H4) into each Shelf Top Panel (P7x2) as shown. Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver.





# Step 13

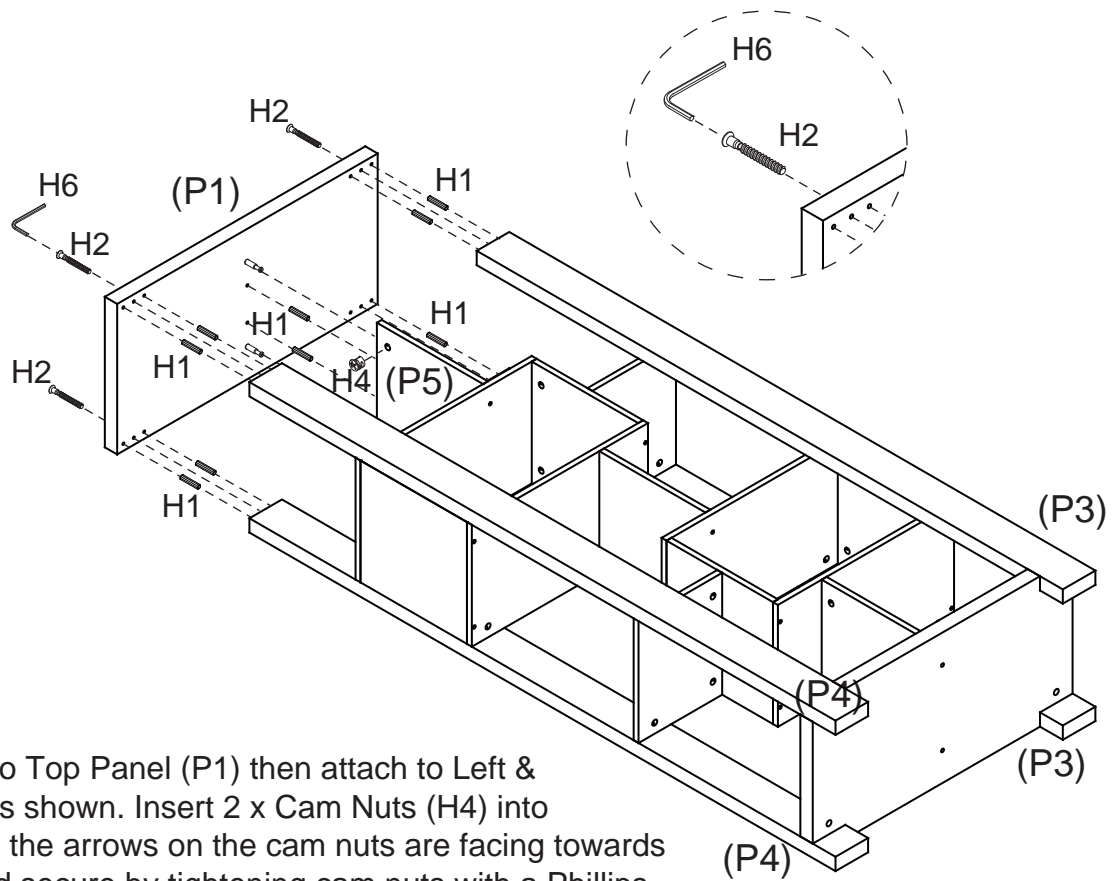
You will need	
	
10 x Dowels (H1)	4 x Bolts (H2)
	
2 x Cam Nuts (H4)	1 x Allen Key (H6)



Insert 10 x Dowels (H1) into Top Panel (P1) then attach to Left & Right Legs (P3x2&P4x2) as shown. Insert 2 x Cam Nuts (H4) into Divider Panel (P5). Ensure the arrows on the cam nuts are facing towards the incoming cam bolts and secure by tightening cam nuts with a Phillips Head Screwdriver. Secure 4 x Bolts (H2) to Top Panel (P1) by tightening with the Allen Key (H6).




# Step 14

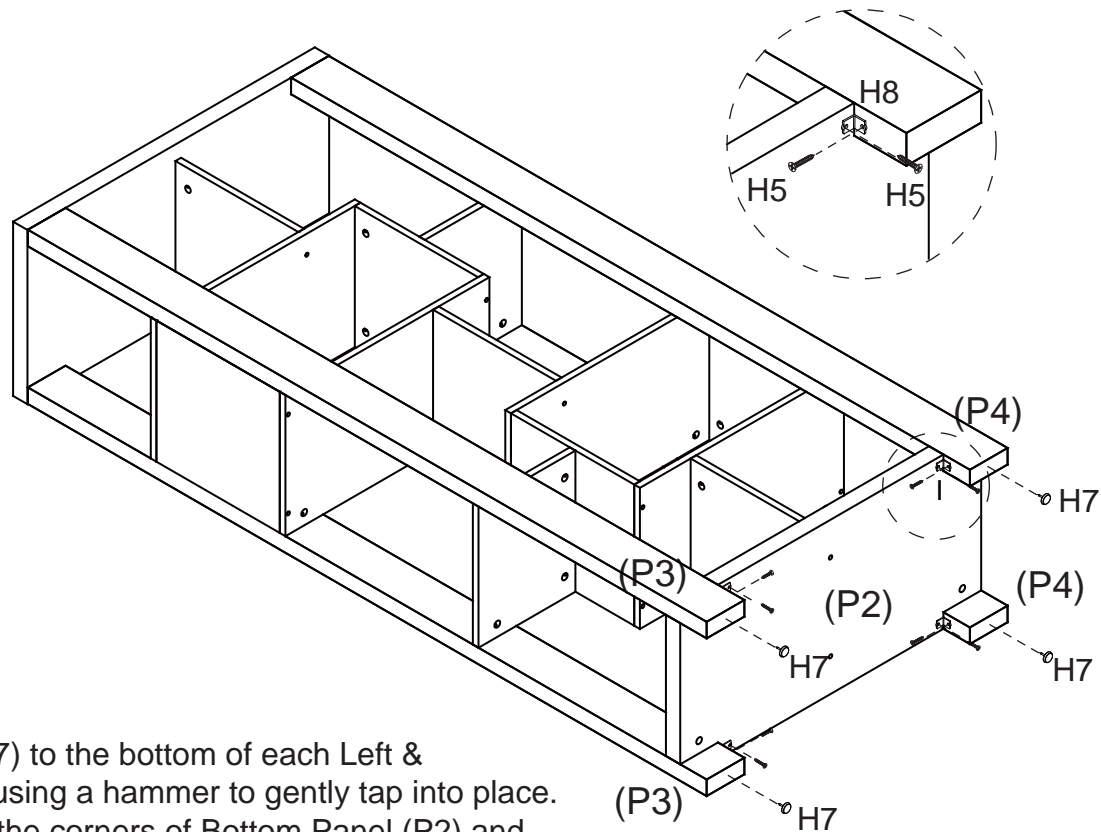You will need	
	
4 x Plastic Glide (H7)	4 x Bracket (H8)
	
8 x Screws (H5)	Hammer





Attach 4 x Plastic Glides (H7) to the bottom of each Left & Right Leg (P3x2&P4x2) by using a hammer to gently tap into place. Attach 4 x Brackets (H9) to the corners of Bottom Panel (P2) and each Left & Right Leg (P3x2&P4x2) with 8 x Screws (H5) by tightening with the Phillips Head Screwdriver.



## Step 15

You will need	
	
1 x Safety Strap (H9)	1 x Safety Strap Screw (H10)
	
1 x Washer (H11)	


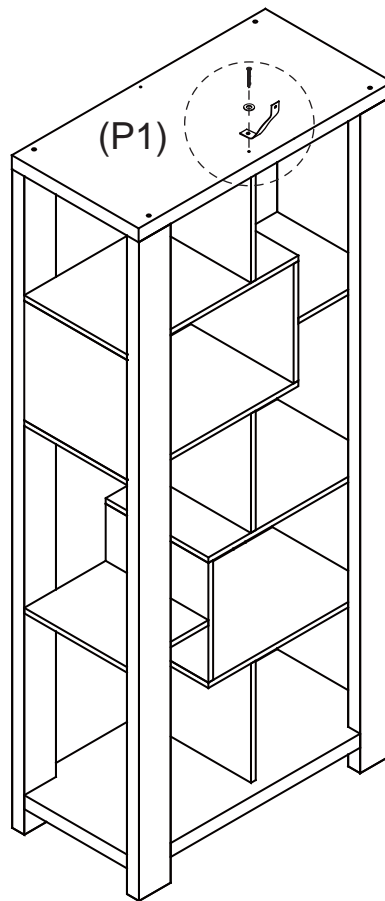
Secure the Safety Strap (H9) to the Top Panel (P1) with 1 x Washer (H11) and 1 x Safety Strap Screw (H10) by tightening with the Phillips Head Screwdriver. \*We strongly advise that you use the wall safety strap provided to prevent the unit from toppling.



## Step 16

You will need	
	
1 x Washer (H11)	Phillips head screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Move the unit into it's final position and then secure the Safety Strap to the wall. Ensure it is firmly attached. Screw and wall plug are not provided. Please use appropriate fixtures for your wall. \* Seek advice from a qualified tradesperson on how to attach this safety strap to your specific wall.

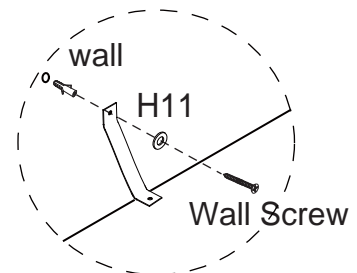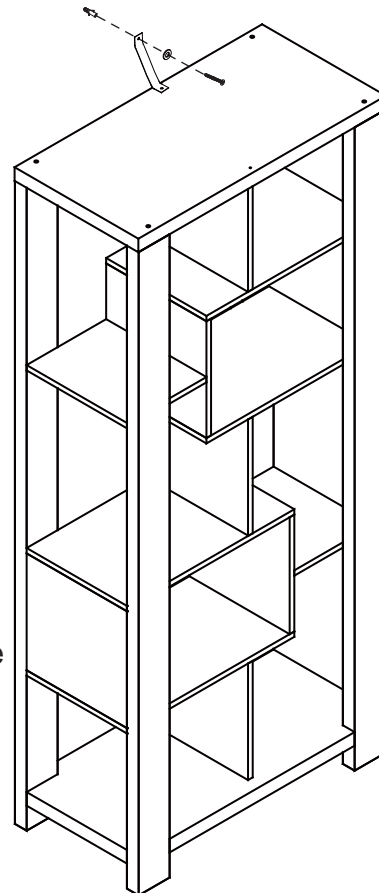

# Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.